


45 MINUTE SCL CORE FIRE DOORS

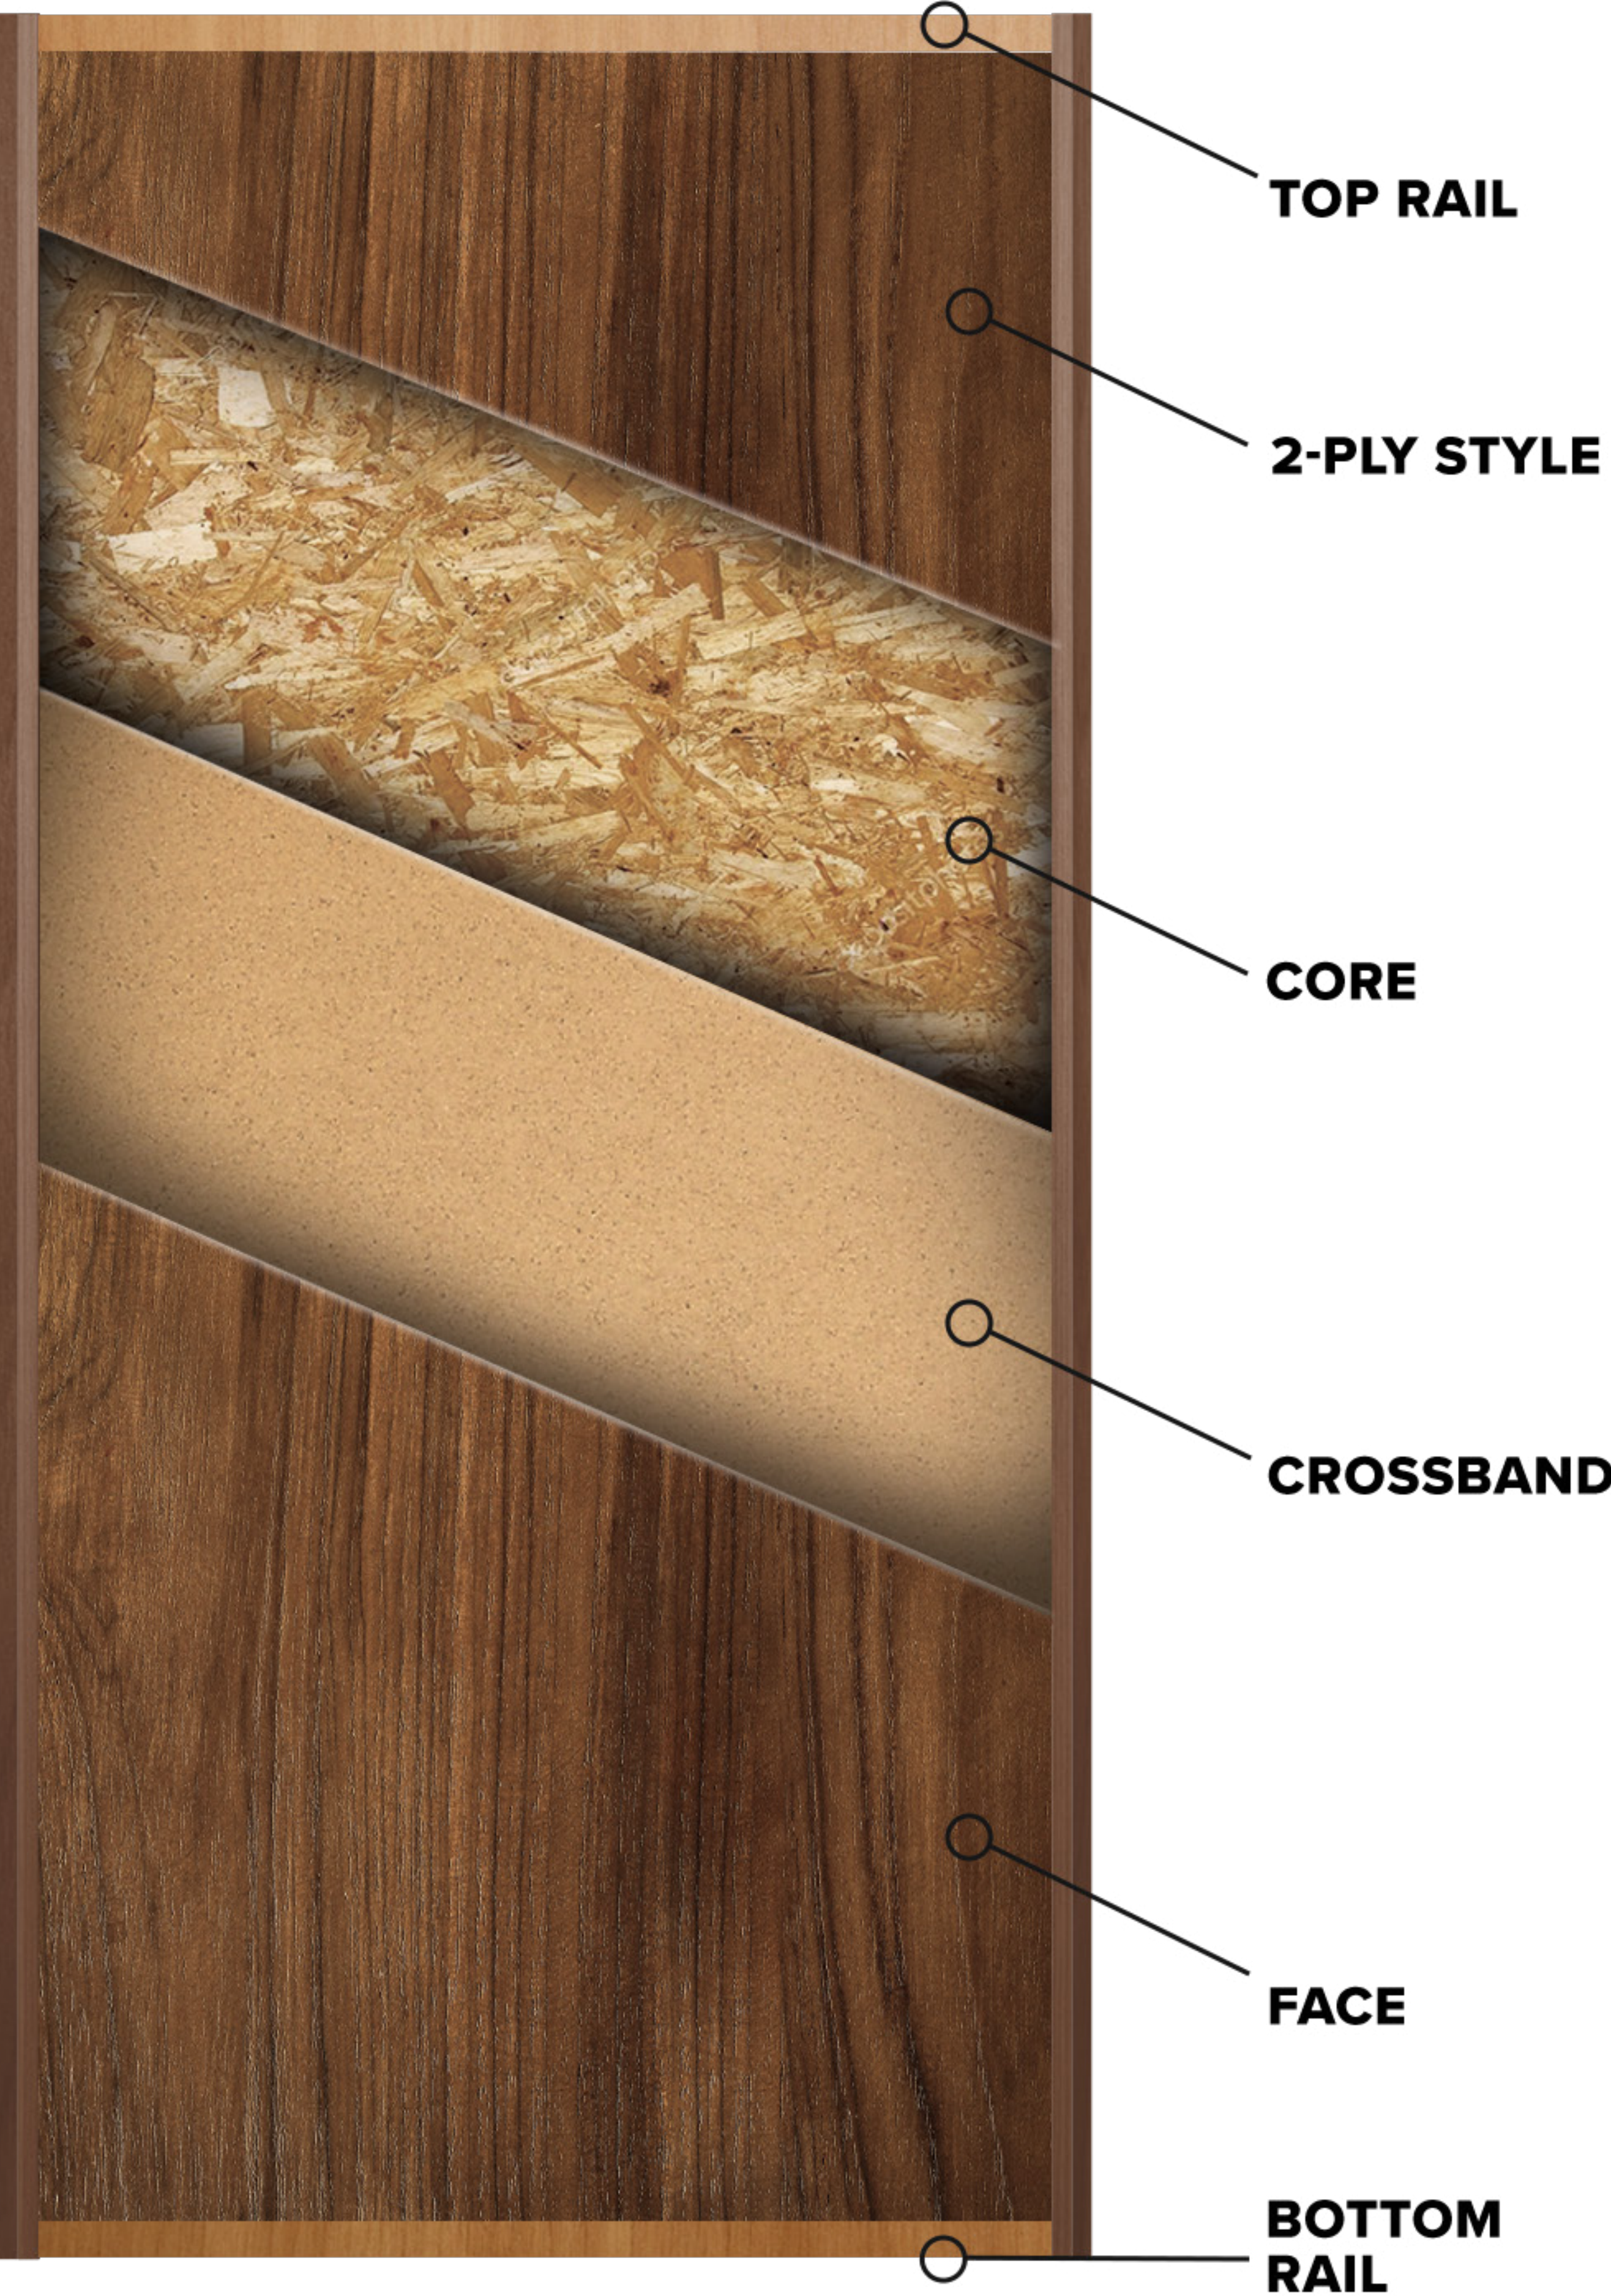

Colors & textures shown are representative, actual colors and textures may vary.

SPECIFICATION DATA

- Meets or exceeds WDMA, AWI and WI industry standards
- Domestic & Exotic Veneer Species, Plastic Laminate, MDO and Hardboard Faces
- Wood stiles matching face veneer standard
- Maximum Size:** 4' x 8' single swing
- Maximum lite size:** Please Inquire
- Finish:** Five standard colors, custom color and finish matching as requested
- Hinges per NFPA No. 80
- Latch-set:** Cylindrical, 2 1/8" diameter max. or listed mortise
- Deadbolt:** Cylindrical up to 2 1/8" diameter max. or listed mortise
- Exit Device:** Listed, surface mounted with through bolts
- Viewer:** Per NFPA No. 80

DESIGN FEATURES

Type:	Single swing
Regulatory Agency:	Labeled and certified by ITS/WHI
Reference Standards:	Meets or exceeds WDMA and AWI industry standards
Grade:	WDMA Custom (standard) or Premium Grade (upon specification)
Thickness:	1 3/4"
Construction:	Traditional 5-ply construction
Stiles:	Fire rated SCL or high density mineral with hardwood edges
Rails:	Fire rated SCL or high density mineral
Core:	Fire rated SCL core
Adhesive:	Thermally activated, Type I, (PVA) water resistant
Faces:	Domestic and exotic wood veneer, plastic laminate, and MDO
Finish:	Factory stain, lacquer or prime coat, according to AWI Finish Systems 1 through 8 available
Edge Protection:	Not required for single swing
Pre-fitting:	Factory pre-fitting available: 1/8" tolerance between top and edges
Machining:	Factory pre-machining available per finish hardware schedule requirements
Packaging:	Polyethylene slipsheets
Warranty:	(5) year standard warranty for interior use only
Positive Pressure:	Meets positive pressure requirements unless noted

