

TEMPORARY LINEAR LIGHTING SOLUTIONS


Outdoor

Ref. TEMPORARY SERIES - TG / TR




LIGHT DISTRIBUTION

TG

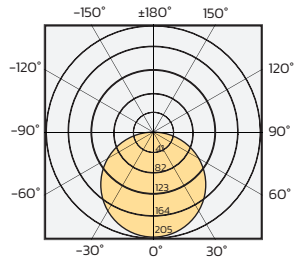


TR

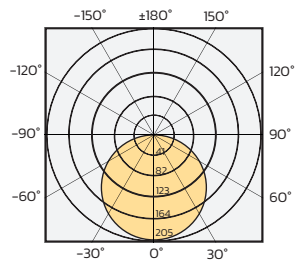

SPECIFICATIONS

Article No.	TG	TR
Color	Green	Red
W/m	14	
LEDs/m	56	
Voltage	230 V AC ±10%	
Power factor	>0,9	
Lifetime (L80, B10)	30,000h	
Beam angle	120°	
IK	10	
IP	67	
Ambient temp	-20 - + 45 °C	
Input cable	200mm H07RN-F with quick connector	
Output cable	200mm H07RN-F with quick connector	
Power cable	3000mm H07RN-F with quick connectors & Schuko plug	
Material	Frosted silicone glue with signal color	
Maximum length	100m	
Cutting length	250mm	
Reel	5m	
Dimmable	YES	

WIRING GUIDE

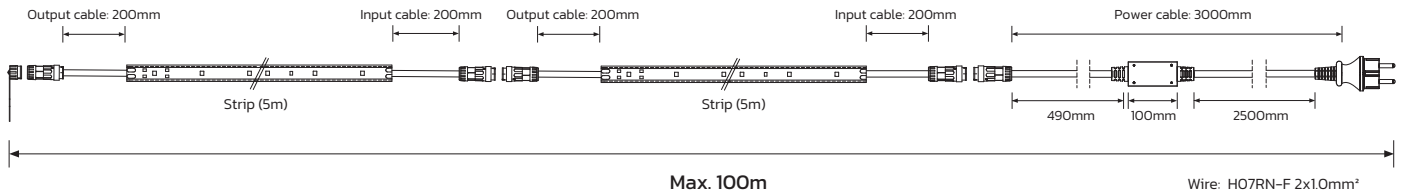

INSTALLATION METHODS



Profile




Clip & Screw



Cable ties

DIMENSIONS



PACKING INFO (TG/TR)

Reel	Size(mm)	Weight(kg)
5m	∅220 x H105	2