GENERAL LINEAR LIGHTING SOLUTIONS

Indoor/Outdoor

Ref. GENERAL SERIES – CCTK120

230V IP65 IK08 EMC LVD CE

SPECIFICATIONS

Article No.	CCTK120
LEDs/m	120
LED type	2835
W/m	2x6W
Efficiency(lm/W)	>100
Voltage	230 V AC ± 10%
Beam angle	120°
Color	Range 2700K-6500K
Power factor	>0,9
IK	08
IP	65
Ambient temp	-20 – + 45 °C
Lifetime L80 B10	30,000h
Material	Silicone
Cutting length	100mm
Maximum connectable length	100m
Reel	10/25/50m

LIGHT DISTRIBUTION

CCTK 120 2700K



WIRING GUIDE

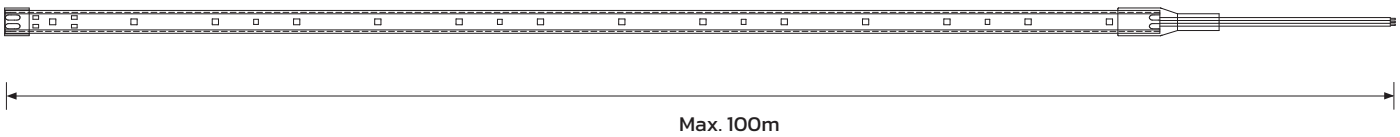

INSTALLATION METHODS

Profile

Clip & Screw

Cable ties

DIMENSIONS



PACKING INFO (CCTK120)

Reel	Size(mm)	Weight(kg)
100m	L490xW250xH260	13