

TEMPORARY LINEAR LIGHTING SOLUTIONS

Outdoor

Ref. TEMPORARY SERIES - T100



OPTIONS

	Power	LEDs/m	Size	Max. Length	Working hours	Lifetime (L70,B10)	Article No.
Light Duty	14W/m	56	12X5mm	100m	<10h/day	25,000h	T100L
Heavy Duty	14W/m	112	12X5mm	100m	24h/day	35,000h	T100H


*Configuration options available upon request.

SPECIFICATIONS


Article No.	T100L	T100H
LEDs/m	56	112
Cutting length	250mm	125mm
Lifetime (L70, B10)	25000h	35000h
Voltage	230 V AC ± 10%	
W/m	14	
Lumen/M	1300	
Lumen/W	>90	
CCT	6000K	
Power factor	>0,9	
Beam angle	120°	
CRI	>80	
IK	10	
IP	67	
Ambient temp	-20 - + 45 °C	
Input cable	200mm H07RN-F with quick connector	
Output cable	200mm H07RN-F with quick connector	
Power cable	3000mm H07RN-F with quick connectors & Schuko plug	
Material	Frosted silicone & Glow effect	
Maximum length	100m	
Reel	10/25/50m	
Dimmable	Yes	

LIGHT DISTRIBUTION


T100

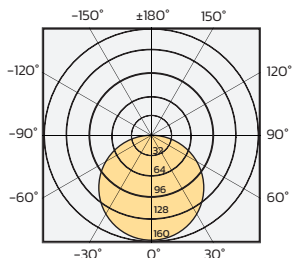


WIRING GUIDE

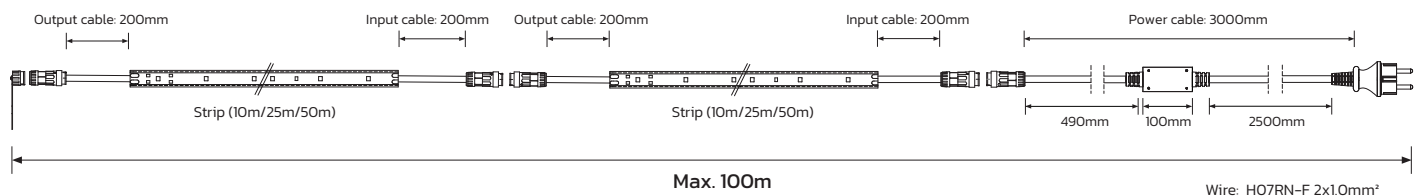

INSTALLATION METHODS



DIMENSIONS



PACKING INFO

Reel	Size(mm)	Weight(kg)
10m	Ø220 x H45	2
25m	Ø350 x H85	3,3
50m	Ø220 x H215	6,5