

ELEVATOR LINEAR LIGHTING SOLUTIONS


Indoor/Outdoor

Ref. **ELEVATOR SERIES - E30/E60**




LIGHT DISTRIBUTION

E30

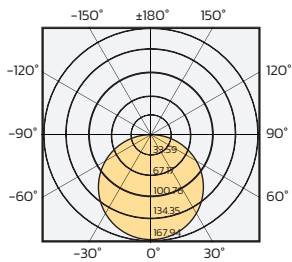


E60

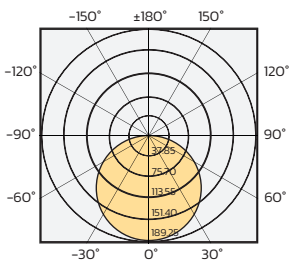

SPECIFICATIONS

Article No.	E30	E60
W/m	5	6,4
Lumen/M	450	600
Lumen/W	90	93
Shaft Area (m ²), in compliance with (EN-81)	3,5	9,2
LEDs/m	14	
CCT	6000K	
Voltage	230 V AC ± 10%	
Power factor	>0,9	
Lifetime (L70, B10)	30.000h	
Beam angle	120°	
CRI	>80	
IK	08	
IP	65	
Ambient temp	-20 - + 45 °C	
Input cable	Bare cable ends/Power cable optional	
Material	Anti-glaring frosted silicone	
Maximum length	300m	
Cutting length	500mm	
Approval	EN81-20/50	

WIRING GUIDE

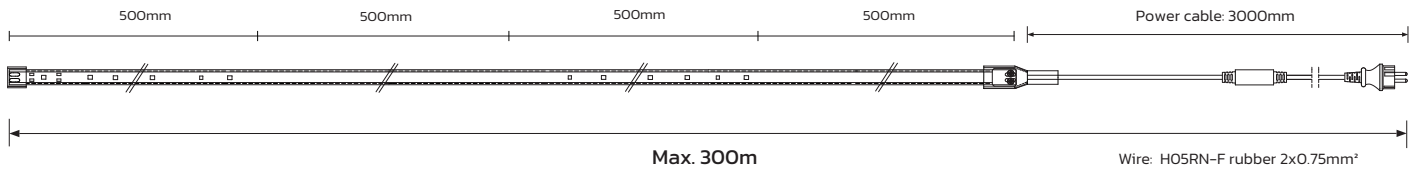

INSTALLATION METHODS




Cable ties



Wall plugs

DIMENSIONS



PACKING INFO (E30/E60)

Reel	Size(mm)	Weight(kg)
300m	Ø400 x H200	15,5