

TEMPORARY LINEAR LIGHTING SOLUTIONS

Outdoor

Ref. **TEMPORARY SERIES - T300/T500**




OPTIONS

	Power	LEDs/m	Size	Cutting length	Max. Length	Working hours	Lifetime (L70,B10)	Article No.
Light Duty	3W/m	11	12X5mm	250mm	300m	<10h/day	25,000h	T300L
Heavy Duty	3W/m	22	12X5mm	125mm	300m	24h/day	35,000h	T300H
Light Duty	3W/m	11	22X5mm	250mm	500m	<10h/day	25,000h	T500L
Heavy Duty	3W/m	22	22X5mm	125mm	500m	24h/day	35,000h	T500H


*Configuration options available upon request.

LIGHT DISTRIBUTION

T300

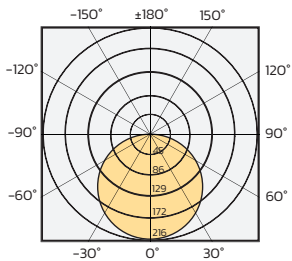


T500

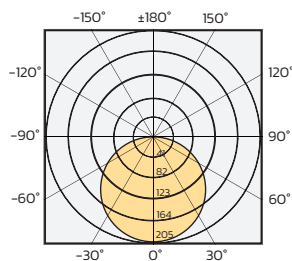

SPECIFICATIONS

Article No.	T300L/T300H	T500L/T500H
LEDs/m	11/22	11/22
Maximum length	300m	500m
Lifetime (L70, B10)	25000h/35000h	25000/35000h
Reel	10/25/50m	25m
W/m		3
Lumen /M		260
Lumen/W		85
Voltage		230 V AC ±10%
CCT		6000K
Power factor		>0,9
Beam angle		120°
CRI		>80
IK		10
IP		67
Ambient temp		-20 - + 45 °C
Input cable		200mm HO7RN-F with quick connector
Output cable		200mm HO7RN-F with quick connector
Power cable		3000mm HO7RN-F with quick connectors & Schuko plug
Material		Frosted silicone & Glow effect
Dimmable		Yes

WIRING GUIDE

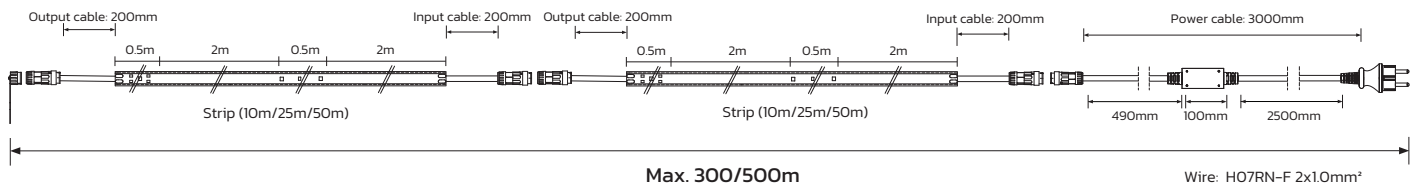

INSTALLATION METHODS



Profile





Clip & Screw



Cable ties

DIMENSIONS



PACKING INFO (T300)

Reel	Size(mm)	Weight(kg)
10m	Ø220 x H45	2
25m	Ø220 x H105	3,5
50m	Ø220 x H215	8

PACKING INFO (T500)

Reel	Size(mm)	Weight(kg)
25m	Ø220 x H215	8