

GENERAL LINEAR LIGHTING SOLUTIONS

Indoor/Outdoor


Ref. **GENERAL SERIES - RGB50/RGB140**



SPECIFICATIONS

Article No.	RGB50	RGB140
LEDs/m	50	140
LED type	5050	2835
W/m	14	3x6
Efficiency(lm/W)	>50	
Voltage	230 V AC \pm 10%	
Beam angle	120°	
Color	RGB with True White 5500K/RGB	
Power factor	>0,9	
IK	10	
IP	67	
Ambient temp	-20 - + 45 °C	
Lifetime L80 B10	30,000h	
Material	High transparent silicone	
Cutting length	500mm	
Maximum connectable length	50m	

WIRING GUIDE

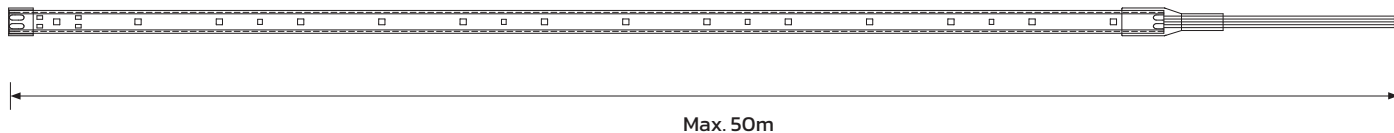

INSTALLATION METHODS



Profile




Clip & Screw



Cable ties

DIMENSIONS



PACKING INFO (RGB50/RGB140)

Reel	Size(mm)	Weight(kg)
25m	Ø220 x H105	3,5
50m	Ø220 x H215	7