
TEMPORARY LINEAR LIGHTING SOLUTIONS
Outdoor

Ref. TEMPORARY SERIES – TG / TR


IP67 IK10 230V LVD EMC CB ErP RoHS

LIGHT DISTRIBUTION

TG




TR



SPECIFICATIONS

Article No.	TG	TR
Color	Green	Red
LED type	2835	
LEDs/m	56	
Power (W/m)	14	
Voltage	220V~240V	
Power factor	>0,9	
Lifetime (L70, B10)	30,000h	
Beam angle	120°	
IP rating	67	
IK rating	10	
Ambient temp	-20°C – + 45°C	
Input cable	200mm H07RN-F with quick connector	
Output cable	200mm H07RN-F with quick connector	
Power cable	3000mm H07RN-F with quick connectors & Schuko plug	
Material	Frosted silicone glue with signal color	
Maximum length	100m	
Min. cutting length	250mm	
Min. bend diameter	d≥ 50mm	
Dimming	Trailing-edge	

WIRING GUIDE

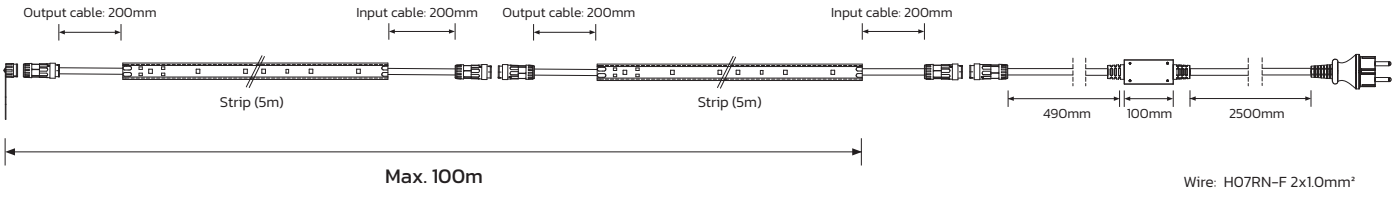

Wire: H07RN-F 2x1.0mm²


INSTALLATION METHODS


Profile


Clip & Screw


Cable ties

DIMENSIONS



PACKING INFO (TG/TR)

Reel	Size(mm)	Weight(kg)
5m	Ø220 x H105	2