TEMPORARY LINEAR LIGHTING SOLUTIONS
Outdoor

Ref. TEMPORARY SERIES - T100

IP67 IK10 LVD EMC CB ErP RoHS GLOW

OPTIONS

	Power	LEDs/m	Size	Max. Length	Working hours	Lifetime (L70,B10)	Article No.
Light Duty	14W/m	56	12X5mm	100m	<10h/day	25,000h	T100L
Heavy Duty	14W/m	112	12X5mm	100m	24h/day	35,000h	T100H


*Configuration options available upon request.

SPECIFICATIONS


Article No.	T100L	T100H
LEDs/m	56	112
Min. cutting length	250mm	125mm
Lifetime (L70, B10)	25000h	35000h
LED type	2835	
Voltage	220V~240V	
Power (W/m)	14	
Luminous Flux per Metre (Lumen/m)	1300	
Luminous Efficacy (Lumen/W)	>90	
CCT	6000K	
Power factor	>0,9	
Beam angle	120°	
CRI	>80	
IP rating	67	
IK rating	10	
Ambient temp	-20°C - + 45 °C	
Input cable	200mm H07RN-F with quick connector	
Output cable	200mm H07RN-F with quick connector	
Power cable	3000mm H07RN-F with quick connectors & Schuko plug	
Material	Frosted silicone with glow effect	
Maximum length	100m	
Min. bend diameter	d≥ 50mm	
Dimming	Trailing-edge	

LIGHT DISTRIBUTION

T100



WIRING GUIDE

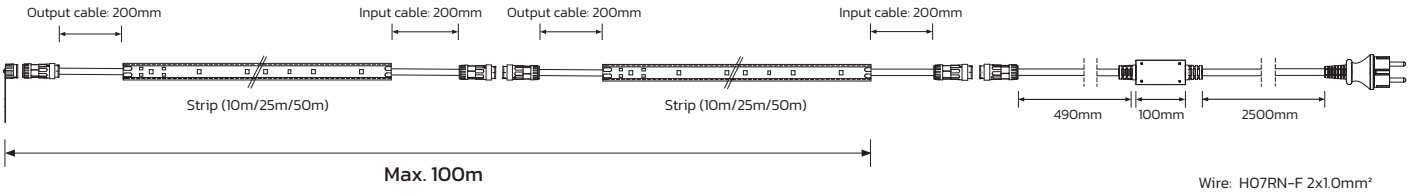

Wire: H07RN-F 2x1.0mm²


INSTALLATION METHODS


Profile


Clip & Screw


Cable ties

DIMENSIONS



PACKING INFO

Reel	Size(mm)	Weight(kg)
10m	Ø220 x H45	2
25m	Ø350 x H85	3,3
50m	Ø220 x H215	6,5