TEMPORARY LINEAR LIGHTING SOLUTIONS
Outdoor

Ref. TEMPORARY SERIES - T300/T500

IP67 IK10 230V LVD EMC CB ErP RoHS GLOW


OPTIONS

	Power	LEDs/m	Size	Cutting length	Max. Length	Working hours	Lifetime (L70,B10)	Article No.
Light Duty	3W/m	11	12X5mm	250mm	300m	<10h/day	25,000h	T300L
Heavy Duty	3W/m	22	12X5mm	125mm	300m	24h/day	35,000h	T300H
Light Duty	3W/m	11	22X5mm	250mm	500m	<10h/day	25,000h	T500L
Heavy Duty	3W/m	22	22X5mm	125mm	500m	24h/day	35 ,000h	T500H


*Configuration options available upon request.

LIGHT DISTRIBUTION

T300




T500



SPECIFICATIONS

Article No.	T300L/T300H	T500L/T500H
LEDs/m	11/22	11/22
Maximum length	300m	500m
Lifetime (L70, B10)	25000h/35000h	25000/35000h
LED type	2835	
Power (W/m)	3	
Luminous Efficacy (Lumen/W)	85	
Luminous Flux per Metre (Lumen/m)	255	
Voltage	220V~240V	
Power factor	>0,95	
Beam angle	120°	
CRI	>80	
CCT	6000K	
IP rating	67	
IK rating	10	
Ambient temp	-20°C - + 45°C	
Input cable	200mm H07RN-F with quick connector	
Output cable	200mm H07RN-F with quick connector	
Power cable	3000mm H07RN-F with quick connectors & Schuko plug	
Material	Frosted silicone with glow effect	
Min. bend diameter	d≥ 50mm	
Dimming	Trailing-edge	

WIRING GUIDE

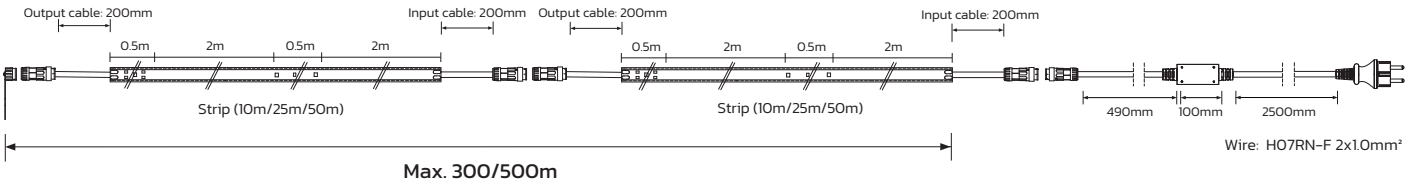

INSTALLATION METHODS



Profile


Clip & Screw



Cable ties

DIMENSIONS

T300



T500



PACKING INFO (T300)

Reel	Size(mm)	Weight(kg)
10m	Ø220 x H45	2
25m	Ø220 x H105	3,5
50m	Ø220 x H215	8

PACKING INFO (T500)

Reel	Size(mm)	Weight(kg)
25m	Ø220 x H215	8