GENERAL LINEAR LIGHTING SOLUTIONS


Indoor/Outdoor

Ref. GENERAL SERIES – CCTK120


IP65 IK08 220V~240V LVD EMC CB ErP RoHS

LIGHT DISTRIBUTION

CCTK120 2700K




CCTK120 6500K



SPECIFICATIONS

Article No.	CCTK120
LED type	2835
LEDs/m	120
Power (W/m)	2×6W
Luminous Efficacy (Lumen/W)	>100
Voltage	220V~240V
Power factor	>0,95
Beam angle	120°
CRI	>90
CCT	Tunable White
SDCM	≤ 5-step
Lifetime (L80, B10)	30,000h
IP rating	65
IK rating	08
Ambient temp	-20°C - + 45°C
Material	High transparent silicone
Double-sided adhesive	3M LSE
Maximum length	100m
Min. cutting length	100mm
Min. bend diameter	d≥ 50mm
Dimming	DMX512

WIRING GUIDE

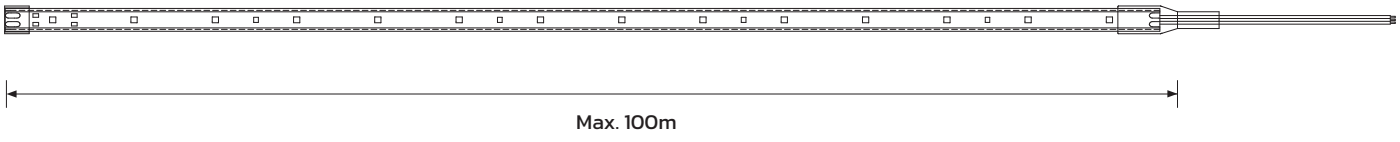

INSTALLATION METHODS



Profile




Clip & Screw



Cable ties

DIMENSIONS



PACKING INFO (CCTK120)

Reel	Size(mm)	Weight(kg)
5m	Ø220 × H45	0,65
10m	Ø220 × H45	1,3
25m	Ø220 × H105	3,3
50m	Ø220 × H215	6,6