

ELEVATOR LINEAR LIGHTING SOLUTIONS


Indoor/Outdoor

Ref. ELEVATOR SERIES - E30/E60




LIGHT DISTRIBUTION

E30





E60




SPECIFICATIONS

Article No.	E30	E60
Power (W/m)	3,2	6,4
Luminous Flux per Metre (Lumen/m)	300	600
Luminous Efficacy (Lumen/W)	90	93
Shaft Area (m²), in compliance with (EN-81)	3,5	9,2
LEDs/m	9	14
LED type	2835	
Voltage	230V	
Power factor	>0,95	
Beam angle	120°	
CRI	>80	
CCT	6000K	
Lifetime (L70, B10)	30.000h	
IP rating	65	
IK rating	08	
Ambient temp	-20°C - + 45°C	
Input cable	Open end cable/Power cable optional	
Material	Anti-glaring frosted silicone	
Maximum length	300m	
Min. cutting length	500mm	
Min. bend diameter	d≥ 50mm	
Approval	EN81-20/50	


WIRING GUIDE

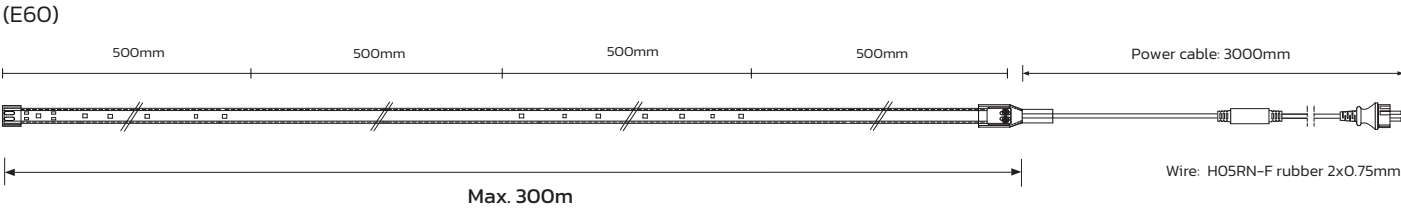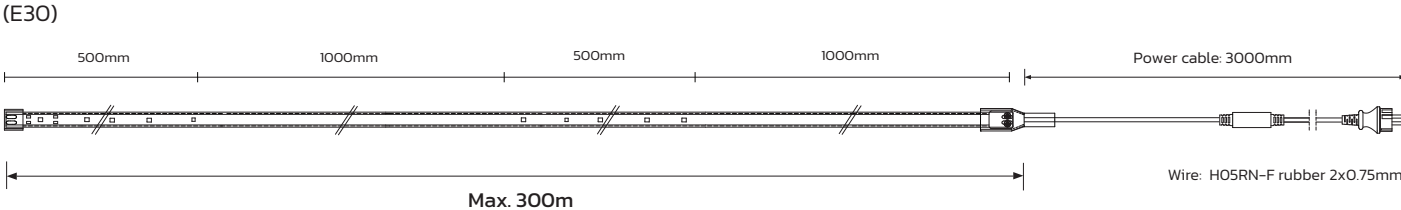

INSTALLATION METHODS



DIMENSIONS



PACKING INFO (E30/E60)

Reel	Size(mm)	Weight(kg)
300m	Ø400 x H200	16