


SUSPENDED MOUNTING CLIP + ROD

With Wires: Installation


STEP 1:

Mark the installation position of clevis on the ceiling with sufficient load-carrying capacity.

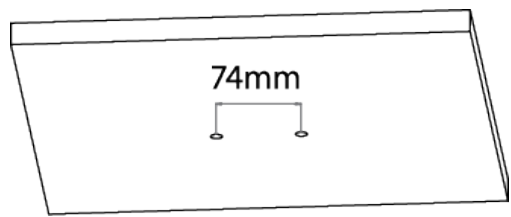


STEP 2:

Cut a cable hole along with the pre-marked notch on the lateral side of mounting flange.




STEP 3:

Assemble the mounting flange and the rods in order of 1,2 and 3.

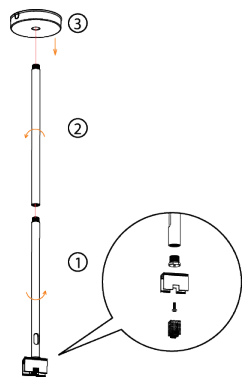


STEP 4:

Rotate and fasten them clockwise

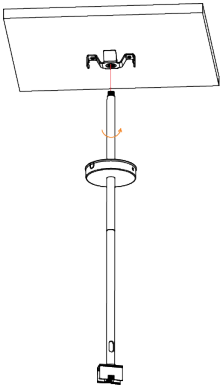


STEP 5:

Thread the cable through slotted hole to the top of rod.

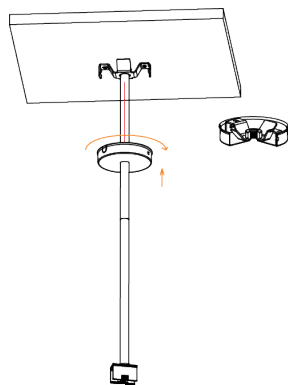

STEP 6:

Tighten the clevis by screws.

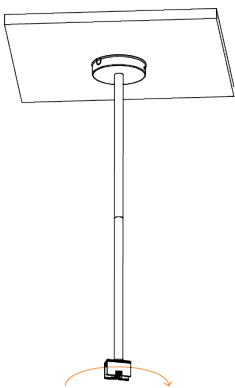


SUSPENDED MOUNTING CLIP + ROD

With Wires: Installation


STEP 7:

Adjust the clip to the angle you need (max. 180° in a clockwise direction). Then install the light to the clip and adjust the cable length.



STEP 8:

Shield the clevis by the mounting flange and rotate anticlockwise until it clicks into place.



STEP 9:

Connect the Power DC24V

