


## WAVE

### Aluminum Profile - Silicone Grip


High-quality 6063 aluminum with thin-wall, light-weight design. Includes a serrated silicone grip insert designed to hold fixture with additional force. Recommended on projects mounted upside down. It is deformation and rust resistant, and cost-effective. Please refer to install manual for proper installation practices.





#### ORDER CODE

| MOUNTING PROFILE TYPE       | STANDARD LENGTH  | PROFILE  | COLOR        |
|-----------------------------|--|----------|--------------|
| A4 = Aluminum Silicone Grip | 1 = 0.79in (20mm)<br>3 = 19.68in (500mm)<br>5 = 39.37in (1000mm)<br>6 = 78.74in (2000mm) | F = Wave | 1 = Standard |


#### DIMENSIONS



Tolerance:  $\pm 0.01$ in (0.3mm)

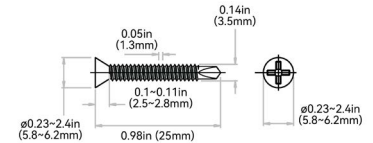

NOTES: 1. 2-L1 refers to two of symmetric L1 in each piece of profile.  
2. (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.  
"N" hereby stands for its corresponding "Hole Number" in the below table

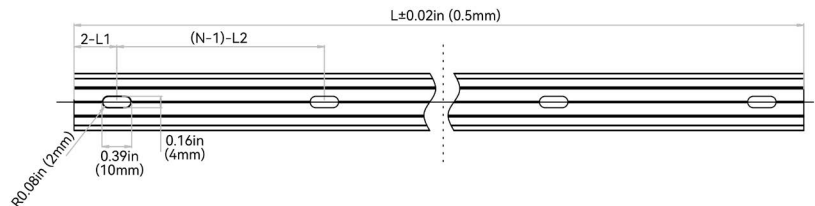

| ORDER CODE | LEGACY ORDER CODE | STANDARD LENGTH  | L1             | L2             | SLOTTED HOLE         | HOLE # |
|------------|-------------------|------------------|----------------|----------------|----------------------|--------|
| A4-1-F-1   | CL16RAL02CSE      | 0.79in (20mm)    | 0.39in (10mm)  | N/A            | 0.16*0.39in (4*10mm) | 1      |
| A4-3-F-1   | CH16RAL0M5SE      | 19.68in (500mm)  | 1.97in (50mm)  | 7.87in (200mm) | 0.16*0.39in (4*10mm) | 3      |
| A4-5-F-1   | CH16RAL01MSE      | 39.37in (1000mm) | 3.93in (100mm) | 7.87in (200mm) | 0.16*0.39in (4*10mm) | 5      |
| A4-6-F-1   | CH16RAL02MSE      | 78.74in (2000mm) | 3.93in (100mm) | 7.87in (200mm) | 0.16*0.39in (4*10mm) | 10     |