

Hydraulic cylinder mill type

Series CGM1



- Nominal pressure 160 bar
- Component series 3X

Features

- 4 types of mounting
- Piston Ø (ØAL): 25 ... 200 mm
- Piston rod Ø (ØMM): 14 ... 140 mm
- Stroke length up to 3000 mm
- Self-adjusting and adjustable end position damping

Contents

Features	1
Ordering code	2 ... 4
Technical data	5 ... 10
Overview of types of mounting	11
Dimensions	12 ... 21
Enlarged line connection	22
Flange connection	23
Subplates for valve mounting	24 ... 27
Bleeding / measuring coupling	28
Throttle valve	29
Swivel head, fork clevis, clevis bracket	30 ... 37
Trunnion mounting bearing block	38, 39
Buckling	40 ... 42
End position damping / damping capacity	43 ... 44
Selection criteria for seals	45
Components, seal kits	46, 47
Tightening torques	48
Priming / painting / Corrosivity categories	49
Project planning / maintenance instructions	50



Project planning software
Interactive Catalog System
www.boschrexroth.com/mill-type-cylinder

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
CG	M1		/		/		A	3X	/						

01	Double-acting cylinders	CG ¹⁾
02	Series	M1

Types of mounting

03	Rectangular flange at head	MF1 ²⁾
	Round flange at head	MF3
	Trunnion mounting	MT4 ³⁾
	Foot mounting	MS2
04	Piston Ø (ØAL): 25 ... 200 mm, see page 7	
05	Piston rod Ø (ØMM): 14 ... 140 mm, see page 7	
06	Stroke length in mm	


Design principle

07	Head and base flanged	A
08	Component series 30 ... 39 (30 ... 39: unchanged installation and connection dimensions)	3X


Line connection – version

09	According to ISO 1179-1 (pipe thread ISO 228-1)	B
	According to ISO 1179-1 (pipe thread ISO 228-1) with flat pipe flange	C
	According to ISO 6149-1 (metric thread ISO 261)	R
	Enlarged line connection according to ISO 1179-1 (enlarged pipe thread ISO 228-1), page 22	S ⁴⁾
	Rectangular flange connection ISO 6162, page 23	F ⁵⁾
	Square flange connection ISO 6164, page 23	H ⁶⁾
	Switching and proportional directional valves, page 26, 27	
	Subplate NG6	P ^{7; 8; 9)}
	Subplate NG10	T ^{7; 8; 10)}
	Subplate NG16	U ^{7; 8; 11)}
	Check valves type SV and SL, page 24, 25	
	Subplate NG6	A ^{7; 9; 12)}
	Subplate NG10	E ^{7; 10; 12)}
	Subplate NG20	L ^{7; 11; 12)}

Line connection – position at head

10	View to piston rod ¹³⁾ 	1
		2
		3
		4

Line connection – position at base

11	View to piston rod ¹³⁾ 	1
		2
		3
		4

Piston rod design

12	Hard chromium-plated	C
	Hardened and hard chromium-plated	H
	Non-corrosive and hard chromium-plated	L

Piston rod end

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
CG	M1		/		/		/		A	3X	/				

13	Thread (ISO6020-1) for swivel head CGKD / fork clevis CCKB	G
	Thread for swivel head CGKD / fork clevis CCKB	H ¹⁴⁾
	Piston rod end "H" with mounted swivel head CGKD	F ¹⁴⁾
	Piston rod end "G" with mounted swivel head CGKD	K
	Piston rod end "H" with mounted fork clevis CCKB	P ^{14; 15)}
	Piston rod end "G" with mounted fork clevis CCKB	R ¹⁶⁾

End position damping (see page 43, 44)

14	Without	U
	Both sides, self-adjusting	D
	Both sides, adjustable	E

Seal design (selection criteria for seals, see page 45)

15	For mineral oil HL, HLP and HFA	
	Standard seal system	M
	For mineral oil HL, HLP, HFA and water glycol HFC	
	Servo quality, reduced friction	T ⁶⁾
	Chevron seal kits	A ⁵⁾
	For HDEF phosphate ester and HFDU polyol ester	
	Servo quality, reduced friction	S ⁶⁾
	Standard seal system FKM	V

Additional options (see page 4)

16	Without	W
	With (complete type key on page 4)	Z

Order example:

CGM1MT4/50/28/550A3X/B11CGDMW XV = 175 mm

CGM1MF3/200/140/950A3X/B11CHDAW

- ¹⁾ Not standardized
- ²⁾ Piston Ø 25 ... 125 mm
- ³⁾ Always indicate dimension "XV" in the plain text with orders
- ⁴⁾ Piston Ø 63 ... 200 mm
- ⁵⁾ Piston Ø 50 ... 200 mm
- ⁶⁾ Piston Ø 40 ... 200 mm
- ⁷⁾ Subplates only with pipe thread (ISO1179-1)
- ⁸⁾ Only up to stroke 900 mm
- ⁹⁾ Piston Ø 40 ... 80 mm, only position "1", "1" (head / base)

- ¹⁰⁾ Piston Ø 63 ... 200 mm, only position "1", "1" (head / base)
- ¹¹⁾ Piston Ø 125 ... 200 mm, only position "1", "1" (head / base)
- ¹²⁾ Subplates for check valves of type SV and SL
Please note: Seal designs "T" and "S" are not designed for the static holding function.
- ¹³⁾ All graphical pictures in the data sheet show position "1"
- ¹⁴⁾ Per piston Ø only possible with large piston rod Ø
- ¹⁵⁾ Piston Ø 200 mm, on request
- ¹⁶⁾ Piston rod Ø 14 ... 90 mm

Ordering code

[] I z []

01

02

03

04

05

06

07

08

01	Without	W
	Inductive proximity switches without mating connector - separate order, see page 10	E 1); 2)
02	Standard with guide rings	W 3)
03	Without measuring coupling	W
	Measuring coupling, on both sides	A
	Measuring coupling, on both sides, stainless steel version	E 4)
04	Standard conical grease nipples, DIN 71412 form A	W
	Flat type grease nipples, DIN 3404 form A	B 5)
05	Without piston rod extension	W
	Specify the piston rod extension dimension "LY" in the plain text in mm	Y
06	Priming class CP3	W
	Painting class CP4	B 6)
	Painting class CP5	L 6)
	Painting class CP6	U 6)
	Painting class CP7	E 6)
07	Without oil filling	W
	With corrosion protection oil VG68	F
08	Without test certificate	W
	With certificate of compliance 2.1 based on EN 10204	B
	With acceptance test certificate 3.1 based on EN 10204	C

1) Minimum stroke length 20 mm

2) Piston Ø 40 ... 200 mm

3) For Ø 25 and Ø 32 without guide rings

4) On request

5) As of piston Ø 50 ... 200 mm
Not for piston rod end "P" and "R"

6) Specify RAL color in plain text

Technical data

(For applications outside these values, please consult us!)

General		
Installation position	Any	
Ambient temperature range	See page 45	
Priming	See page 49	
Painting	See page 49	
Hydraulic		
Nominal pressure ¹⁾	bar	160
Minimum operating pressure ²⁾ (without load)	bar	10
Static test pressure	bar	240
Hydraulic fluid	See table below	
Hydraulic fluid temperature range	°C	See page 45
Viscosity range	mm²/s	12 ... 380
Viscosity at operating temperature (recommended)	mm²/s	20 ... 100
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)	Class 20/18/15	
Bleeding	Secured against screwing out from piston Ø 40 mm by default	
Hydraulic fluid		
Hydraulic fluid	Classification	Data sheet
Mineral oils	HL, HLP	90220
Phosphate ester	HFDR	90222
Polyol ester	HF DU	90222
Oil-in-water emulsion	HFA	90223
Water glycol	HFC	90223

- ¹⁾ Higher operating pressures up to 200 bar on request
With extreme shock loads, mounting elements and threaded piston rod connections must be designed for durability.
- ²⁾ Depending on the application, a certain minimum pressure is required in order to guarantee good functioning of the hydraulic cylinder. Without load, a minimum pressure of 10 bar is recommended for differential cylinders; for lower pressures, please contact us.

Technical data
(For applications outside these values, please consult us!)

Stroke velocity

Please observe the guideline on maximum stroke velocities (with recommended flow velocity of 5 m/s in the line connection) in the table. Higher stroke velocity on request. If the extension velocity is considerably higher than the retraction velocity of the piston rod, drag-out losses of the hydraulic fluid may result. If necessary, please consult us.

Piston Ø (mm)	Line connection	max. stroke velocity in m/s
25	G1/4	0.29
32	G3/8	0.40
40	G1/2	0.61
50	G1/2	0.39
63	G3/4	0.41
80	G3/4	0.25
100	G1	0.20
125	G1	0.13
160	G1 1/4	0.12
200	G1 1/4	0.08

Information on stroke length and stroke velocity

ØAL in mm		25	32	40	50	63	80	100	125	160	200
Minimum stroke in mm (recommended)	► Without damping	–	–	–	–	–	–	–	–	–	–
	► With damping	30	38	46	44	54	54	64	66	80	92
Maximum Velocity in m/s (recommended)	► Seal design "M"; ► 160 bar	0.50				0.40		0.30		0.25	
	► Seal design "M"; ► 100 bar	0.70				0.60		0.40		0.35	
	► Seal design "T", "S"; 160 bar	1.00				0.80		0.60		0.50	
Minimum velocity in mm/s (recommended)	► Seal design "M"	30									
	► Seal design "T", "S"	1									

Technical data


(For applications outside these values, please consult us!)

Areas, forces, flow

Piston	Piston rod	Area ratio	Areas			Force at 160 bar ¹⁾			Flow at 0.1 m/s ²⁾			max. stroke length in mm
			Piston A_1 in cm ²	Rod A_2 in cm ²	Ring A_3 in cm ²	Pressure F_1 kN	Diff. F_2 kN	Pulling F_3 kN	OFF q_{v1} l/min	Diff. q_{v2} l/min	ON q_{v3} l/min	
25	14	1.46	4.91	1.54	3.37	7.85	2.44	5.37	2.9	0.9	2.0	600
	18	2.08		2.54	2.36		4.07	3.76		1.5	1.4	
32	18	1.46	8.04	2.54	5.50	12.80	4.07	8.76	4.8	1.5	3.3	800
	22	1.90		3.80	4.24		6.08	6.76		2.3	2.5	
40	22	1.43	12.56	3.80	8.76	20.00	6.08	14.03	7.5	2.3	5.2	2000
	28	1.96		6.16	6.41		9.82	10.24		3.7	3.8	
50	28	1.46	19.63	6.16	13.47	31.30	9.82	21.55	11.8	3.7	8.1	2000
	36	2.08		10.18	9.46		16.29	15.10		6.1	5.6	
63	36	1.48	31.17	10.18	20.99	49.80	16.29	33.56	18.7	6.1	12.6	2000
	45	2.04		15.90	15.27		25.40	24.41		9.5	9.2	
80	45	1.46	50.26	15.90	34.36	80.30	25.40	54.96	30.2	9.5	20.7	2000
	56	1.96		24.63	25.63		39.30	40.99		14.8	15.4	
100	56	1.46	78.54	24.63	53.91	125.00	39.30	86.22	47.1	14.8	32.3	3000
	70	1.96		38.48	40.06		61.50	64.04		23.1	24.0	
125	70	1.46	122.72	38.48	84.24	196.00	61.50	134.7	73.6	23.1	50.5	3000
	90	2.08		63.62	59.10		101.00	94.49		38.2	35.4	
160	90	1.46	201.06	63.62	137.44	321.00	101.00	219.8	120.6	38.2	82.4	3000
	110	1.90		95.06	106.00		151.00	169.5		57.0	63.6	
200	110	1.43	314.16	95.06	219.09	502.60	152.00	350.6	188.5	57.0	131.5	3000
	140	1.96		153.96	160.20		246.30	256.3		92.4	96.1	

- 1) Theoretical static cylinder force
(without consideration of the efficiency and admissible load for attachment parts such as swivel heads, plates, or valves, etc.)

- 2) Stroke velocity

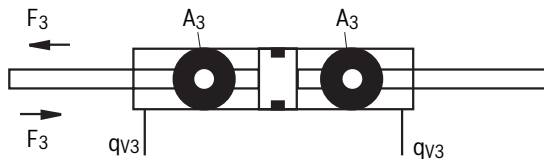

Technical data

(For applications outside these values, please consult us!)

Tolerances according to ISO 6020-1

Installation dimensions	WF	W	WC	XS	XV	Y	PJ	Stroke tolerances in mm
Stroke length in mm	Tolerances in mm							
≤ 1250	± 2	± 2	± 2	± 2	± 2	± 2	± 1.5	+ 2
> 1250 ... ≤ 3000	± 4	± 4	± 4	± 4	± 4	± 4	± 3	+ 5

Technical data

(For applications outside these values, please consult us!)

Hydraulic cylinder mass (in kg)


Piston ØAL in mm	Piston rod ØMM in mm	at 0 mm stroke length				per 100 mm stroke length in kg
		"MF1" in kg	"MF3" in kg	"MT4" in kg	"MS2" in kg	
25	14	3.0	3.1	3.0	3.6	0.6
	18	3.0	3.1	3.0	3.6	0.8
32	18	4.3	4.5	4.2	5.2	0.9
	22	4.3	4.5	4.2	5.2	1.1
40	22	7.1	7.5	7.3	8.4	1.2
	28	7.1	7.5	7.3	8.4	1.5
50	28	11.0	11.5	11.1	13.3	1.7
	36	11.0	11.5	11.1	13.3	2.3
63	36	18.5	19.0	18.5	22.0	2.9
	45	18.5	19.0	18.5	22.0	3.8
80	45	27.0	28.0	27.0	32.0	4.1
	56	27.0	28.0	27.0	32.0	5.5
100	56	48.0	50.0	49.0	57.5	7.4
	70	50.0	52.0	51.0	59.5	9.5
125	70	78.0	80.0	83.0	96.0	10.3
	90	81.0	83.0	86.0	99.0	14.2
160	90	–	143.0	158.0	170.0	16.5
	110	–	145.0	160.0	172.0	21.4
200	110	–	267.0	295.0	309.0	22.9
	140	–	273.0	301.0	315.0	32.1

Technical data: Proximity switch
(For applications outside these values, please consult us!)

Inductive proximity switches are used as reliable end position control for hydraulic cylinders. They are an important element for the safe and exact monitoring of safety equipment, lockings and/or other machine functions in their end position by means of the output of signals. The proximity switch which is high-pressure-resistant up to 500 bar works in a contactless manner. Consequently, it is wear-free. The proximity switch has been set at the factory. The switching distance must not be adjusted. The lock nut of the proximity switch is marked at the factory using sealing wax. On versions with proximity switch, the hydraulic cylinders are provided with proximity switches on both sides.

General			
Function type		PNP normally open contact	
Admissible pressure	bar	500	
Operating voltage	V DC	10 ... 30	
	► Including residual ripple	%	≤ 15
Voltage drop	V	≤ 1.5	
Rated operating voltage	V DC	24	
Rated operating current	mA	200	
Idle current	mA	≤ 8	
Residual current	µA	≤ 10	
Repetition accuracy	%	≤ 5	
Hysteresis	%	≤ 15	
Ambient temperature range	°C	-25 ... +80	
Temperature drift	%	≤ 10	
Switching frequency	Hz	1000	
Protection class	► Active area	IP	68 according to DIN 40050
	► Proximity switch	IP	67 according to DIN 40050
Housing material		Material no. 1.4104	

Pin assignment

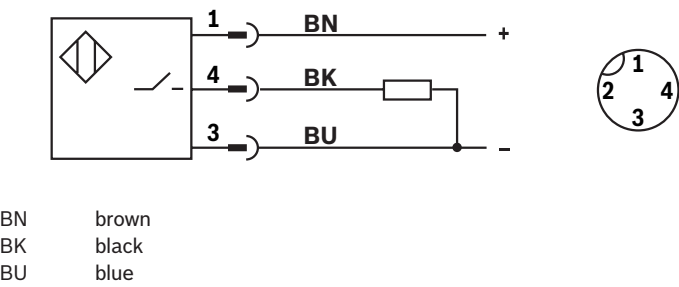

Overview of types of mounting

"MF1" (see page 12, 13)



"MT4" (see page 14, 15)



"MF3" (see page 15, 16)




"MS2" (see page 17, 18)




Dimensions: "MF1"
(dimensions in mm)

"MF1"

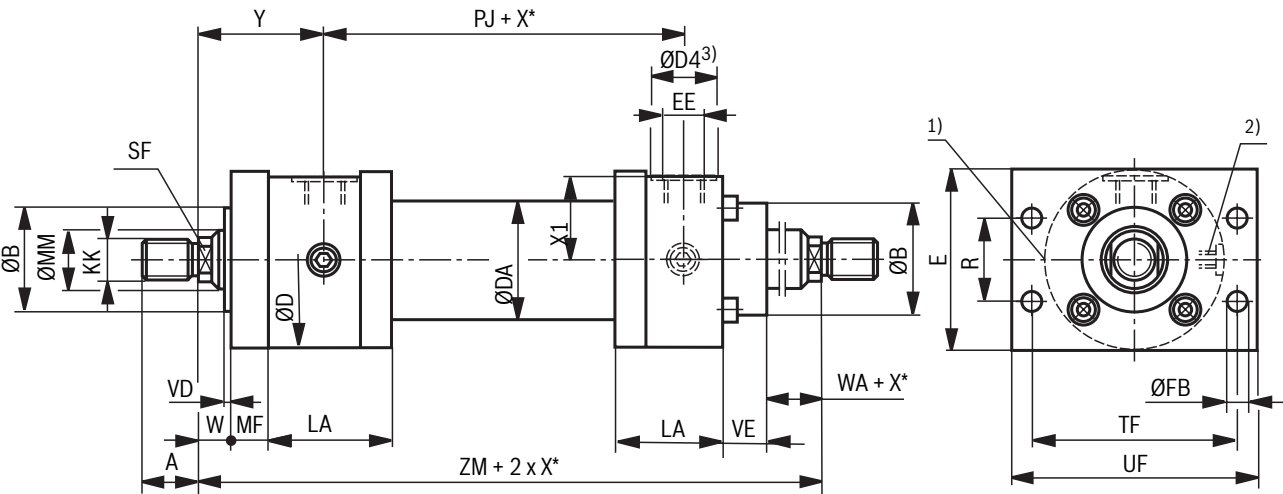

MF1..2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

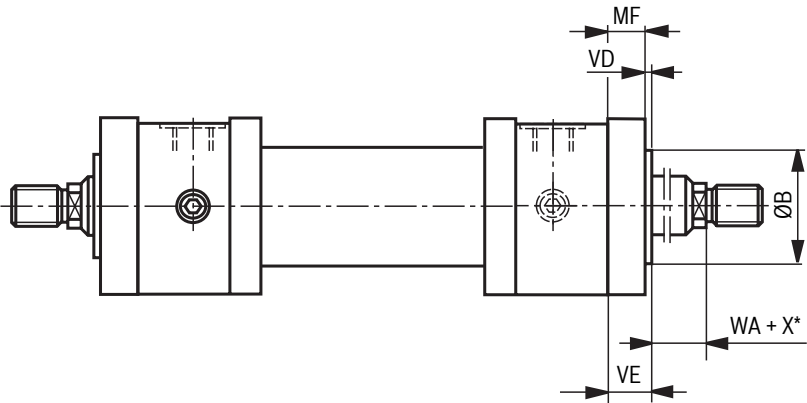

Dimensions: "MF1"
 (dimensions in mm)

ØAL	ØMM	KK ⁴⁾	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB	ØD	ØDA	ØD4	EE	ØD4	EE	Y	PJ	X1
		ISO 6020-1					f8			3; 8)	8)	3; 6)	6)	8)	8)	
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77	26
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117	54.5
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134	62.5
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162	75.5
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174	92.5

ØAL	ØMM	VE	WA	MF	VA	VD	W	ZM	E	R	TF	UF	ØFB	LA
				js13		min.	8)		max.	js13	js13	max.	H13	
25	14 18	15	13	12	3	3	16	193	60	28.7	69.2	85	6.6	58
32	18 22	19	13	16	3	3	16	217	70	35.2	85	105	9	62
40	22 28	19	13	16	3	3	16	239	80	40.6	98	115	9	73
50	28 36	24	14	20	4	4	18	255	100	48.2	116.4	140	11	74
63	36 45	29	16	25	4	4	20	281	120	55.5	134	160	13.5	84
80	45 56	36	18	32	4	4	22	316	135	63.1	152.5	185	17.5	93
100	56 70	37	20	32	5	5	25	378	160	76.5	184.8	225	22	117
125	70 90	37	23	32	5	5	28	416	195	90.2	217.1	255	22	143

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

 1) Throttle valve only with end position damping "E"
 (180° for bleeding)

 2) Bleeding: With view to the piston rod, the position is offset by 90° in
 relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"


6) Line connection "B"

7) Line connection "R"


8) Tolerances according to ISO 6020-1, see page 8

Dimensions: "MF3"
(dimensions in mm)

"MF3"

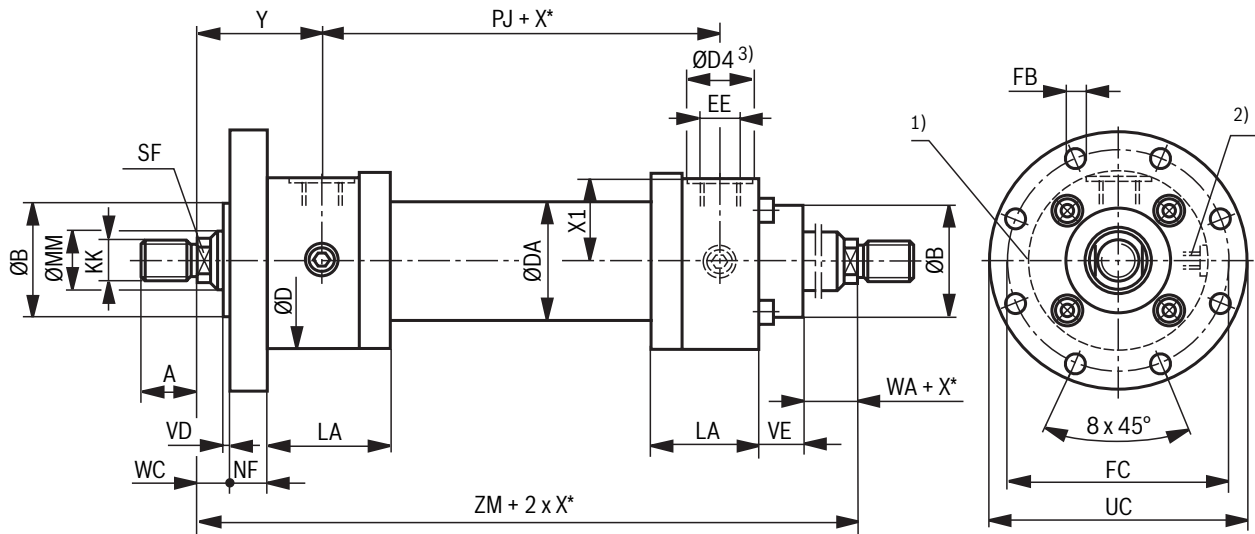

MF3..2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

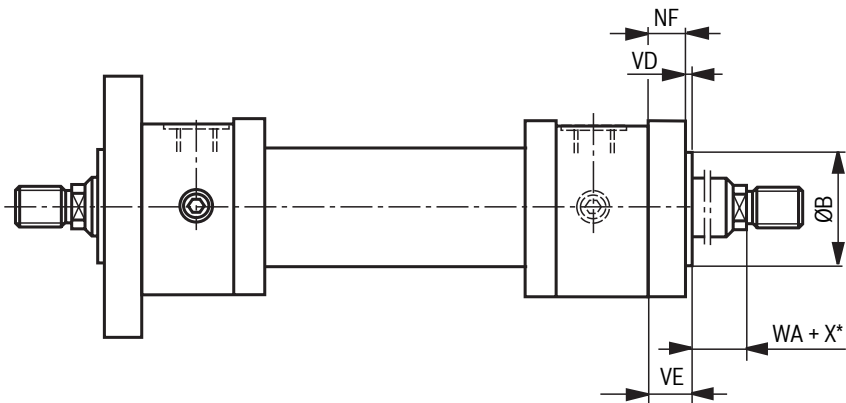

Dimensions: "MF3" (dimensions in mm)

ØAL	ØMM	KK ⁴⁾	A ⁴⁾	KK ⁵⁾	A ⁵⁾	SF	ØB	ØD	ØDA	ØD4	EE	ØD4	EE	Y	PJ
		ISO 6020-1					f8			3; 6)	6)	3; 7)	7)	8)	8)
25	14 18	M12 x 1.25 M14 x 1.5	16 18	— M12 x 1.25	— 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77
32	18 22	M14 x 1.5 M16 x 1.5	18 22	— M14 x 1.5	— 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89
40	22 28	M16 x 1.5 M20 x 1.5	22 28	— M16 x 1.5	— 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97
50	28 36	M20 x 1.5 M27 x 2	28 36	— M20 x 1.5	— 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111
63	36 45	M27 x 2 M33 x 2	36 45	— M27 x 2	— 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117
80	45 56	M33 x 2 M42 x 2	45 56	— M33 x 2	— 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134
100	56 70	M42 x 2 M48 x 2	56 63	— M42 x 2	— 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162
125	70 90	M48 x 2 M64 x 3	63 85	— M48 x 2	— 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174
160	90 110	M64 x 3 M80 x 3	85 95	— M64 x 3	— 85	75 95	160	237	190	58	G1 1/4	52	M42 x 2	143	191
200	110 140	M80 x 3 M100 x 3	95 112	— M80 x 3	— 95	95 120	200	285	230	58	G1 1/4	52	M42 x 2	190	224

ØAL	ØMM	X1	VE	WA	NF js13	VA	VD	WC 8)	ZM	ØFC js13	ØUC max.	ØFB H13	LA
25	14 18	26	15	13	12	3	3	16	193	75	90	6.6	58
32	18 22	30.5	19	13	16	3	3	16	217	92	110	9	62
40	22 28	35.5	19	13	16	3	3	16	239	106	125	9	73
50	28 36	44.5	24	14	20	4	4	18	255	126	150	11	74
63	36 45	54.5	29	16	25	4	4	20	281	145	170	13.5	84
80	45 56	62.5	36	18	32	4	4	22	316	165	195	17.5	93
100	56 70	75.5	37	20	32	5	5	25	378	200	240	22	117
125	70 90	92.5	37	23	32	5	5	28	416	235	275	22	143
160	90 110	115.5	41	25	36	8	5	30	477	280	320	22	171
200	110 140	138.5	45	30	40	15	5	35	604	340	385	26	230

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Thread for piston rod end "G", "K" and "R"

5) Thread for piston rod end "H", "F" and "P"


6) Line connection "B"

7) Line connection "R"


8) Tolerances according to ISO 6020-1, see page 8

Dimensions: "MT4"
(dimensions in mm)

"MT4"

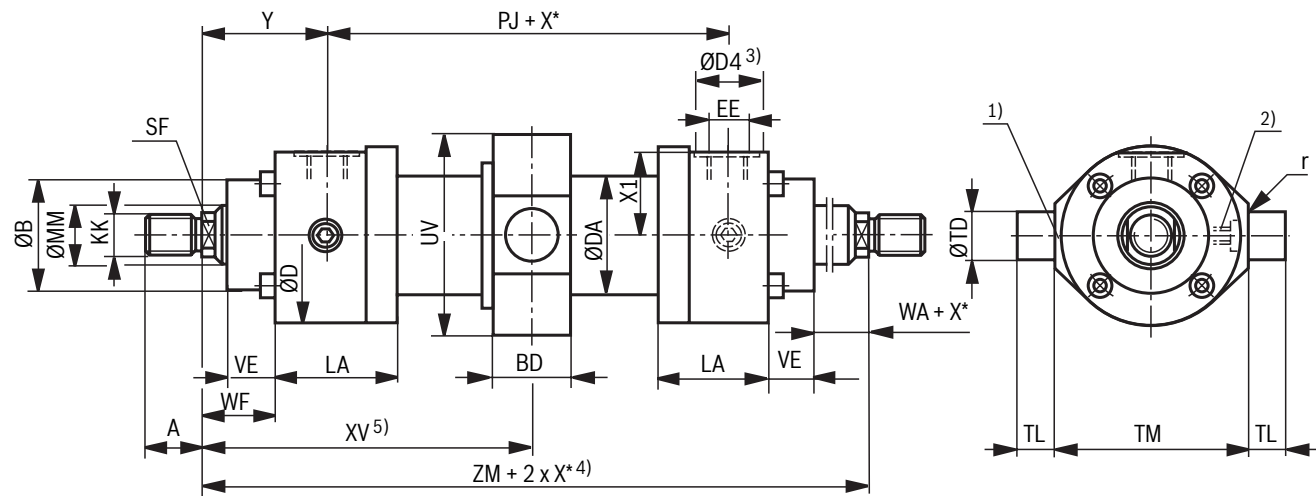

MT4..2X/...A: as chevron seal version and AL-Ø 50 ... 200 mm

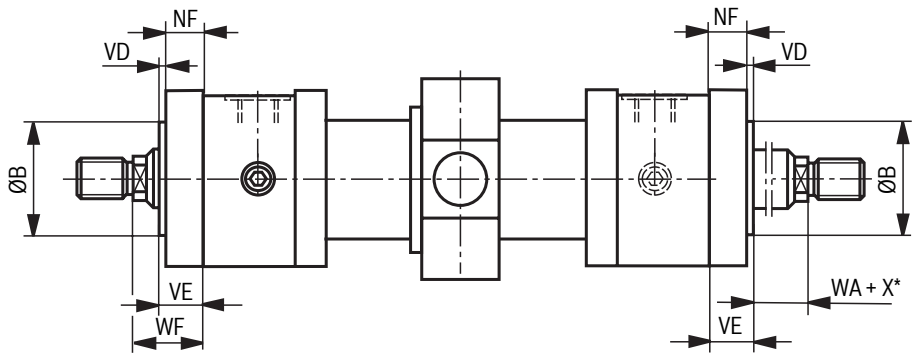

Dimensions: "MT4" (dimensions in mm)

AL Ø	MM Ø	KK ⁶⁾ ISO 6020-1	A ⁶⁾	KK ⁷⁾	A ⁷⁾	SF	ØB	ØD	ØDA	ØD4 3); 8)	EE 8)	ØD4 3); 9)	EE 9)	Y 11)	PJ 11)	X1	VE
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	32	56	35	25	G1/4	21	M14 x 1.5	58	77	26	15
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	40	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5	19
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	50	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5	19
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	60	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5	24
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	70	116	78	42	G3/4	34	M27 x 2	82	117	54.5	29
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	85	130	95	42	G3/4	34	M27 x 2	91	134	62.5	36
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	106	158	120	47	G1	43	M33 x 2	108	162	75.5	37
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	132	192	150	47	G1	43	M33 x 2	121	174	92.5	37
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	160	237	190	58	G1 1/4	52	M42 x 2	143	191	115.5	41
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	200	285	230	58	G1 1/4	52	M42 x 2	190	224	138.5	45

AL Ø	MM Ø	WF	WA	NF	VA	VD	ZM	BD	UV 10)	r	ØTD f8	TL js13	TM h12	XV ^{5); 11)} min.	XV ^{5); 11)} max.	X* ⁴⁾ min.	LA
25	14 18	28	13	–	3	–	193	19	58	0.8	12	10	63	107.5	93.5+X*	22	58
32	18 22	32	13	–	3	–	217	24	67	0.8	16	12	75	118	107+X*	19	62
40	22 28	32	13	–	3	–	239	28	78	1	20	16	90	131	116+X*	23	73
50	28 36	38	14	20	4	4	255	33	95	1	25	20	105	141.5	122.5+X*	28	74
63	36 45	45	16	25	4	4	281	38	116	1.5	32	25	120	164	129+X*	47	84
80	45 56	54	18	32	4	4	316	53	130	2	40	32	135	189.5	138.5+X*	63	93
100	56 70	57	20	32	5	5	378	68	158	2	50	40	160	224	166+X*	70	117
125	70 90	60	23	32	5	5	416	78	210	2.5	63	50	195	261	170+X*	106	143
160	90 110	66	25	36	8	5	477	118	250	3	80	63	240	320	157+X*	163	171
200	110 140	75	30	40	15	5	604	148	300	3	100	80	295	403	201+X*	202	230

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Minimum stroke length "X*_{min}."

5) When ordering, always specify the "XV" dimension in the plain text (observe XV_{min} and XV_{max})

6) Thread for piston rod end "G", "K" and "R"

7) Thread for piston rod end "H", "F" and "P"

8) Line connection "B"

9) Line connection "R"


10) Tolerance according to EN ISO9013: Thermal cutting

11) Tolerances according to ISO 6020-1, see page 8

Dimensions: "MS2"

(dimensions in mm)

"MS2"

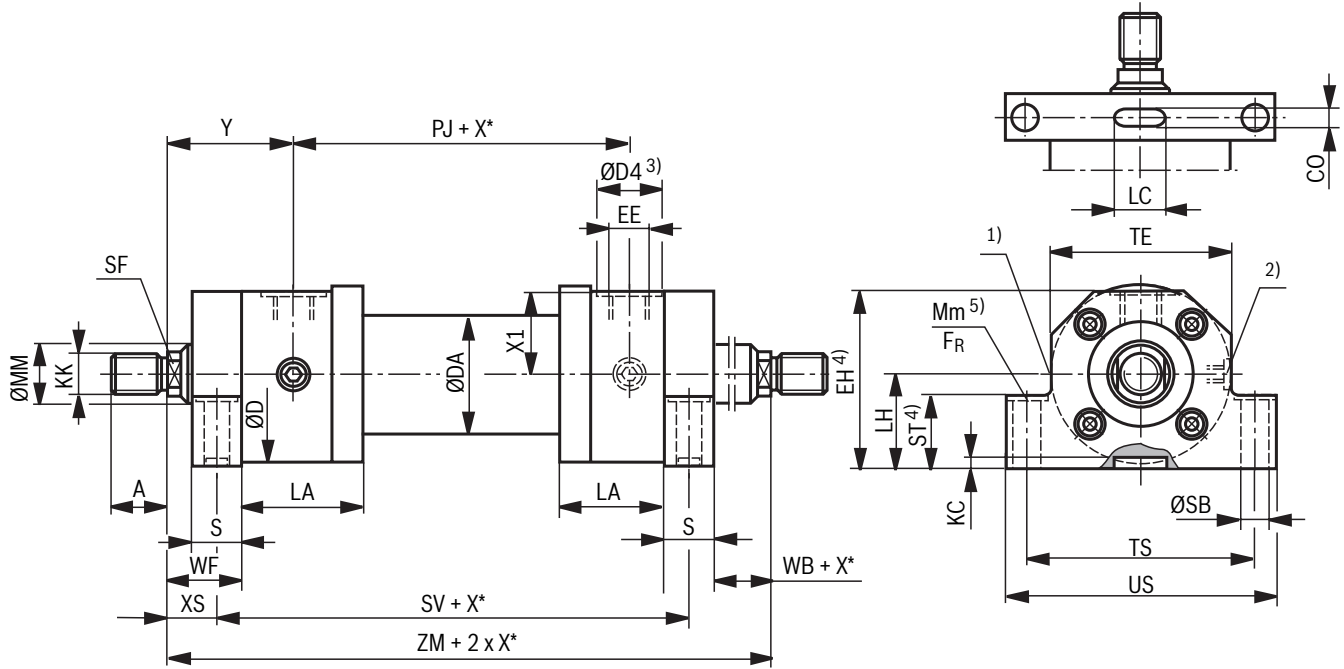

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

1) Throttle valve only with end position damping "E"
(180° for bleeding)

2) Bleeding: With view to the piston rod, the position is offset by 90° in relation to the line connection (clockwise)

3) ØD4 recess maximum 0.5 mm deep

4) Specified dimensions are smaller than the max. dimensions in ISO 6020-1

5) Recess maximum 2 mm deep, for hexagon socket head cap screw according to ISO 4762

The mounting screws must not be subjected to shear force.

The mounting screws according to ISO 4762 (property class 10.9) are to be tightened applying the specified tightening torque M_m .

If the calculated frictional force F_R is lower than the maximum cylinder force, a fitting key has to be inserted at the head.

Calculation principle:


- ▶ The specified frictional force F_R refers to a friction factor of 0.2 (steel/steel)
 - ▶ Head-side foot as fixed bearing
 - ▶ Base side foot as loose bearing
- 6) Thread for piston rod end "G", "K" and "R"
- 7) Thread for piston rod end "H", "F" and "P"
- 8) Line connection "B"
- 9) Line connection "R"
- 10) Tolerances according to ISO 6020-1, see page 8

Dimensions: "MS2"
(dimensions in mm)



AL Ø	MM Ø	KK ⁶⁾ ISO 6020-1	A ⁶⁾	KK ⁷⁾	A ⁷⁾	SF	ØD	ØDA	ØD4 3; 8)	EE 8)	ØD4 3; 9)	EE 9)	Y 10)	PJ 10)	X1	WF 10)	WB
25	14 18	M12 x 1.25 M14 x 1.5	16 18	– M12 x 1.25	– 16	12 14	56	35	25	G1/4	21	M14 x 1.5	58	77	26	28	8
32	18 22	M14 x 1.5 M16 x 1.5	18 22	– M14 x 1.5	– 18	14 18	67	42	28	G3/8	26	M18 x 1.5	64	89	30.5	32	7
40	22 28	M16 x 1.5 M20 x 1.5	22 28	– M16 x 1.5	– 22	18 22	78	50	34	G1/2	29	M22 x 1.5	71	97	35.5	32	7
50	28 36	M20 x 1.5 M27 x 2	28 36	– M20 x 1.5	– 28	22 30	95	60	34	G1/2	29	M22 x 1.5	72	111	44.5	38	6
63	36 45	M27 x 2 M33 x 2	36 45	– M27 x 2	– 36	30 36	116	78	42	G3/4	34	M27 x 2	82	117	54.5	45	13
80	45 56	M33 x 2 M42 x 2	45 56	– M33 x 2	– 45	36 46	130	95	42	G3/4	34	M27 x 2	91	134	62.5	54	14
100	56 70	M42 x 2 M48 x 2	56 63	– M42 x 2	– 56	46 60	158	120	47	G1	43	M33 x 2	108	162	75.5	57	7
125	70 90	M48 x 2 M64 x 3	63 85	– M48 x 2	– 63	60 75	192	150	47	G1	43	M33 x 2	121	174	92.5	60	4
160	90 110	M64 x 3 M80 x 3	85 95	– M64 x 3	– 85	75 95	237	190	58	G1 1/4	52	M42 x 2	143	191	115.5	66	6
200	110 140	M80 x 3 M100 x 3	95 112	– M80 x 3	– 95	95 120	285	230	58	G1 1/4	52	M42 x 2	190	224	138.5	75	3

AL Ø	MM Ø	XS 10)	SV	CO N9	LC ⁴⁾ +0.5	ZM	KC min.	EH ⁴⁾ –1	LH h10	S js13	ØSB H13	ST 4)	TE js13	TS js13	US max.	LA	FR ⁵⁾ kN	Mm ⁵⁾ Nm
25	14 18	18	157	6	25	193	3.5	57	32	20	9	24	56	75	92	58	4.90	30
32	18 22	19.5	178	8	36	217	4	67	38	25	11	32	67	90	110	62	7.90	60
40	22 28	19.5	200	8	36	239	4	77.5	43	25	11	32	78	100	120	73	7.90	60
50	28 36	22	211	10	40	255	4.5	95	52	32	14	42	95	120	145	74	11.10	100
63	36 45	29	223	10	40	281	4.5	113	62	32	18	50	116	150	180	84	21.15	250
80	45 56	34	248	14	63	316	5	129	70	40	22	60	130	170	210	93	33.35	490
100	56 70	32	314	16	70	378	6	153	82	50	26	70	158	205	250	117	48.30	850
125	70 90	32	352	18	80	416	6	190	100	56	33	80	192	245	300	143	77.80	1710
160	90 110	36	405	22	125	477	8	232	119	60	33	90	238	295	350	171	77.80	1710
200	110 140	39	526	28	160	604	9	282	145	72	39	110	285	350	415	230	113.25	2970

Dimensions: Proximity switch
(dimensions in mm)

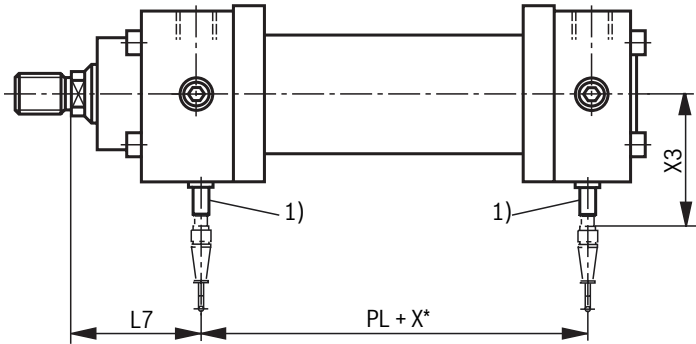


Installation space for mating connector

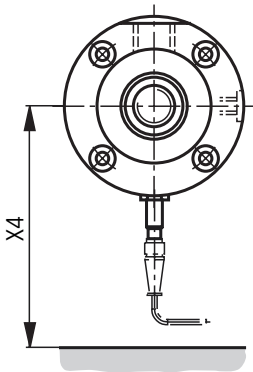

Mating connector with 5 m cable
Material no. **R913016852**
(separate order)



Mating connector, angled with 5 m cable
(position of the cable outlet cannot be defined)
Material no. **R988064311**
(separate order)



Dimensions: Proximity switch
(dimensions in mm)

ØAL	ØMM	PL	L7	X3	X4	X5
25 ²⁾	14 18	–	–	–	–	–
32 ²⁾	18 22	–	–	–	–	–
40	22 28	97	71	94	170	125
50	28 36	103	76	98	175	130
63	36 45	113	84	103	180	135
80	45 56	124	96	109	185	140
100	56 70	150	114	116	195	150
125	70 90	158	129	126	205	160
160	90 110	181	148	136	215	170
200	110 140	214	195	151	230	185

ØAL = piston Ø

ØMM = piston rod Ø

X* = stroke length

¹⁾ The proximity switch is always located opposite of the line connection


²⁾ Piston Ø 25 ... 32 mm
Proximity switch not possible



Notice:

For cylinder dimensions, see page 12 ... 19

Enlarged line connection
(dimensions in mm)

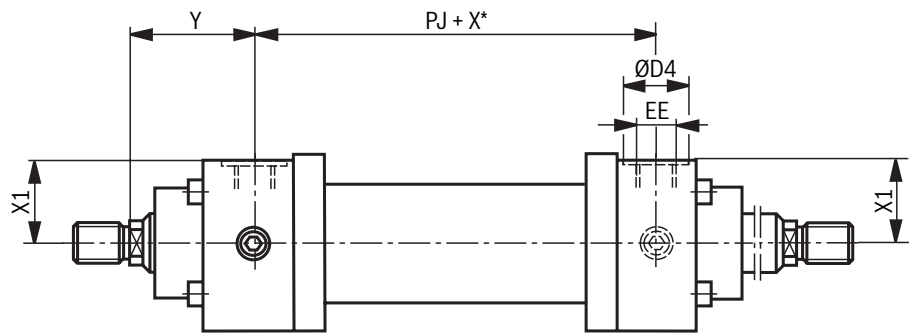


ØAL	Version "S" ISO 1179-1				
	EE	ØD4 ¹⁾	Y	PJ	X1
25	–	–	–	–	–
32	–	–	–	–	–
40	–	–	–	–	–
50	–	–	–	–	–
63	G1	47	80	121	53.5
80	G1	47	91	134	60.5
100	G1 1/4	58	108	162	74
125	G1 1/4	58	121	174	92
160	G1 1/2	65	143	191	114.5
200	G1 1/2	65	190	224	138.5


ØAL = piston Ø
 ØMM = piston rod Ø
 X* = stroke length
 1) ØD4 recess maximum 0.5 mm deep

Notice:
 For cylinder dimensions, see page 12 ... 19


Flange connection (dimensions in mm)

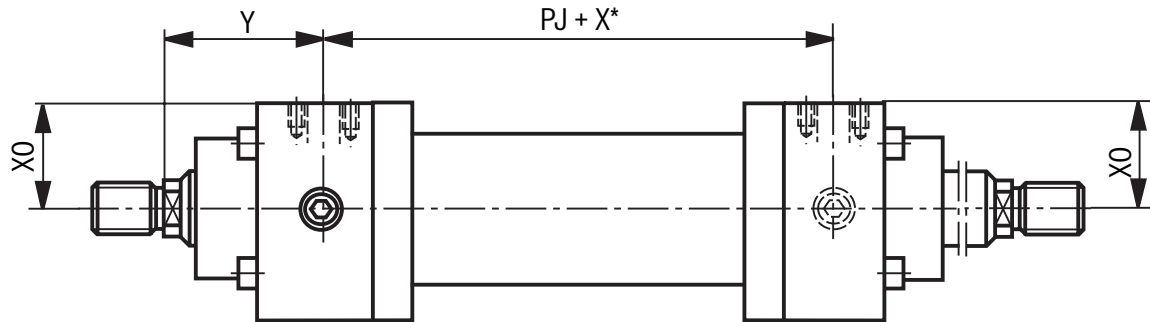

Dimensions for rectangular flange according to ISO 6162-1 (≅SAE 3000 PSI)

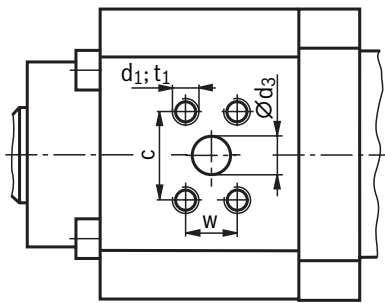

Dimensions for square flange according to ISO 6164

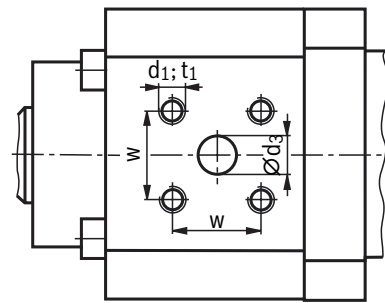

ØAL	Version "F" ISO 6162-1 (≅SAE 3000 PSI) ¹⁾									Version "H" ISO 6164						
	Y	PJ	X0	Ød ₃	Ød ₃ ¹⁾	c ±0.25	w ±0.25	d ₁	t ₁ ²⁾	Y	PJ	X0	Ød ₃	w ±0.25	d ₁	t ₁ ²⁾
25	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
40	–	–	–	–	–	–	–	–	–	71	97	34.5	10	24.7	M6	13
50	72	111	41	13	1/2"	38.1	17.5	M8	14	72	111	44	10	24.7	M6	13
63	82	117	52	13	1/2"	38.1	17.5	M8	16	82	117	52	13	29.7	M8	16
80	91	134	60	13	1/2"	38.1	17.5	M8	16	91	134	60	13	29.7	M8	16
100	108	162	72	19	3/4"	47.6	22.3	M10	20	108	162	72	19	35.4	M8	16
125	121	174	91	19	3/4"	47.6	22.3	M10	20	121	174	91	19	35.4	M8	16
160	143	191	114	25	1"	52.4	26.2	M10	20	143	191	114	25	43.8	M10	20
200	190	224	138	25	1"	52.4	26.2	M10	20	190	224	138	25	43.8	M10	20

ØAL = piston Ø

X* = stroke length

¹⁾ Flange connection according to ISO 6162-1 corresponds to flange connection according to SAE 3000 PSI

²⁾ Thread depth




Notice:

For cylinder dimensions, see page 12 ... 19


Subplates for valve mounting (check valves type SV and SL) (dimensions in mm)

Installation situation with MT4

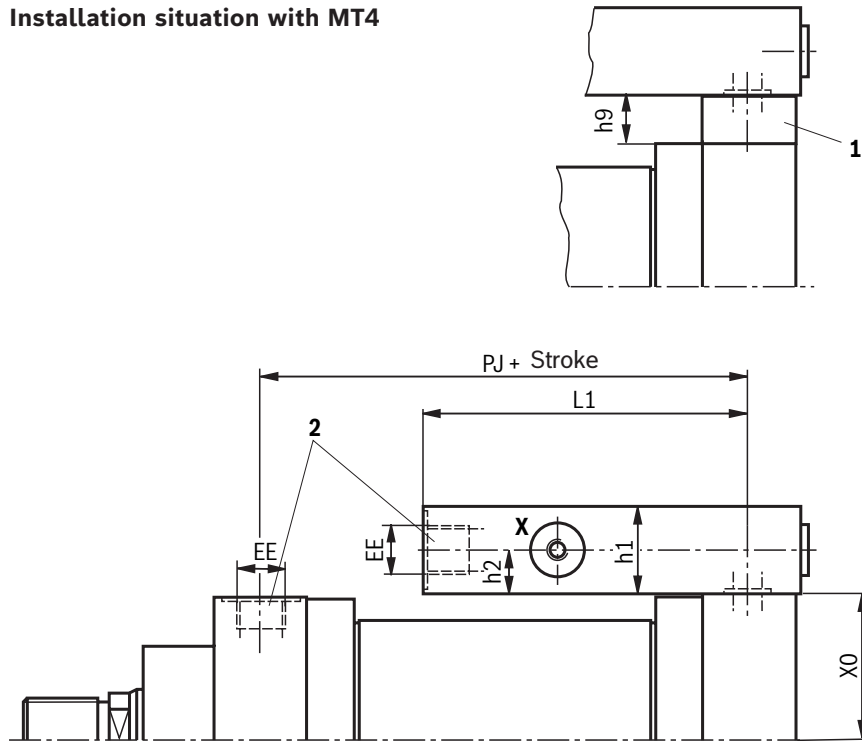


NG6

Porting pattern according to ISO 4401

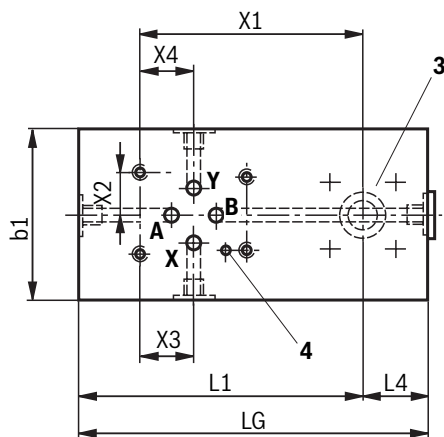

NG10 and 20

Porting pattern according to ISO 5781

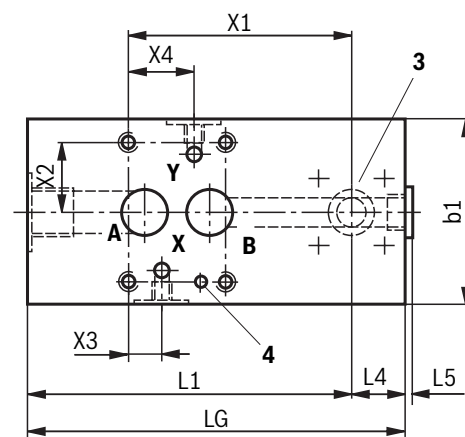

- 1 Adapter plate for type of mounting MT4
(included in the scope of delivery for MT4)
- 2 Line connection "B", dimensions see also page 12 ... 19
- 3 Port "B" to the piston side according to ISO 6164
- 4 Bore for locking pin



Notice:

- ▶ Seal designs "T" and "S" are not designed for the static holding function.
- ▶ Valves, fittings and piping are not included in the scope of delivery.

Subplates for valve mounting (check valves type SV and SL)
(dimensions in mm)

ØAL	Valve size (NG)	PJ	EE	Minimum stroke ¹⁾		X0
				²⁾	³⁾	
40	6	97	G1/2	100	100	34.5
50	6	111	G1/2	100	100	44
63	6	117	G3/4	100	100	52
	10	117	G3/4	100	100	52
80	6	134	G3/4	100	100	60
	10	134	G3/4	100	100	60
100	10	162	G1	100	100	72
125	10	174	G1	100	106	91
	20	174	G1	100	106	91
160	10	191	G1 1/4	100	163	114
	20	191	G1 1/4	100	163	114
200	10	224	G1 1/4	100	202	138
	20	224	G1 1/4	100	202	138


ØAL	Plate dimensions							Port size, porting pattern						Position point of valve	
	L1	L4	L5	LG	b1	h1	h9	h2	A	X	Y	X3	X4	X1	X2
40	90	20	4	110	55	40	10	20	G1/2	G1/4	G1/4	21.5	21.5	65.5	15.5
50	90	20	4	110	55	40	10	20	G1/2	G1/4	G1/4	21.5	21.5	65.5	15.5
63	100	25	5	125	55	45	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	70.5	15.5
	105	25	6	130	85	45	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	73	33.35
80	100	25	5	125	55	45	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	70.5	15.5
	105	25	5	130	85	45	10	22.5	G3/4	G1/4	G1/4	21.5	21.5	73	33.35
100	102	28	5	130	85	50	10	25	G1	G1/4	G1/4	21.5	21.5	70	33.35
125	102	28	5	130	85	50	20	25	G1	G1/4	G1/4	21.5	21.5	70	33.35
	137	28	5	165	100	50	20	25	G1	G1/4	G1/4	20.6	39.5	92	39.7
160	115	35	5	150	85	60	20	30	G1 1/4	G1/4	G1/4	21.5	21.5	80	33.35
	140	35	5	175	100	60	20	30	G1 1/4	G1/4	G1/4	20.6	39.5	95	39.7
200	115	35	5	150	85	60	20	30	G1 1/4	G1/4	G1/4	21.5	21.5	80	33.35
	140	35	5	175	100	60	20	30	G1 1/4	G1/4	G1/4	20.6	39.5	95	39.7

ØAL = piston Ø

¹⁾ The information only applies to the following connection situation, see representation.


²⁾ Not for "MT4"

³⁾ Only for "MT4"

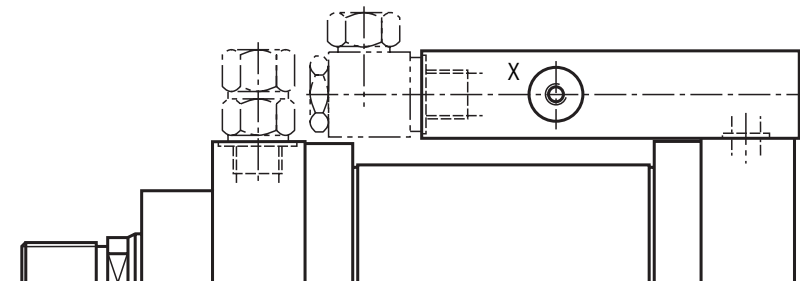


Subplates for valve mounting (switching and proportional directional valves) (dimensions in mm)


Installation situation with "MT4"

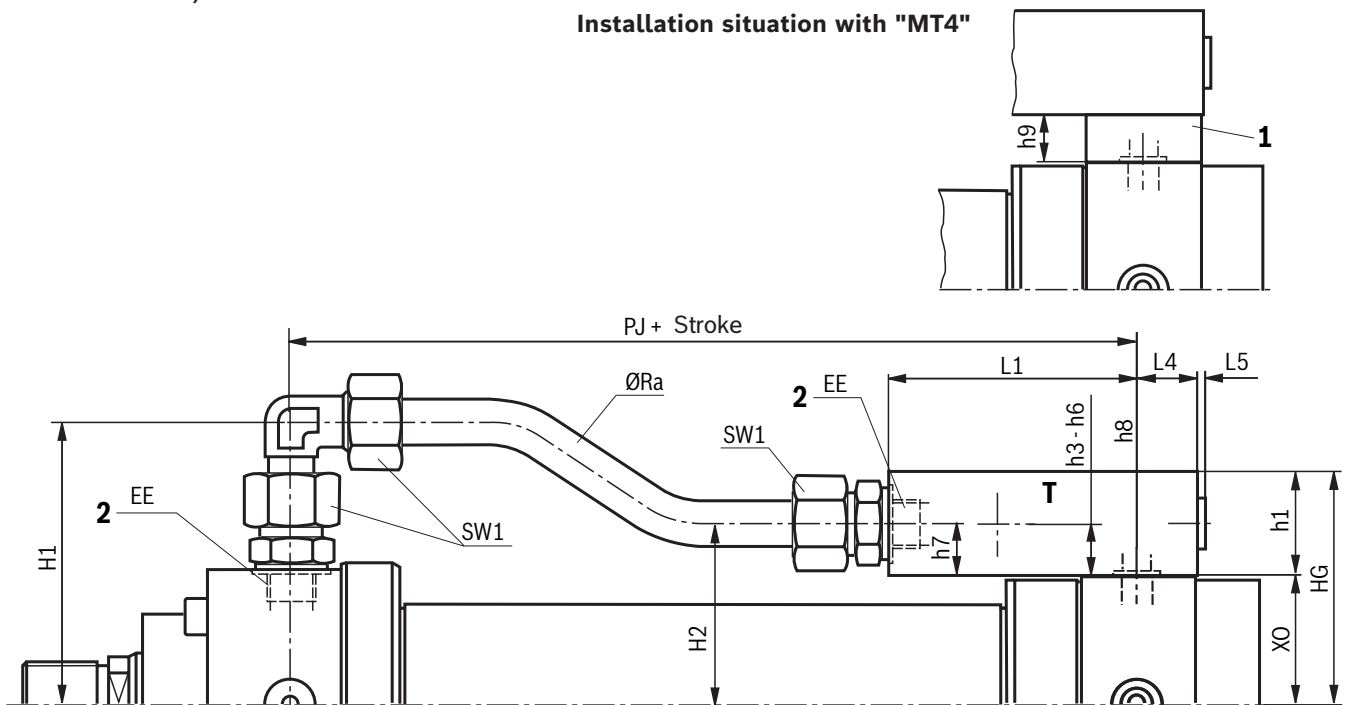


NG6

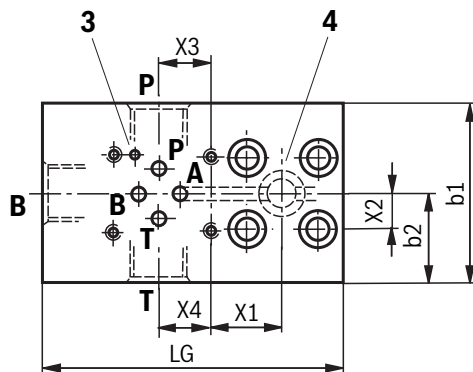

NG10

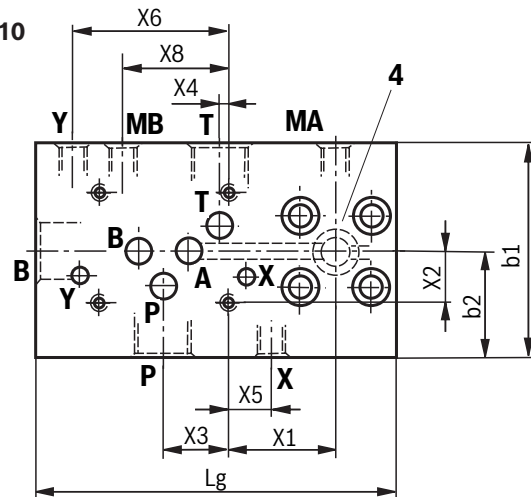

NG16

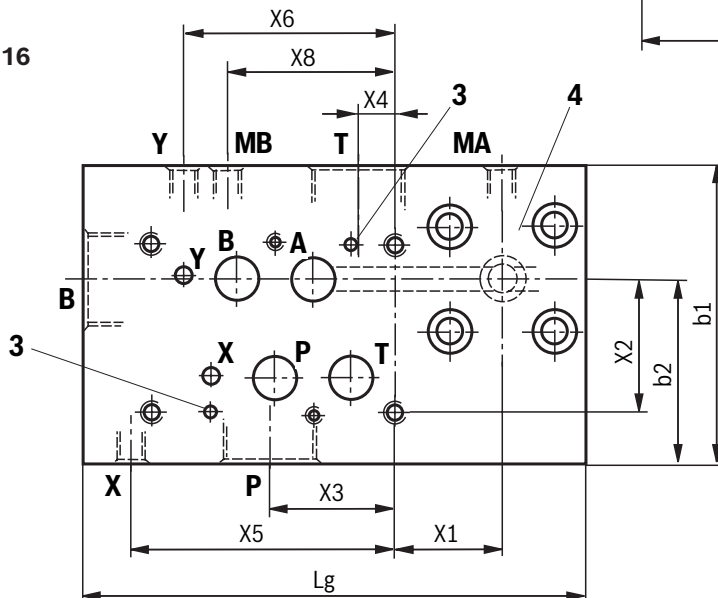

- 1 Adapter plate for type of mounting "MT4"
(included in the scope of delivery for "MT4")
- 2 Line connection "B"
(dimensions see also page 12 ... 19)
- 3 Bore for locking pin
- 4 Line connection "B" to the piston side
according to ISO 6164



Notice:

Porting pattern according to ISO 4401

Subplates for valve mounting (switching and proportional directional valves) (dimensions in mm)

ØAL	Valve size (NG)	PJ	EE	Minimum stroke	Plate and piping dimensions																	
					L1	L4	L5 _{max.}	H1	H2 ₁₎	H2 ₂₎	SW1	ØRa	b1	h1	lg	HG ₁₎	HG ₂₎	b2	X0	h7	h9	
40	6	97	G1/2	255	90	20	4	90	54.5	64.5	30	16.0 x 2.5	65	40	110	74.5	84.5	32.5	34.5	20	10	
50	6	111	G1/2	245	90	20	4	99	64	74	30	16.0 x 2.5	65	40	110	84	94	32.5	44	20	10	
63	6	117	G3/4	290	100	25	5	119	74.5	84.5	36	20.0 x 3.0	75	45	125	97	107	37.5	52	22.5	10	
	10	117	G3/4	315	125	25	5	119	75	85	36	20.0 x 3.0	90	70	150	122	132	45	52	23	10	
80	6	134	G3/4	275	100	25	5	127	82.5	92.5	36	20.0 x 3.0	75	45	125	105	115	37.5	60	22.5	10	
	10	134	G3/4	300	125	25	5	127	83	93	36	20.0 x 3.0	90	70	150	130	140	45	60	23	10	
100	10	162	G1	330	132	28	5	148	102	112	46	25.0 x 4.0	90	80	160	152	162	45	72	30	10	
125	10	174	G1	315	132	28	5	165	121	141	46	25.0 x 4.0	90	80	160	171	191	45	91	30	20	
	16	174	G1	340	162	28	5	165	131	151	46	25.0 x 4.0	120	90	190	181	201	77.5	91	40	20	
160	10	191	G1 1/4	345	135	35	5	193.5	149	169	50	30.0 x 5.0	105	95	170	209	229	55	114	35	20	
	16	191	G1 1/4	375	175	35	5	193.5	159	179	50	30.0 x 5.0	125	100	210	214	234	77.5	114	45	20	
200	10	224	G1 1/4	310	135	35	5	216.5	173	193	50	30.0 x 5.0	105	95	170	233	253	55	138	35	20	
	16	224	G1 1/4	345	175	35	5	216.5	183	203	50	30.0 x 5.0	125	100	210	238	258	77.5	138	45	20	

ØAL	Valve size (NG)	Port size, porting pattern															
		P	X3	h3	T	X4	h4	X	X5	h5	Y	X6	h6	MA	MB	X8	h8
40	6	G1/2	21.5	20	G1/2	21.5	20	-	-	-	-	-	-	-	-	-	-
50	6	G1/2	21.5	20	G1/2	21.5	20	-	-	-	-	-	-	-	-	-	-
63	6	G3/4	21.5	22.5	G3/4	21.5	22.5	-	-	-	-	-	-	-	-	-	-
	10	G3/4	27	33	G3/4	3.5	33	G1/4	18	47	G1/4	65	47	G1/4	G1/4	60	17
80	6	G3/4	21.5	22.5	G3/4	21.5	22.5	-	-	-	-	-	-	-	-	-	-
	10	G3/4	27	33	G3/4	3.5	33	G1/4	18	47	G1/4	65	47	G1/4	G1/4	60	17
100	10	G1	27	30	G1	3.5	40	G1/4	18	57	G1/4	65	57	G1/4	G1/4	58	20
125	10	G1	27	30	G1	3.5	40	G1/4	18	57	G1/4	65	57	G1/4	G1/4	58	20
	16	G1	50	26	G1	17.0	25	G1/4	105	45	G1/4	88	70	G1/4	G1/4	88	35
160	10	G1 1/4	27	35	G1 1/4	3.5	45	G1/4	20	72	G1/4	65	72	G1/4	G1/4	55	25
	16	G1 1/4	52	32	G1 1/4	15.0	32	G1/4	110	55	G1/4	88	80	G1/4	G1/4	88	40
200	10	G1 1/4	27	35	G1 1/4	3.5	45	G1/4	20	72	G1/4	65	72	G1/4	G1/4	55	25
	16	G1 1/4	52	32	G1 1/4	15.0	32	G1/4	110	55	G1/4	88	80	G1/4	G1/4	88	40

ØAL	Valve size (NG)	Position point of valve	
		X1	X2
40	6	25	15.5
50	6	25	15.5
63	6	30	15.5
	10	45	21.4
80	6	30	15.5
	10	45	21.4
100	10	52	21.4
125	10	52	21.4
	16	37	55.6
160	10	55	21.4
	16	45	55.6
200	10	55	21.4
	16	45	55.6



Notice:

The dimensions h3, h4, h5, h6, h8 and X3, X4, X5, X6 determine the position of ports P, T, B, X, Y.


ØAL = piston Ø

1) Not for "MT4"

2) Only for "MT4"

Bleeding / measuring coupling
(dimensions in mm)


By default, a patented safety vent against unintended screwing out in head and base is delivered for piston $\varnothing \geq 40$ mm.
For piston $\varnothing 25$ and 32 mm, a bleed screw G1/8 is installed in head and base which is not secured against screwing out.
The port allows for the installation of a measuring coupling with check valve for pressure measurement or contamination-free bleeding. Measuring coupling with check valve function, i.e. it can also be connected when the system is pressurized.




1) Bleeding: With view to the piston rod, the position is always offset by 90° in relation to the line connection (clockwise)

Connection possibility for measuring coupling


Piston $\varnothing$ (AL) 25 and 32 mm

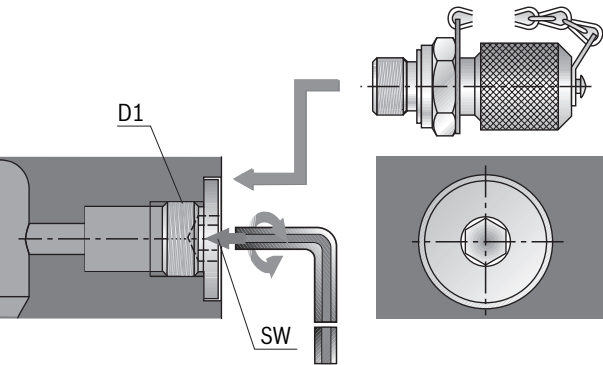

Piston $\varnothing$ (AL) 40 ... 200 mm

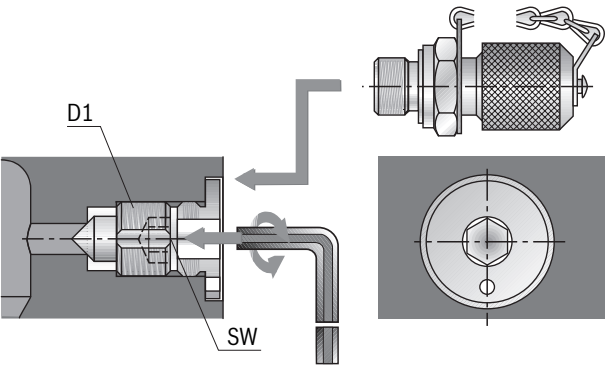

ØAL	Bleed screw			Measuring coupling D2
	D1	Fuse	SW	
25 and 32	G1/8	not secured	5	G1/8
40 and 50	G1/8	secured	5	G1/8
63 ... 200	G1/4	secured	6	G1/4

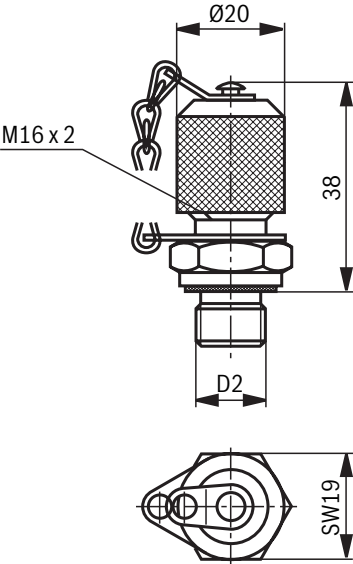

Scope of delivery: measuring coupling **G1/8**
MEASURING COUPLING AB 20-11/K3 G1/8 with
seal ring made of NBR
Material no. **R900014363**
MEASURING COUPLING AB 20-11/K3V G1/8 with
seal ring made of FKM
Material no. **R900024710**

Scope of delivery: measuring coupling **G1/4**
MEASURING COUPLING AB 20-11/K1 G1/4 with
seal ring made of NBR
Material no. **R900009090**
MEASURING COUPLING AB 20-11/K1V G1/4 with
seal ring made of FKM
Material no. **R900001264**


Throttle valve

(dimensions in mm)

ØAL	25	32	40	50	63	80	100	125	160	200
Protrusion A ¹⁾	6.5	4	5.5	1.5	0	0	0	0	0	0


ØAL = piston Ø

¹⁾ Throttle valve only with end position damping "E"
(180° for bleeding) Protrusion A in closed condition



Swivel head **CGKD** (clampable)
(dimensions in mm)

ISO 8132

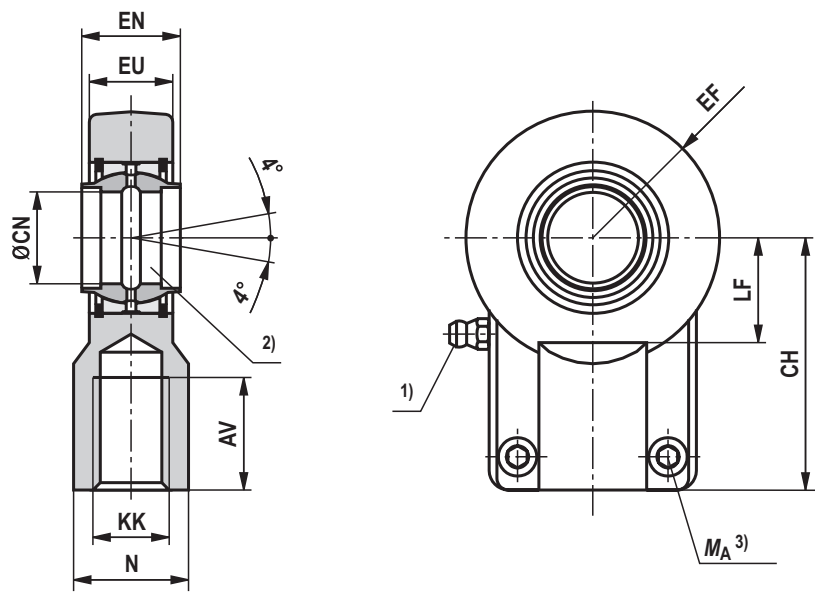

ØAL	ØMM	Type	Material no. Maintenance required ¹⁾	Material no. Flat type grease nipple ⁴⁾	Nominal force kN	AV min.	N max.	CH js13	EF max.	ØCN H7 ²⁾	EN h12	EU max.
25	14	CGKD 12 ⁵⁾	R900540998	–	8	17	19	38	16.5	12	12	11
	18	CGKD 12 ⁵⁾	R900540998	–	8	17	19	38	16.5	12	12	11
	18	CGKD 16	R900308559	–	12.5	19	22	44	20.5	16	16	14
32	18	CGKD 16	R900308559	–	12.5	19	22	44	20.5	16	16	14
	22	CGKD 16	R900308559	–	12.5	19	22	44	20.5	16	16	14
	22	CGKD 20	R900308576	–	20	23	28	52	25	20	20	17.5
40	22	CGKD 20	R900308576	–	20	23	28	52	25	20	20	17.5
	28	CGKD 20	R900308576	–	20	23	28	52	25	20	20	17.5
	28	CGKD 25	R900323332	R901085733	32	29	31	65	32	25	25	22
50	28	CGKD 25	R900323332	R901085733	32	29	31	65	32	25	25	22
	36	CGKD 25	R900323332	R901085733	32	29	31	65	32	25	25	22
	36	CGKD 32	R900322049	R900322036	50	37	38	80	40	32	32	28
63	36	CGKD 32	R900322049	R900322036	50	37	38	80	40	32	32	28
	45	CGKD 32	R900322049	R900322036	50	37	38	80	40	32	32	28
	45	CGKD 40	R900322029	R900851873	80	46	47	97	50	40	40	34
80	45	CGKD 40	R900322029	R900851873	80	46	47	97	50	40	40	34
	56	CGKD 40	R900322029	R900851873	80	46	47	97	50	40	40	34
	56	CGKD 50	R900322719	R900322033	125	57	58	120	63	50	50	42
100	56	CGKD 50	R900322719	R900322033	125	57	58	120	63	50	50	42
	70	CGKD 50	R900322719	R900322033	125	57	58	120	63	50	50	42
	70	CGKD 63	R900322028	R900322032	200	64	70	140	72.5	63	63	53.5
125	70	CGKD 63	R900322028	R900322032	200	64	70	140	72.5	63	63	53.5
	90	CGKD 63	R900322028	R900322032	200	64	70	140	72.5	63	63	53.5
	90	CGKD 80	R900322700	R900322031	320	86	91	180	92	80	80	68
160	90	CGKD 80	R900322700	R900322031	320	86	91	180	92	80	80	68
	110	CGKD 80	R900322700	R900322031	320	86	91	180	92	80	80	68
	110	CGKD 100	R900322030	R900322034	500	96	110	210	114	100	100	85.5
200	110	CGKD 100	R900322030	R900322034	500	96	110	210	114	100	100	85.5
	140	CGKD 100	R900322030	R900322034	500	96	110	210	114	100	100	85.5
	140	CGKD 125	R900322026	R900322673	800	113	135	260	160	125	125	105

Swivel head CGKD (clampable) (dimensions in mm)

ØAL	ØMM	Type	KK 6H	LF min.	Clamping screw ISO 4762-10.9	$M_A^{3)}$ Nm	$m^{6)}$ kg	$C_0^{7)}$ kN	$F_{adm}^{8)}$ kN
25	14	CGKD 12 ⁵⁾	M12 x 1.25	13	M5 x 16	6	0.1	24.5	9.0
	18	CGKD 12 ⁵⁾	M12 x 1.25	13	M5 x 16	6	0.1	24.5	9.0
	18	CGKD 16	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
32	18	CGKD 16	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
	22	CGKD 16	M14 x 1.5	16.5	M6 x 14	10	0.2	36.5	13.5
	22	CGKD 20	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
40	22	CGKD 20	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
	28	CGKD 20	M16 x 1.5	20.5	M8 x 20	25	0.35	48	17.7
	28	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
50	28	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
	36	CGKD 25	M20 x 1.5	25.5	M8 x 20	30	0.65	78	28.8
	36	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
63	36	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
	45	CGKD 32	M27 x 2	30	M10 x 25	59	1.15	114	42.1
	45	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
80	45	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
	56	CGKD 40	M33 x 2	39	M10 x 30	59	2.1	204	75.3
	56	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
100	56	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
	70	CGKD 50	M42 x 2	47	M12 x 35	100	4	310	114.4
	70	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
125	70	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
	90	CGKD 63	M48 x 2	58	M16 x 40	250	7.2	430	158.7
	90	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
160	90	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
	110	CGKD 80	M64 x 3	74	M20 x 50	490	15	695	265.5
	110	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
200	110	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
	140	CGKD 100	M80 x 3	94	M24 x 60	840	25.5	1060	391.1
	140	CGKD 125	M100 x 3	116	M24 x 70	840	52.5	1430	527.7

ØAL = piston Ø

ØMM = piston rod Ø

1) Grease nipple, cone head form A according to DIN 71412

2) Bolt Ø m6 required

3) M_A = tightening torque

4) Form A flat type grease nipple according to DIN 3404

5) Bearing cannot be re-lubricated

6) m = weight of swivel head in kg

7) C_0 = static load rating of the swivel head


8) F_{zul} = maximum admissible load on the swivel head during oscillatory or alternating loads

Notice:

Geometry and dimensions may differ depending on the manufacturer. In case of combination with other mounting elements, the usability must be checked. The clevis brackets are suitable for attachment in case of type of mounting "MP5" and at the swivel head. The swivel head must always be screwed against the shoulder of the piston rod. Afterwards, the clamping screws must be tightened with the specified tightening torque.

Fork clevis CCKB (clampable)
(dimensions in mm)

ISO 8132

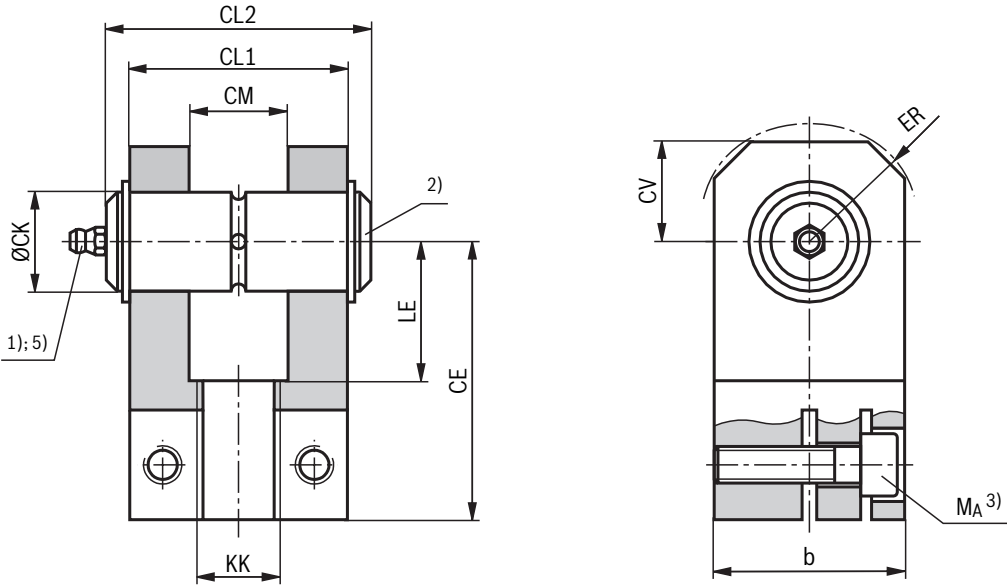

ØAL	ØMM	Type	Material no. Maintenance required ¹⁾	Nominal force kN	b max.	CE js13	ØCK H9 ²⁾	CL1 h16	CL2 max.	CM A13	ER max.
25	14	CCKB 12 ⁵⁾	R900542842	8	25	38	12	28	49	12	16
	18	CCKB 12 ⁵⁾	R900542842	8	25	38	12	28	49	12	16
	18	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
32	18	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
	22	CCKB 16	R900542843	12.5	30	44	16	36	57	16	20
	22	CCKB 20	R900542844	20	40	52	20	45	72	20	25
40	22	CCKB 20	R900542844	20	40	52	20	45	72	20	25
	28	CCKB 20	R900542844	20	40	52	20	45	72	20	25
	28	CCKB 25	R900542845	32	50	65	25	56	84	25	32
50	28	CCKB 25	R900542845	32	50	65	25	56	84	25	32
	36	CCKB 25	R900542845	32	50	65	25	56	84	25	32
	36	CCKB 32	R900542846	50	65	80	32	70	105	32	40
63	36	CCKB 32	R900542846	50	65	80	32	70	105	32	40
	45	CCKB 32	R900542846	50	65	80	32	70	105	32	40
	45	CCKB 40	R900542847	80	80	97	40	90	133	40	50
80	45	CCKB 40	R900542847	80	80	97	40	90	133	40	50
	56	CCKB 40	R900542847	80	80	97	40	90	133	40	50
	56	CCKB 50	R900542848	125	100	120	50	110	165	50	63
100	56	CCKB 50	R900542848	125	100	120	50	110	165	50	63
	70	CCKB 50	R900542848	125	100	120	50	110	165	50	63
	70	CCKB 63	R900542849	200	140	140	63	140	185	63	71
125	70	CCKB 63	R900542849	200	140	140	63	140	185	63	71
	90	CCKB 63	R900542849	200	140	140	63	140	185	63	71
	90	CCKB 80	R900542850	320	180	180	80	170	225	80	90
160	90	CCKB 80	R900542850	320	180	180	80	170	225	80	90
	110	CCKB 80	R900542850	320	180	180	80	170	225	80	90
	110	CCKB 100	⁶⁾	500	220	210	100	210	⁶⁾	100	110
200	110	CCKB 100	⁶⁾	500	220	210	100	210	⁶⁾	100	110
	140	CCKB 100	⁶⁾	500	220	210	100	210	⁶⁾	100	110

Fork clevis CCKB (clampable) (dimensions in mm)

ØAL	ØMM	Type	KK 6H	LE min.	CV max.	Clamping screw ISO 4762-10.9	$M_A^{3)}$ Nm	$m^{4)}$ kg
25	14	CCKB 12 ⁵⁾	M12 x 1.25	18	16	M4 x 16	2.9	0.2
	18	CCKB 12 ⁵⁾	M12 x 1.25	18	16	M4 x 16	2.9	0.2
	18	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
32	18	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
	22	CCKB 16	M14 x 1.5	22	20	M6 x 20	10	0.35
	22	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
40	22	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
	28	CCKB 20	M16 x 1.5	27	25	M8 x 30	25	0.7
	28	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
50	28	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
	36	CCKB 25	M20 x 1.5	34	32	M10 x 35	49	1.4
	36	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
63	36	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
	45	CCKB 32	M27 x 2	41	40	M12 x 40	85	2.8
	45	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
80	45	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
	56	CCKB 40	M33 x 2	51	50	M16 x 50	210	5.2
	56	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
100	56	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
	70	CCKB 50	M42 x 2	63	63	M20 x 60	425	9.5
	70	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
125	70	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
	90	CCKB 63	M48 x 2	75	71	M24 x 80	730	21.5
	90	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
160	90	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
	110	CCKB 80	M64 x 3	94	90	M30 x 100	1450	38.2
	110	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾
200	110	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾
	140	CCKB 100	M80 x 3	114	110	M36 x 130	2480	⁶⁾

ØAL = piston Ø

ØMM = piston rod Ø

¹⁾ Grease nipple, cone head form A according to DIN 71412

²⁾ Bolt Ø m6 required
(bolt and bolt lock are included in the scope of delivery and not mounted upon delivery)

³⁾ M_A = tightening torque
The fork clevis must always be screwed against the shoulder of the piston rod. Afterwards, the clamping screws must be tightened with the specified tightening torque.

⁴⁾ m = mass of the fork clevis in kg

⁵⁾ Without lubrication bore

⁶⁾ On request




Notice:

Geometry and dimensions may differ depending on the manufacturer.
All graphical representations are examples.

In case of combination with other mounting elements, the usability must be checked.

Clevis bracket CLCA
(dimensions in mm)

ISO 8132

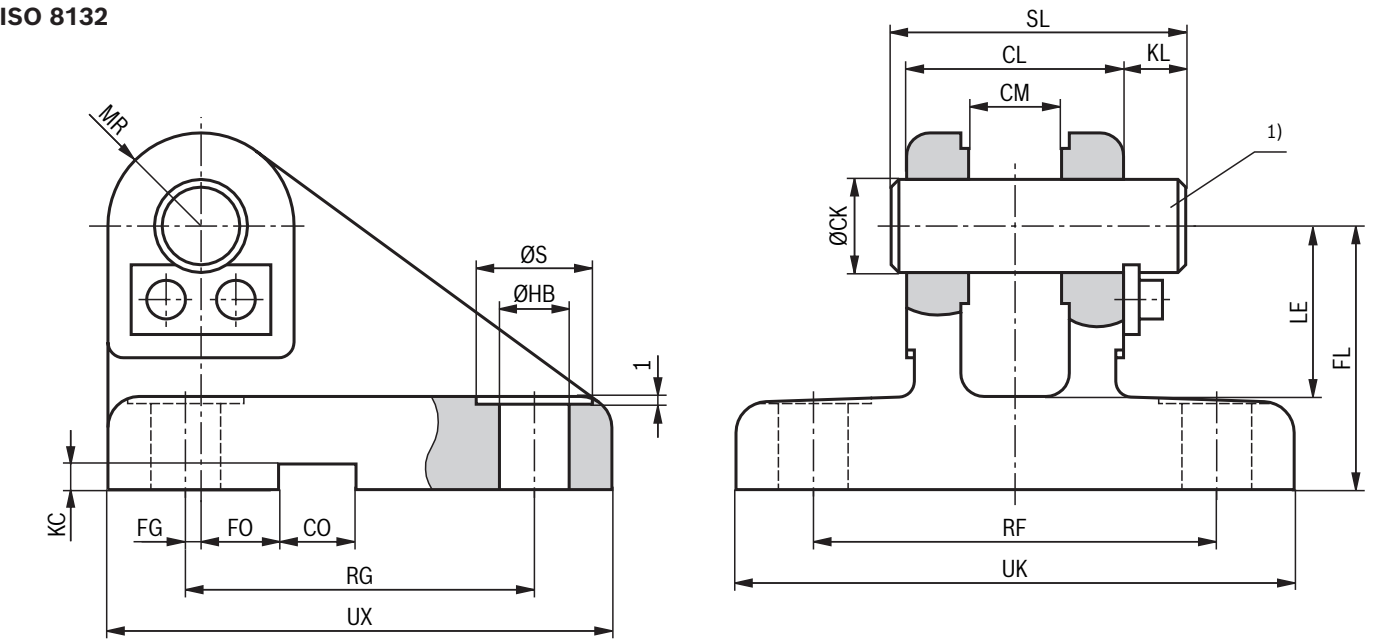

ØAL	ØMM	Type	Material no.	Nominal force kN	ØCK H9 1)	CL h16	CM A13	CO N9	FG JS14	FL js13	FO JS14
25	14	CLCA 12	R900542861	8	12	28	12	10	2	34	10
	18	CLCA 12	R900542861	8	12	28	12	10	2	34	10
	18	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
32	18	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
	22	CLCA 16	R900542862	12.5	16	36	16	16	3.5	40	10
	22	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
40	22	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
	28	CLCA 20	R900542863	20	20	45	20	16	7.5	45	10
	28	CLCA 25	R900542864	32	25	56	25	25	10	55	10
50	28	CLCA 25	R900542864	32	25	56	25	25	10	55	10
	36	CLCA 25	R900542864	32	25	56	25	25	10	55	10
	36	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
63	36	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
	45	CLCA 32	R900542865	50	32	70	32	25	14.5	65	6
	45	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
80	45	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
	56	CLCA 40	R900542866	80	40	90	40	36	17.5	76	6
	56	CLCA 50	R900542867	125	50	110	50	36	25	95	0
100	56	CLCA 50	R900542867	125	50	110	50	36	25	95	0
	70	CLCA 50	R900542867	125	50	110	50	36	25	95	0
	70	CLCA 63	R900542868	200	63	140	63	50	33	112	0
125	70	CLCA 63	R900542868	200	63	140	63	50	33	112	0
	90	CLCA 63	R900542868	200	63	140	63	50	33	112	0
	90	CLCA 80	R900542869	320	80	170	80	50	45	140	0
160	90	CLCA 80	R900542869	320	80	170	80	50	45	140	0
	110	CLCA 80	R900542869	320	80	170	80	50	45	140	0
	110	CLCA 100	R901261098 ³⁾	500	100	210	100	63	52.5	180	0
200	110	CLCA 100	R901261098 ³⁾	500	100	210	100	63	52.5	180	0
	140	CLCA 100	R901261098 ³⁾	500	100	210	100	63	52.5	180	0
	140	CLCA 125	R901373011 ³⁾	800	125	270	125	80	75	230	0

Clevis bracket CLCA

(dimensions in mm)

ØAL	ØMM	Type	ØHB H13	KC +0.3	KL	LE min.	MR max.	RF js13	RG js13	ØS	SL	UK max.	UX max.	m ²⁾ kg
25	14	CLCA 12	9	3.3	8	22	12	52	45	15	38	72	65	0.45
	18	CLCA 12	9	3.3	8	22	12	52	45	15	38	72	65	0.45
	18	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
32	18	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
	22	CLCA 16	11	4.3	8	27	16	65	55	18	46	90	80	1
	22	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
40	22	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
	28	CLCA 20	11	4.3	10	30	20	75	70	18	58	100	95	1.5
	28	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
50	28	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
	36	CLCA 25	13.5	5.4	10	37	25	90	85	20	69	120	115	3
	36	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
63	36	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
	45	CLCA 32	17.5	5.4	13	43	32	110	110	26	87	145	145	5
	45	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
80	45	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
	56	CLCA 40	22	8.4	16	52	40	140	125	33	110	185	170	9.6
	56	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
100	56	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
	70	CLCA 50	26	8.4	19	65	50	165	150	40	133	215	200	15.5
	70	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
125	70	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
	90	CLCA 63	33	11.4	20	75	63	210	170	48	164	270	230	27.5
	90	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
160	90	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
	110	CLCA 80	39	11.4	26	95	80	250	210	57	202	320	280	47
	110	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	³⁾
200	110	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	³⁾
	140	CLCA 100	52	12.4	30	120	100	315	250	76	246	405	345	³⁾
	140	CLCA 125	52	15.4	32	170	125	365	350	76	310	455	450	³⁾

ØAL = piston Ø

ØMM = piston rod Ø

1) Bolt Ø m6 required
(bolt and bolt lock are included in the scope of delivery
and not mounted upon delivery)

2) **m** = Weight of clevis bracket in kg

3) On request




Notice:

Geometry and dimensions may differ depending on the manufacturer.
All graphical representations are examples.
In case of combination with other mounting elements, the usability
must be checked.

Clevis bracket CLCD
(dimensions in mm)

ISO 8132

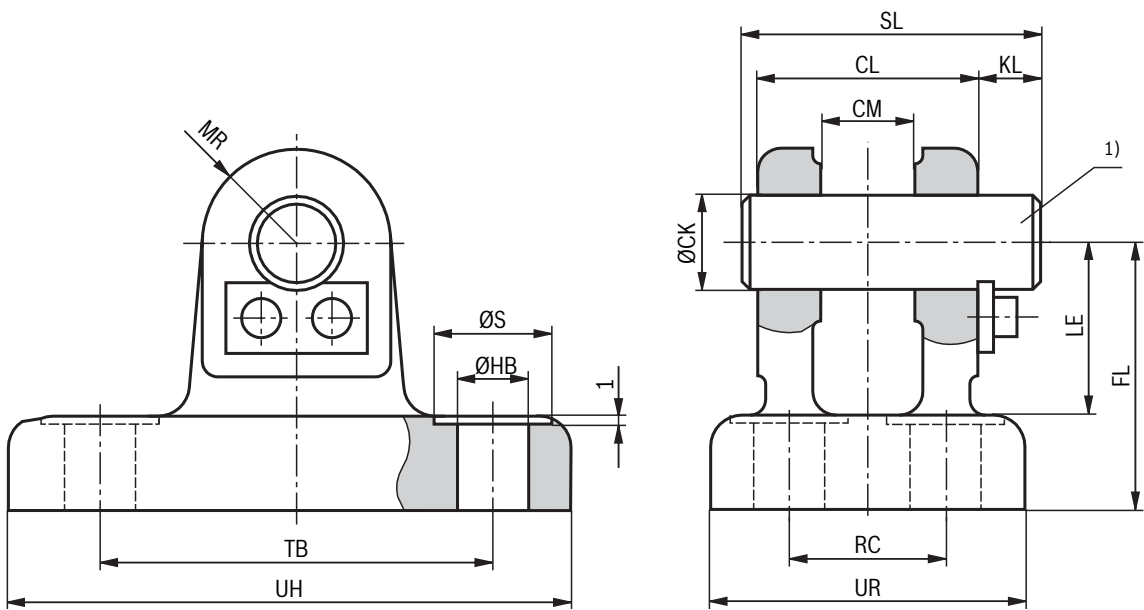

ØAL	ØMM	Type	Material no.	Nominal force kN	ØCK H9 1)	CL h16	CM A13	FL js12	ØHB H13	KL
25	14	CLCD 12	R900542879	8	12	28	12	34	9	8
	18	CLCD 12	R900542879	8	12	28	12	34	9	8
	18	CLCD 16	R900542880	12.5	16	36	16	40	11	8
32	18	CLCD 16	R900542880	12.5	16	36	16	40	11	8
	22	CLCD 16	R900542880	12.5	16	36	16	40	11	8
	22	CLCD 20	R900542881	20	20	45	20	45	11	10
40	22	CLCD 20	R900542881	20	20	45	20	45	11	10
	28	CLCD 20	R900542881	20	20	45	20	45	11	10
	28	CLCD 25	R900542882	32	25	56	25	55	13.5	10
50	28	CLCD 25	R900542882	32	25	56	25	55	13.5	10
	36	CLCD 25	R900542882	32	25	56	25	55	13.5	10
	36	CLCD 32	R900542883	50	32	70	32	65	17.5	13
63	36	CLCD 32	R900542883	50	32	70	32	65	17.5	13
	45	CLCD 32	R900542883	50	32	70	32	65	17.5	13
	45	CLCD 40	R900542884	80	40	90	40	76	22	16
80	45	CLCD 40	R900542884	80	40	90	40	76	22	16
	56	CLCD 40	R900542884	80	40	90	40	76	22	16
	56	CLCD 50	R900542885	125	50	110	50	95	26	19
100	56	CLCD 50	R900542885	125	50	110	50	95	26	19
	70	CLCD 50	R900542885	125	50	110	50	95	26	19
	70	CLCD 63	R900542886	200	63	140	63	112	33	20
125	70	CLCD 63	R900542886	200	63	140	63	112	33	20
	90	CLCD 63	R900542886	200	63	140	63	112	33	20
	90	CLCD 80	R900542887	320	80	170	80	140	39	26
160	90	CLCD 80	R900542887	320	80	170	80	140	39	26
	110	CLCD 80	R900542887	320	80	170	80	140	39	26
	110	CLCD 100	3)	500	100	210	100	180	45	30
200	110	CLCD 100	3)	500	100	210	100	180	45	30
	140	CLCD 100	3)	500	100	210	100	180	45	30
	140	CLCD 125	3)	800	125	270	125	230	52	32

Clevis bracket CLCD

(dimensions in mm)

ØAL	ØMM	Type	LE min.	MR max.	RC JS14	ØS	SL	TB JS14	UR max.	UH max.	m ²⁾ kg
25	14	CLCD 12	22	12	20	15	38	50	40	70	0.35
	18	CLCD 12	22	12	20	15	38	50	40	70	0.35
	18	CLCD 16	27	16	26	18	46	65	50	90	0.7
32	18	CLCD 16	27	16	26	18	46	65	50	90	0.7
	22	CLCD 16	27	16	26	18	46	65	50	90	0.7
	22	CLCD 20	30	20	32	18	58	75	58	98	0.95
40	22	CLCD 20	30	20	32	18	58	75	58	98	0.95
	28	CLCD 20	30	20	32	18	58	75	58	98	0.95
	28	CLCD 25	37	25	40	20	69	85	70	113	1.9
50	28	CLCD 25	37	25	40	20	69	85	70	113	1.9
	36	CLCD 25	37	25	40	20	69	85	70	113	1.9
	36	CLCD 32	43	32	50	26	87	110	85	143	3
63	36	CLCD 32	43	32	50	26	87	110	85	143	3
	45	CLCD 32	43	32	50	26	87	110	85	143	3
	45	CLCD 40	52	40	65	33	110	130	108	170	5.5
80	45	CLCD 40	52	40	65	33	110	130	108	170	5.5
	56	CLCD 40	52	40	65	33	110	130	108	170	5.5
	56	CLCD 50	65	50	80	40	133	170	130	220	10.6
100	56	CLCD 50	65	50	80	40	133	170	130	220	10.6
	70	CLCD 50	65	50	80	40	133	170	130	220	10.6
	70	CLCD 63	75	63	100	48	164	210	160	270	17
125	70	CLCD 63	75	63	100	48	164	210	160	270	17
	90	CLCD 63	75	63	100	48	164	210	160	270	17
	90	CLCD 80	95	80	125	57	202	250	210	320	32
160	90	CLCD 80	95	80	125	57	202	250	210	320	32
	110	CLCD 80	95	80	125	57	202	250	210	320	32
	110	CLCD 100	120	100	160	66	246	315	260	400	³⁾
200	110	CLCD 100	120	100	160	66	246	315	260	400	³⁾
	140	CLCD 100	120	100	160	66	246	315	260	400	³⁾
	140	CLCD 125	170	125	200	76	310	385	320	470	³⁾

ØAL = piston Ø

ØMM = piston rod Ø

¹⁾ Bolt Ø m6 required
(bolt and bolt lock are included in the scope of delivery
and not mounted upon delivery)

²⁾ **m** = mass of clevis bracket in kg

³⁾ On request



Notice:


Geometry and dimensions may differ depending on the manufacturer.
All graphical representations are examples.
In case of combination with other mounting elements, the usability
must be checked.

Trunnion mounting bearing block CLTB
(dimensions in mm)

ISO 8132

CLTB 12 ... 20

CLTB 25 ... 110

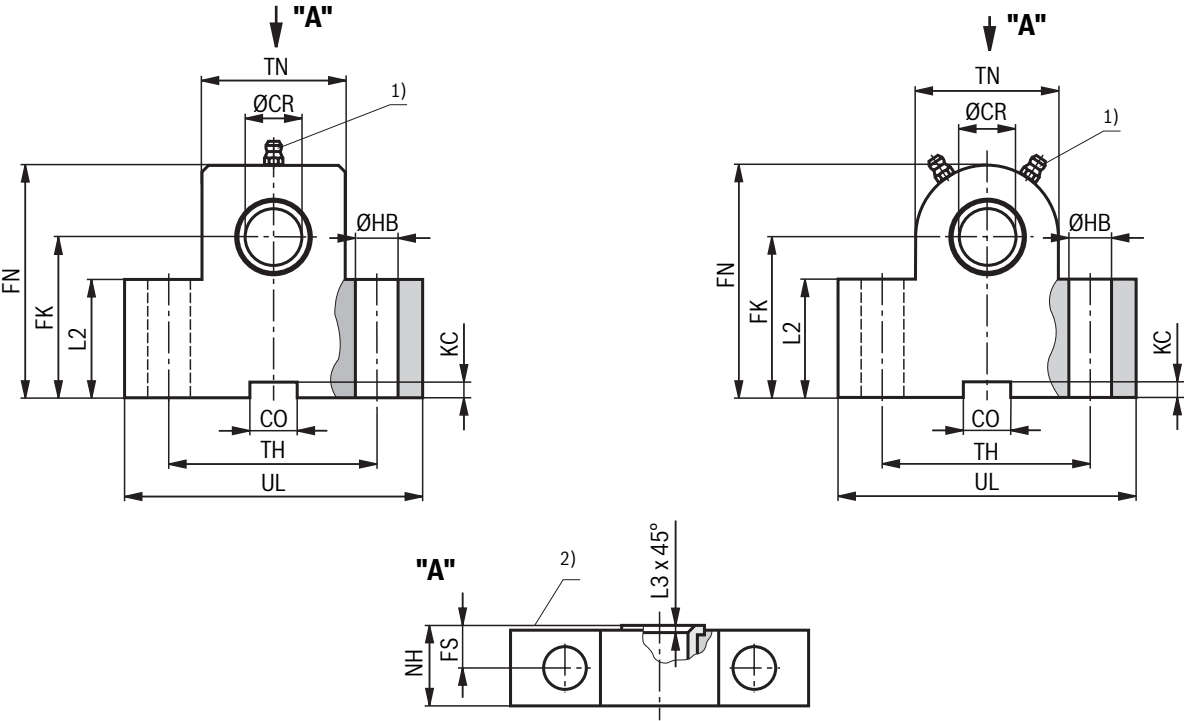

ØAL	Type ³⁾	Material no. Maintenance required ¹⁾	Nominal force kN ⁴⁾	ØCR H7	CO N9	FK JS12	FN max.	FS js13	ØHB H13	KC +0.3
25	CLTB 12	R900772607	8	12	10	34	50	8	9	3.3
32	CLTB 16	R900772608	12.5	16	16	40	60	10	11	4.3
40	CLTB 20	R900772609	20	20	16	45	70	10	11	4.3
50	CLTB 25	R900772610	32	25	25	55	80	12	13.5	5.4
63	CLTB 32	R900772611	50	32	25	65	100	15	17.5	5.4
80	CLTB 40	R900772612	80	40	36	76	120	16	22	8.4
100	CLTB 50	R900772613	125	50	36	95	140	20	26	8.4
125	CLTB 63	R900772614	200	63	50	112	180	25	33	11.4
160	CLTB 80	R900772615	320	80	50	140	220	31	39	11.4
200	CLTB 100	R901205929 ⁵⁾	500	100	63	180	280	45	52	12.4

Trunnion mounting bearing block CLTB

(dimensions in mm)

ØAL	Type ³⁾	TN max.	L2	L3	NH max.	TH js13	UL max.	m ⁶⁾ kg
25	CLTB 12	24	25	1	17	40	63	0.4
32	CLTB 16	31	30	1	21	50	80	0.85
40	CLTB 20	41	38	1.5	21	60	90	1.2
50	CLTB 25	56	45	1.5	26	80	110	2.1
63	CLTB 32	70	52	2	33	110	150	4.55
80	CLTB 40	88	60	2.5	41	125	170	7.3
100	CLTB 50	105	75	2.5	51	160	210	14.5
125	CLTB 63	130	85	3	61	200	265	23.1
160	CLTB 80	170	112	3.5	81	250	325	52.3
200	CLTB 100	215	145	4.5	102	295	385	⁵⁾

ØAL = piston Ø

- 1) Grease nipple, cone head form A according to DIN 71412
- 2) Trunnion mounting contact surface (inside)
- 3) Bearing blocks are always supplied in pairs
- 4) Nominal force applies to applications in pairs
- 5) On request
- 6) **m** = weight of trunnion mounting bearing block in kg (specified per pair)



Notice:

Geometry and dimensions may differ depending on the manufacturer. All graphical representations are examples. In case of combination with other mounting elements, the usability must be checked.
The trunnion mounting bearing blocks are suitable for attachment in case of type of mounting "MT4".

Buckling

For the admissible stroke length with flexibly guided load and a factor of 3.5 for safety against buckling, please refer to the relevant table. For other installation positions of the hydraulic cylinder, the admissible stroke length must be interpolated. Admissible stroke length for non-guided load on request. Buckling calculations are carried out according to the following formulas:

1. Calculation according to Euler

$$F = \frac{\pi^2 \cdot E \cdot I}{v \cdot L_K^2} \quad \text{if } \lambda > \lambda_g$$

- E** Module of elasticity in N/mm²
 = 2.1 x 10⁵ for steel
- I** Geometrical moment of inertia in mm⁴ for circular cross-section


2. Calculation according to Tetmajer

$$F = \frac{d^2 \cdot \pi (335 - 0,62 \cdot \lambda)}{4 \cdot v} \quad \text{if } \lambda > \lambda_g$$

- $\lambda_g = \frac{d^4 \cdot \pi}{64} = 0,0491 \cdot d^4$
- v** 3.5 (safety factor)
- L_K** free buckling length in mm (depending on the type of mounting see sketches A, B, C)
- d** Piston rod Ø in mm
- λ** Slenderness ratio

$$R_e = \frac{4 \cdot L_K}{\lambda_g} = \frac{4 \cdot L_K}{\pi \cdot \sqrt{\frac{E}{0,8 \cdot R_e}}}$$

Influence of the type of mounting on the buckling length:

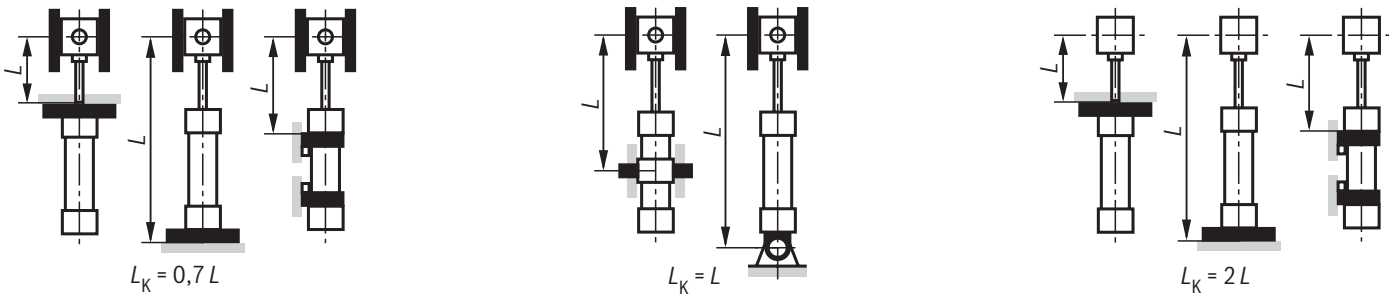


Buckling

(dimensions in mm)

Type of mounting "MT4" trunnion in cylinder center

ØAL	ØMM	admissible stroke length with								
		70 bar			100 bar			160 bar		
		0°	45°	90°	0°	45°	90°	0°	45°	90°
25	14	220	235	280	170	180	220	110	120	155
	18	430	455	530	340	365	430	250	265	320
32	18	295	315	375	230	245	295	160	170	210
	22	500	530	620	400	425	500	290	310	370
40	22	360	385	455	280	300	360	195	210	260
	28	665	700	820	535	565	665	395	420	500
50	28	490	520	615	385	410	490	275	295	355
	36	905	955	1110	730	775	905	550	580	685
63	36	665	700	825	525	560	665	380	405	490
	45	1130	1195	1385	920	970	1130	690	730	860
80	45	825	870	1025	655	695	825	475	510	610
	56	1385	1460	1700	1130	1190	1385	850	900	1055
100	56	1025	1085	1275	820	870	1025	595	635	760
	70	1740	1835	2130	1415	1495	1740	1070	1130	1325
125	70	1300	1375	1610	1040	1105	1300	765	815	970
	90	2340	2465	2855	1910	2015	2340	1450	1530	1790
160	90	1710	1805	2110	1375	1455	1710	1015	1080	1280
	110	2725	2870	3000	2225	2345	2725	1685	1780	2080
200	110	2025	2140	2500	1620	1720	2025	1195	1270	1510
	140	3000	3000	3000	2895	3000	3000	2200	2320	2710

Installation position

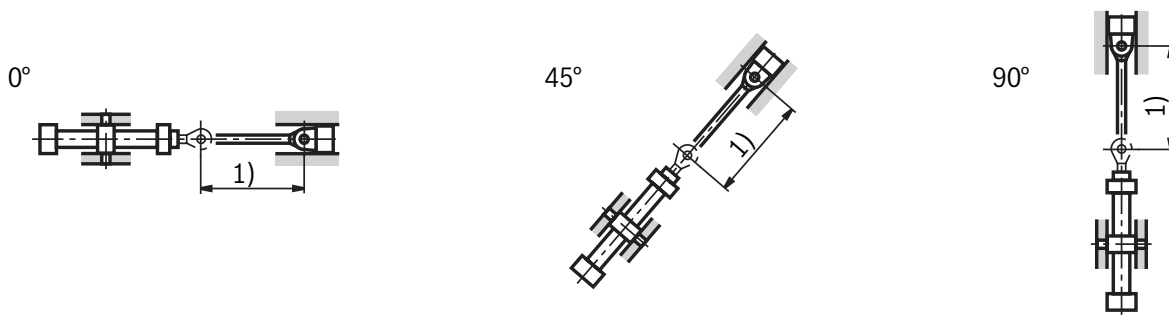


1) Admissible stroke length

Buckling
(dimensions in mm)

Type of mounting "MF1", "MF3", "MS2"

ØAL	ØMM	admissible stroke length with								
		70 bar			100 bar			160 bar		
		0°	45°	90°	0°	45°	90°	0°	45°	90°
25	14	600	600	600	565	575	600	430	440	465
	18	600	600	600	600	600	600	600	600	600
32	18	800	800	800	735	750	790	560	575	605
	22	800	800	800	800	800	800	800	800	800
40	22	1075	1095	1155	880	900	950	675	690	730
	28	1800	1840	1935	1490	1520	1600	1155	1180	1245
50	28	1400	1425	1505	1150	1175	1235	880	900	950
	36	2000	2000	2000	1980	2000	2000	1540	1570	1655
63	36	1845	1880	1980	1520	1550	1635	1170	1190	1260
	45	2000	2000	2000	2000	2000	2000	1910	1950	2000
80	45	2000	2000	2000	1865	1905	2000	1435	1465	1545
	56	2000	2000	2000	2000	2000	2000	2000	2000	2000
100	56	2820	2875	3000	2320	2370	2495	1785	1825	1925
	70	3000	3000	3000	3000	3000	3000	2920	2980	3000
125	70	3000	3000	3000	2910	2970	3000	2245	2290	2420
	90	3000	3000	3000	3000	3000	3000	3000	3000	3000
160	90	3000	3000	3000	3000	3000	3000	2915	2975	3000
	110	3000	3000	3000	3000	3000	3000	3000	3000	3000
200	110	3000	3000	3000	3000	3000	3000	3000	3000	3000
	140	3000	3000	3000	3000	3000	3000	3000	3000	3000

Installation position

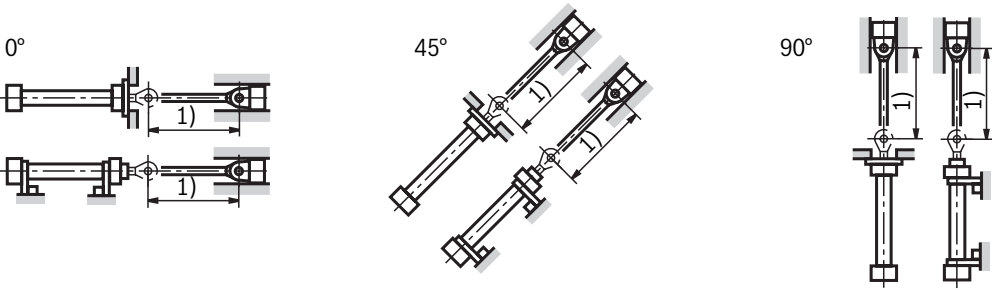

1) Admissible stroke length

End position damping

End position damping

The objective is to reduce the velocity of a moved mass, the center of gravity of which lies on the cylinder axis, to a level at which neither the hydraulic cylinder nor the machine into which the hydraulic cylinder is installed is damaged. For velocities above 20 mm/s, we recommend the use of an end position damping feature, which absorbs energy without requiring the use of additional equipment. It must, however, always be checked whether end position damping is also required for lower velocities with large masses.

Damping capacity

When decelerating masses via end position damping, the structural-inherent damping capacity must not be exceeded. Hydraulic cylinder with end position damping can achieve their full damping capacity only over the entire stroke length. With the adjustable end position damping version "E", a throttle valve is additionally provided when compared with version "D". End position damping version "E" allows cycle times to be optimized. The maximum damping capacity can only be achieved when the throttle valve is closed. The calculation depends on the factors mass, velocity, system pressure and

installation position.

For this reason, mass and velocity are used to determine the characteristic D_m and system pressure and installation position to determine the characteristic D_p . These two characteristics are used for verifying the admissible damping capacity in the "damping capacity" diagram.

The intersection point of the characteristics D_m and D_p must always be below the damping capacity curve of the selected hydraulic cylinder. The values in the diagrams refer to an average oil temperature of +45 ... +65 °C with the throttle valve being closed.

For special applications with very short stroke times, high velocities or large masses, hydraulic cylinder with special end position damping versions can be offered on request. When fixed or adjustable stops are used, special measures must be taken.

Formulas:

$$D_m = \frac{m}{10^K}; K = kv(0.5 - v)$$

m = moved mass in kg

v = stroke velocity in m/s

kv = see table page 44

Extension:

$$D_p = p_s - \frac{m \cdot 9.81 \cdot \sin \alpha}{A_1 \cdot 10}$$

Retraction:

$$D_p = p_s + \frac{m \cdot 9.81 \cdot \sin \alpha}{A_3 \cdot 10}$$






p_s = system pressure in bar

A_1 = piston area in cm² (see page 7)

A_3 = annulus area in cm² (see page 7)

α = angle to the horizontal in degrees

1 Throttle valve




Damping length

ØAL mm	25	32	40	50	63	80	100	125	160	200
Head side	15	19	23	22	27	27	32	33	40	46
Base side	15	19	23	22	27	27	32	33	40	46


End position damping / damping capacity

AL Ø in mm	25	32	40	50	63	80	100	125	160	200
k_v ①	2.97	2.56	2.82	3.51	3.02	2.53	2.65	2.91	2.76	2.95
k_v ②	3.15	2.93	2.95	3.45	2.95	2.53	2.93	2.95	2.95	3.1
k_v ③	3.1	2.73	3.1	3.51	2.95	2.51	2.91	2.95	2.91	2.93

Damping capacity:
Retraction and extension with k_v ②

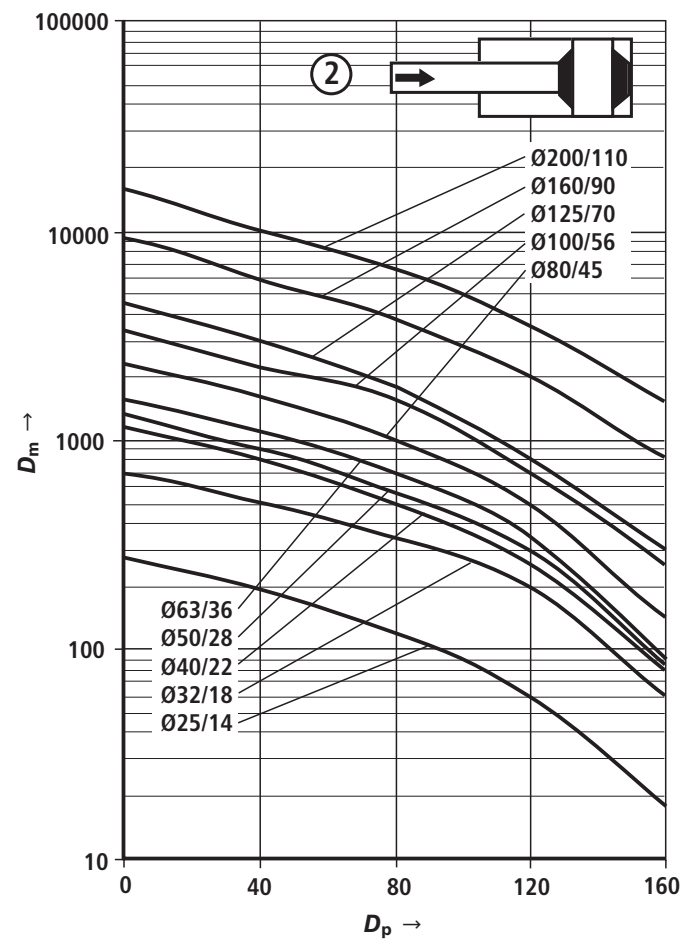

Damping capacity:
Retraction and extension with k_v ③

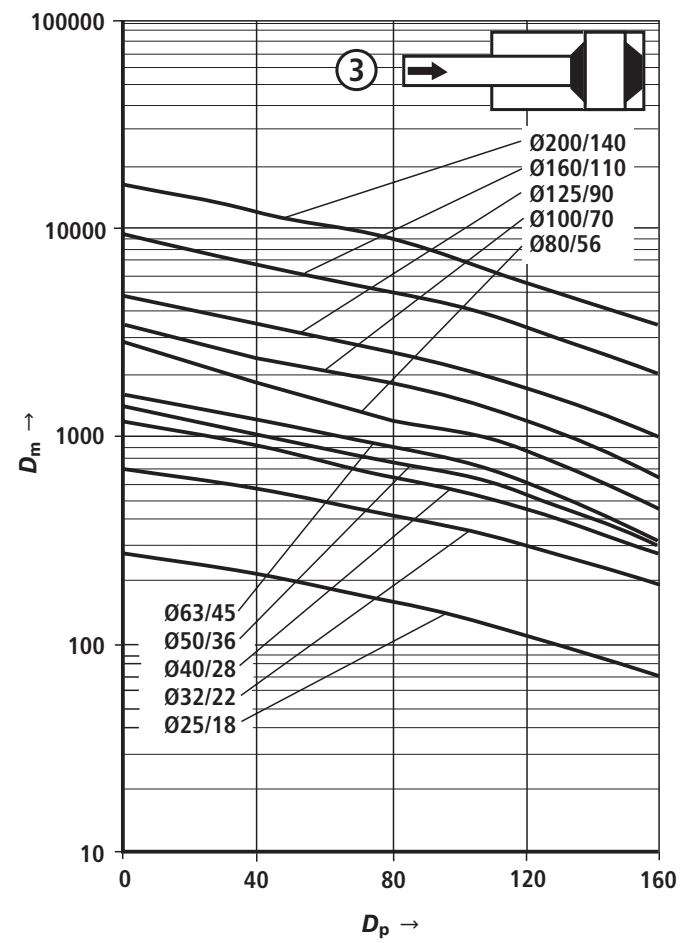

Selection criteria for seals

Working conditions

Hydraulic fluid	Hydraulic fluid temperature range	Seal versions				
		"M"	"V"	"A"	"T"	"S"
HL, HLP	−20 °C ... +80 °C	++	++	++	++	++
HFA	+5 °C ... +55 °C	+/-	+/-	+	++	+/-
HFC	−20 °C ... +60 °C	−	−	+/-	++	−
HFDR	−15 °C ... +80 °C	−	++	++	−	++
HFDU	−15 °C ... +80 °C	−	++	−	−	++

Environmental conditions

Ambient and rod temperature in the area of the piston rod		Seal versions				
		"M"	"V"	"A"	"T"	"S"
Standard	−20 °C ... +80 °C ¹⁾	++	+ ²⁾	++	+	++ ²⁾
Extended	+80 °C ... +120 °C ¹⁾	−	++	−	−	++

- ++ = very good
+ = good
+/- = conditional, depending on the application parameters
− = inappropriate


Notice:

- General technical data in corresponding data sheets will remain valid, see page 5.
- Generally, a hydraulic fluid temperature of approx. 40 °C is recommended. The specified values are to be regarded as guidelines; depending on the case of application, it may be necessary to check the suitability of the seal system.

¹⁾ Moreover, observe the corresponding hydraulic fluid temperature range

²⁾ Lower temperature limit −15 °C

Components

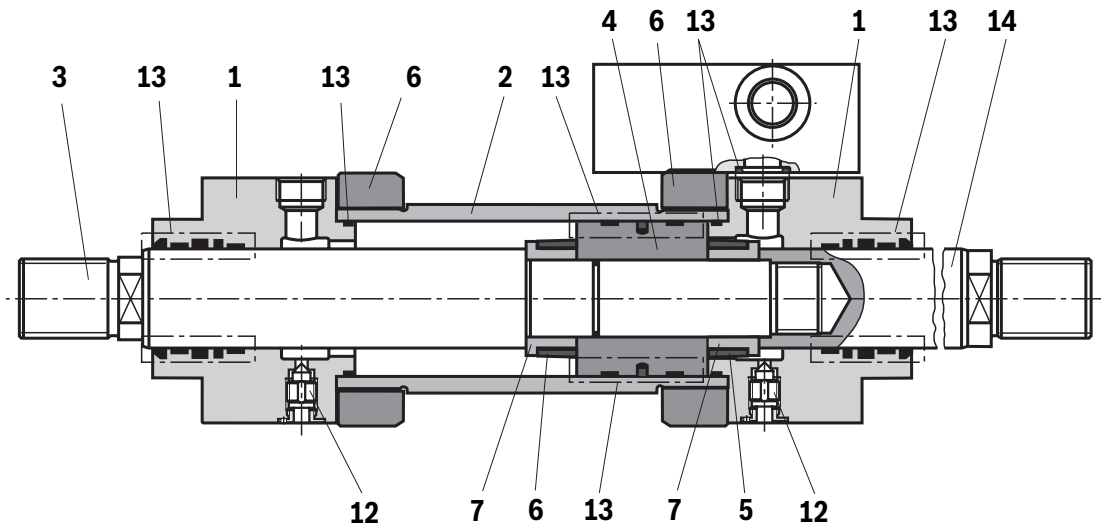

Piston rod


Piston

Seal "M" and "V"
 Piston Ø (Ø AL) 25 and 32


Seal "M" and "V"
 Piston Ø (Ø AL) 40 ... 200

Seal "T" and "S"

Seal "A"

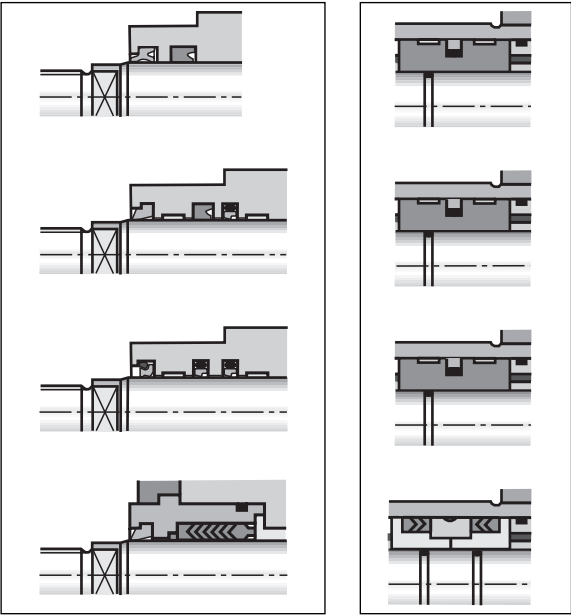

- 1 Head
- 2 Pipe
- 3 Piston rod
- 4 Piston
- 5 Damping bush
- 6 Flange
- 7 Socket
- 8 Round flange MF3
- 9 Rectangular flange MF1
- 10 Trunnion mounting MT4
- 11 Foot MS2
- 12 Bleeding
- 13 Seal kit.
Wiper
Rod seal
Piston seal
Seal ring
O-ring
Support ring
Guide ring
- 14 Piston rod

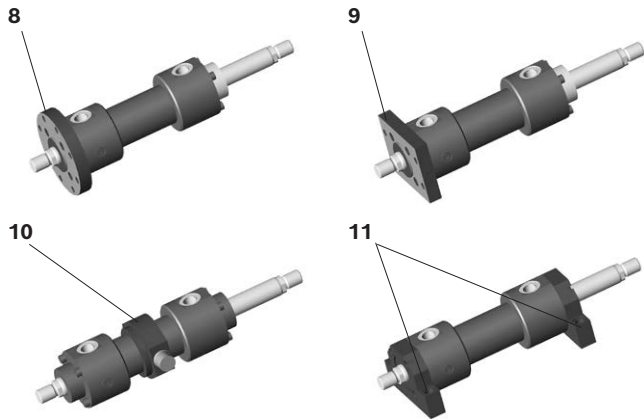

Seal kits ¹⁾

ØAL	ØMM	Material no. for seal design				
		"M"	"T"	"V"	"S"	"A"
25	14	R407026792	–	R407026829	–	–
	18	R407026793	–	R407026830	–	–
32	18	R407026794	–	R407026831	–	–
	22	R407026795	R407026812	R407026832	R407026849	–
40	22	R407026796	R407026813	R407026833	R407026850	–
	28	R407026797	R407026814	R407026834	R407026851	–
50	28	R407026798	R407026815	R407026835	R407026852	R407026866
	36	R407026799	R407026816	R407026836	R407026853	R407026867
63	36	R407026800	R407026817	R407026837	R407026854	R407026868
	45	R407026801	R407026818	R407026838	R407026855	R407026869
80	45	R407026802	R407026819	R407026839	R407026856	R407026870
	56	R407026803	R407026820	R407026840	R407026857	R407026871
100	56	R407026804	R407026821	R407026841	R407026858	R407026872
	70	R407026805	R407026822	R407026842	R407026859	R407026873
125	70	R407026806	R407026823	R407026843	R407026860	R407026874
	90	R407026807	R407026824	R407026844	R407026861	R407026875
160	90	R407026808	R407026825	R407026845	R407026862	R407026876
	110	R407026809	R407026826	R407026846	R407026863	R407026877
200	110	R407026810	R407026827	R407026847	R407026864	R407026878
	140	R407026811	R407026828	R407026848	R407026865	R407026879

¹⁾ Seal kits for proximity switches, separate material no., see below.

Proximity switch

ØAL	Material no. for seal design	
	"M", "T", "A"	"V", "S"
25, 32	–	–
40 ... 200	R900885938	R900885939

Subplate mounting


ØAL	Material no. for seal design	
	"M", "T", "A"	"V", "S"
40	R961006022	R961006243
50	R691006022	R961006243
63	R961006057	R961006278
80	R961006057	R961006278
100	R961006092	R961006313
125	R961006092	R961006313
160	R961006127	R961006348
200	R961006127	R961006348

ØAL = piston Ø

ØMM = piston rod Ø

Tightening torques

Screws: Head and base
(item 1 and 2)

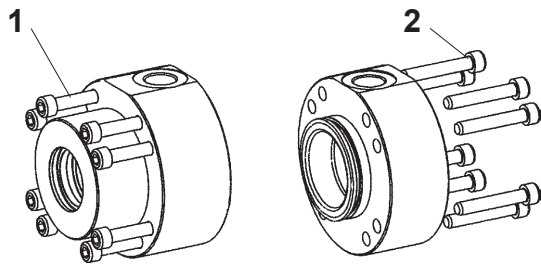

ØAL	Screw	Quantity	Quality class	Tightening torque Nm
25	M6	4	10.9	13
32	M6	4	10.9	13
40	M6	4	10.9	13
50	M8	4	10.9	30
63	M10	4	10.9	60
80	M10	8	10.9	50
100	M10	8	10.9	60
125	M12	12	10.9	100
160	M12	16	10.9	100
200	M16	16	10.9	200

Priming / painting

Priming | By default, hydraulic cylinders are primed with a coating (color gentian blue RAL 5010) of min. 40 µm. Other colors on request.

With hydraulic cylinders and attachment parts, the following surfaces are not primed:

- ▶ All fit diameters to the customer side
- ▶ Sealing surfaces for line connection
- ▶ Sealing surfaces for flange connection
- ▶ Connection surface for valve mounting
- ▶ Inductive proximity switches
- ▶ Measuring coupling
- ▶ Spherical- / plain bearing
- ▶ Grease nipples

Notice:

Surfaces not primed or painted are protected with solvent-free corrosion protection agent. Accessories ordered as a separate order item are not primed or painted by default. Corresponding priming and/or painting on request.

Painting | By default, hydraulic cylinders can be ordered in the CP4 corrosivity category in the RAL colors.

With hydraulic cylinders and attachment parts, the following surfaces are not painted:

- ▶ All fit diameters and connection surfaces to the customer side
- ▶ Sealing surfaces for line connection
- ▶ Sealing surfaces for flange connection
- ▶ Connection surface for valve mounting
- ▶ Inductive proximity switches
- ▶ Measuring coupling
- ▶ Spherical- / plain bearing
- ▶ Grease nipples

Corrosivity categories

Corrosivity categories

		Requirements	Applications	
			Inside	Outside
Priming	CP3	240 h salt spray test SST (DIN EN ISO 9227) 240 h condensation water test KKT (DIN EN ISO 6270-2) Layer thickness: min. 40 µm	Field of application e. g. hall atmosphere, air humidity ≤ 60%, no thermal load.	Not suitable for outdoor exposure.
	CP4	480 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 120 µm	Unheated buildings in which there may be condensation (production rooms, storage and sport halls).	Urban and industrial atmosphere with little salt or sulfur dioxide load.
Painting	CP5	720 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 140 µm	Silo and debris facilities, chemical plants, boathouses above sea water, laundries, breweries with high humidity and medium contamination.	Industrial and coastal areas with medium salt load.
	CP6	1000 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 220 µm	Buildings or areas with almost permanent condensation and serious contamination.	Industrial areas with large humidity and aggressive atmosphere.
	CP7	1440 h salt spray test SST. (DIN EN ISO 9227) 480 h condensation water test KKT (DIN EN ISO 6270-2) Nominal layer thickness: 320 µm	Buildings or areas with almost permanent condensation and serious contamination.	Coastal and offshore areas with high salt load.

The specified resistances of the individual Rexroth classes only refer to the primed and painted cylinder areas, not, for example, to piston rods, trunnion mounting, etc.

In this connection, special measures may be necessary.

Project planning / maintenance instructions

Boundary and application conditions

- ▶ The mechanical alignment of the movement axis and thus the mounting points of hydraulic cylinder and piston rod must be ensured. Lateral forces on the guides of piston rod and piston are to be avoided. It may be necessary to consider the own weight of the hydraulic cylinder ("MP3" / "MP5" or "MT4") or the piston rod.
- ▶ The buckling length / buckling load of the piston rod and / or the hydraulic cylinder must be observed (see page 40).
- ▶ The maximum admissible stroke velocities with regard to the suitability / load of seals must be observed as must their compatibility with the properties of the hydraulic fluid (see page 45).
- ▶ The maximum admissible velocities / kinetic energies when moving into the end positions, also considering external loads, must be observed (excess pressure).
- ▶ The maximum admissible operating pressure must be complied with in any operating state of the hydraulic cylinder. Possible pressure intensification resulting from the area ratio of annulus area and piston area and possible throttling points are to be observed.
- ▶ Detrimental environmental influences, like e.g. aggressive finest particles, vapors, high temperatures, etc. as well as contamination and deterioration of the hydraulic fluid are to be avoided.

Standards

The installation dimensions and types of mounting of

the hydraulic cylinders comply with Rexroth standard.

Acceptance

Every hydraulic cylinder is tested according to Rexroth standards and following ISO 10100: 2020 with module L.

Safety instructions

For assembly, commissioning and maintenance of hydraulic cylinders, observe the operating instructions 07100-B. Service and repair work has to be performed by Bosch Rexroth AG or by personnel especially trained for this purpose. No warranty is accepted for damage as a consequence of assembly, maintenance or repair work not performed by Bosch Rexroth AG.

Check lists for hydraulic cylinders

Hydraulic cylinders the characteristics and/or application parameters of which deviate from the values specified in the data sheet can only be offered as a special version upon request. For offers, the deviations of the characteristics and / or application parameters must be described in the check lists for hydraulic cylinders (07200).

Minimum strokes

When using end position damping, the minimum stroke must also be observed, see page 43.



Notice:

This list does not claim to be complete. In case of questions regarding the compatibility with the medium or exceedance of the boundary or application conditions, please contact us.

All graphical representations in the data sheet are examples. The product supplied may therefore differ from the figure shown.

Project planning software ICS (Interactive Catalog System)

The ICS (Interactive Catalog System) is a selection and project planning aid for hydraulic cylinders. The ICS allows designers for machines and systems to quickly and reliably find the perfect hydraulic cylinder solution through logic-guided type key enquiries. This software helps to solve design and project planning tasks more quickly and efficiently. After having been guided through the product selection, the

user quickly and reliably gets the exact technical data of the selected component as well as 3D CAD data in the correct file format for all common CAD systems.

This allows users to reduce costs while increasing their competitiveness.

Online: www.boschrexroth.com/mill-type-cylinder

Notes

Bosch Rexroth AG
Industrial Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/40 30 20
my.support@boschrexroth.de
www.boschrexroth.de

© All rights reserved to Bosch Rexroth AG, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.