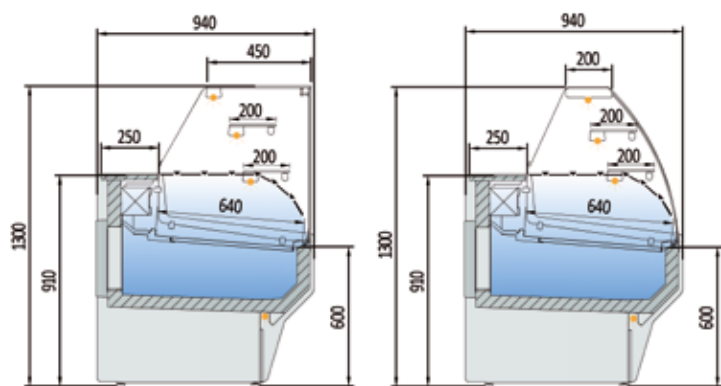
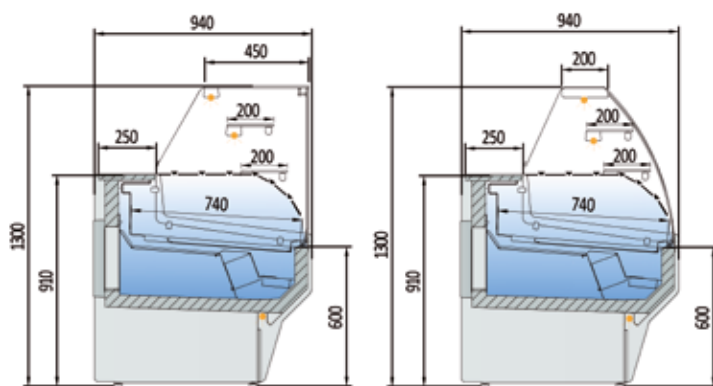


EVAPORADOR ESTÁTICO - *STATIC EVAPORATOR*

CVEP-9-10-RR
CVEP-9-13-RR
CVEP-9-15-RR
CVEP-9-20-RR
CVEP-9-25-RR
CVEP-9-30-RR

CVEP-9-10-C
CVEP-9-13-C
CVEP-9-15-C
CVEP-9-20-C
CVEP-9-25-C
CVEP-9-30-C

EVAPORADOR VENTILADO - *VENTILATED EVAPORATOR*

CVEP-9-10-RR-TF
CVEP-9-13-RR-TF
CVEP-9-15-RR-TF
CVEP-9-20-RR-TF
CVEP-9-25-RR-TF
CVEP-9-30-RR-TF

CVEP-9-10-C-TF
CVEP-9-13-C-TF
CVEP-9-15-C-TF
CVEP-9-20-C-TF
CVEP-9-25-C-TF
CVEP-9-30-C-TF

mod.	largo length (mm)	exposición display RSA (m²)	exposición display TDA (m²)RR	exposición display TDA (m²)C	cámara storage (m³)	puertas doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
CVEP-9-10	1025	0,96	0,62	0,76	299	1	565	837	R-290
CVEP-9-13	1265	1,2	0,78	0,95	376	2	572	901	R-290
CVEP-9-15	1505	1,44	0,93	1,14	452	2	781	1023	R-290
CVEP-9-20	1985	1,92	1,24	1,52	606	3	1098	1248	R-290
CVEP-9-25	2465	2,4	1,55	1,9	759	4	1284	1318	R-290
CVEP-9-30	2945	2,88	1,86	2,28	913	4	1284	1345	R-290

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Diseño especial para pastelería, con dos estantes en el plano de exposición y dos puntos de iluminación LED 4000K estándar
- Exterior e interior en chapa de acero plastificada
- Plano exposición y encimera en acero inox AISI-304
- Bandejas plano de exposición lisas
- Costados de 30 mm en ABS inyectado excepto acabado madera
- Paragolpes en la parte delantera
- Cristal frontal templado, abatible
- Dos estantes de cristal intermedios, no refrigerados
- Iluminación LED 4000K estándar: encimera superior, estante inferior y base frontal
- Opción LED 3000K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Reserva refrigerada con puertas, hueco 440x270 (excepto modelo neutro)
- **Evaporador estático o ventilado**, con tratamiento EPOXY anti-corrosión de serie
- Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
- Control electrónico de temperatura
- Indicador de temperatura
- Descarche automático
- Clase climática 4 (30°C 55%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2015

- Design focused for bakery, with two shelves at the exposure and two standard lighting
- Interior and exterior finish in plastic coated steel
- Display area and counter in stainless steel AISI-304
- Smooth deck for display area
- 30 mm sides in injected ABS, except wood decor
- Front rubber bumper
- Tempered and hinged front glass
- Two glass shelves non refrigerated
- Standard LED 4000K lighting: top worktop, shelf and front base
- Optional 3000K LED (soft light) or Fresh red, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Refrigerated under storage with doors 440x270 (except for ambient models)
- **Static evaporator or ventilated**, with anticorrosion EPOXY treated as standard
- Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
- Electronic temperature controller
- External thermometer
- Auto defrost, by heated cable as optional
- Climate class 4 (30°C 55%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2015

OPCIONES OPTIONS	decoración frontal decor	decoración total total decor	lacado alto brillo High glossy lacquered	cierre plexi plexi doors	cierre cortina night blind	luz extra LED extra lighting	Plano de exposición hermético Plane of airtight exhibition	neutra neutral	pre-inst.
CV-10									
CV-13									
CV-15									
CV-20									
CV-25									
CV-30									

Precio para opcionales montados en fábrica, no repuestos.
Price for factory-assembled options, not as spareVersión pre-instalación, incluye válvula de expansión (R449A) y válvula solenoide
REMOTE version, expansion valve (R449A) and solenoid valve, included

Vitrina expositora modular serie 9 PASTELERÍA con reserva

Serve over counter modular line 9 PASTRY with cold storage



CVEP-9-30-RR-TF



CVEP-9-15-C



panel mandos
control panel



plano de exposición
display area



perfileria anodizada
anodized profiles



estante superior NO refrigerado
not refrigerated shelf