



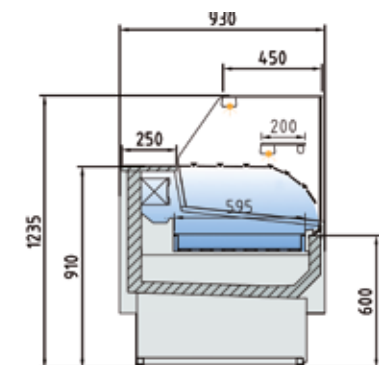


CVE-9-10-RR-P-EF
CVE-9-13-RR-P-EF
CVE-9-15-RR-P-EF
CVE-9-20-RR-P-EF
CVE-9-25-RR-P-EF

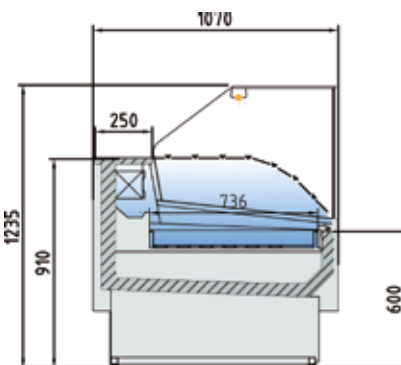


CVE-10-10-RR-P-EF
CVE-10-13-RR-P-EF
CVE-10-15-RR-P-EF
CVE-10-20-RR-P-EF
CVE-10-25-RR-P-EF

CVE-10-10-RR-P-EF-PR
CVE-10-13-RR-P-EF-PR
CVE-10-15-RR-P-EF-PR
CVE-10-20-RR-P-EF-PR
CVE-10-25-RR-P-EF-PR

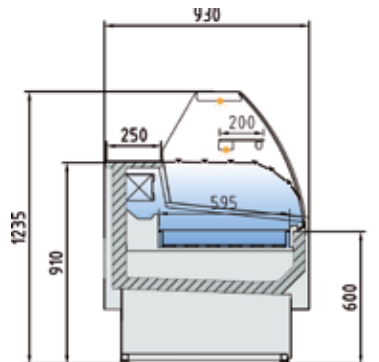

CVE-9-10-C-P-EF
CVE-9-13-C-P-EF
CVE-9-15-C-P-EF
CVE-9-20-C-P-EF
CVE-9-25-C-P-EF

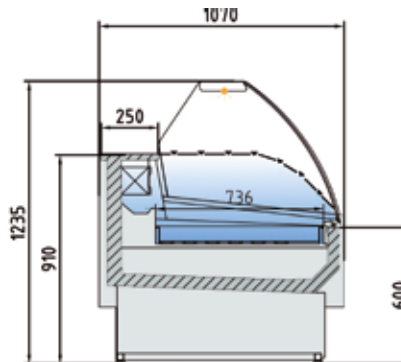

CVE-10-10-C-P-EF
CVE-10-13-C-P-EF
CVE-10-15-C-P-EF
CVE-10-20-C-P-EF
CVE-10-25-C-P-EF

CVE-10-10-C-P-EF-PR
CVE-10-13-C-P-EF-PR
CVE-10-15-C-P-EF-PR
CVE-10-20-C-P-EF-PR
CVE-10-25-C-P-EF-PR

mod.	largo length (mm)	exposición display RSA (m³)	exposición display TDA (m³)C	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
CVE-9-10-P-EF	1025	0,75	0,62	565	830	R-290
CVE-9-13-P-EF	1265	0,94	0,78	949	1065	R-290
CVE-9-15-P-EF	1505	1,13	0,93	949	1075	R-290
CVE-9-20-P-EF	1985	1,51	1,24	1284	1269	R-290
CVE-9-25-P-EF	2465	1,9	1,55	1284	1298	R-290
CVE-10-10-P-EF	1025	0,8	0,62	565	830	R-290
CVE-10-13-P-EF	1265	1	0,78	949	1065	R-290
CVE-10-15-P-EF	1505	1,21	0,93	949	1075	R-290
CVE-10-20-P-EF	1985	1,61	1,24	1284	1269	R-290
CVE-10-25-P-EF	2465	2,01	1,55	1284	1298	R-290

características técnicas y constructivas sujetas a variación sin previo aviso

- Exterior e interior en chapa de acero inoxidable
- Encimera de trabajo en acero inox AISI-316
- Plano de exposición hermético de altura 65mm, con desagüe canalizado al exterior, fabricado en acero inox. AISI-316
- Costados en acero inox de 30mm.
- Perfilera en aluminio anodizado.
- Cristal frontal templado y abatible
- **CVE-9**: Estante de cristal intermedio, no refrigerado
- Iluminación estándar: encimera superior LED
- Aislamiento de poliuretano inyectado, densidad 40 Kg/ m³, bajo GWP y cero efecto ODP
- Evaporador estático con placa fría en el plano de exposición.
- Condensación ventilada
- Control electrónico de temperatura
- Descarche automático
- Temperatura de trabajo a 25°C 60% HR ambiente, clase climática 3
- Chasis en acero acabado epoxi
- Tensión de trabajo monofásica 220V 50Hz
- **EF**: Evaporador estático + placa fría
- **CVE-10-P-EF-PR**: Modelos preinstalación incorporan valvulería solenoide y expansión en R-449A, opción R-134a

we reserve the right to change specifications without prior notice

- Exterior and interior in stainless steel sheet
- Worktop in stainless steel AISI-316
- Hermetic exposition 65mm height, with drain channeled up to the outside, made of stainless steel AISI-316
- 30mm stainless steel sides.
- Anodised aluminium profiles
- Toughened curved glass hinges forward
- **CVE-9**: glass shelf not refrigerated
- Standard lighting: top worktop LED
- 40 Kg/m³ density polyurethane insulation, low GWP and zero ODP effect
- Static evaporator and cold plate at the exposure level.
- Ventilated condensation
- Electronic temperature controller
- Automatic defrost
- Operating temperature 25°C 60% HR ambient, climatic class 3
- Working voltage single phase 220V 50Hz
- Chassis in epoxy finished steel
- **EF**: Static evaporator + cold plate
- **CVE-10-P-EF-PR**: Pre-installation models incorporate solenoid valve and expansion in R-449A, option R-134a

OPCIONES OPTIONS	cierre plexi plexi doors	cierre cortina night blind	cuerpo interior AISI-316 AISI- 316 inner structure	luz extra LED extra lighting
CVE-9/10-10-P-EF				
CVE-9/10-13-P-EF				
CVE-9/10-15-P-EF				
CVE-9/10-20-P-EF				
CVE-9/10-25-P-EF				

Precio para opcionales montados en fábrica, no repuestos.
Price for factory-assembled options, not as spare



Chasis y respaldo en acabado plastificado
Chassis and rear side on plastic finishing



CVES-10-20-RR-P-EF



CVES-10-20-C-P-EF-PR