



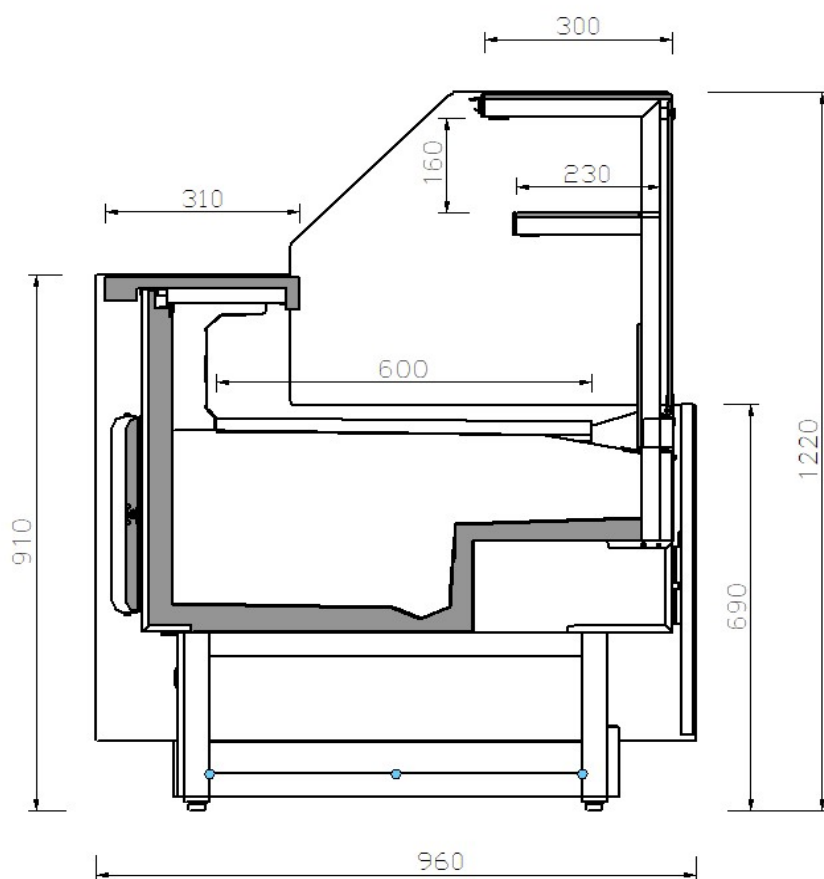

Model:
VMG_RU

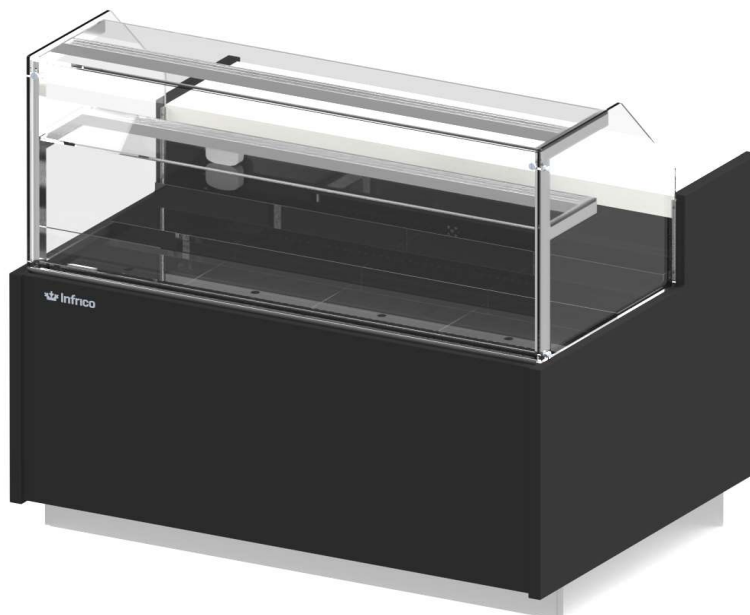


GENERAL DATA

	MODEL					
	VMG9RU	VMG12RU	VMG15RU	VMG18RU	VMG25RU	
	M2	M2	M2	M2	M2	
LENGTH (mm)	938	1250	1562	1875	2500	
SIDE WALL THICKNESS (mm)	30 + 30					
ELECTRONIC CONTRL	DIGITAL					
REFRIGERATED AREA (m ²)	0,13	0,17	0,22	0,26	0,35	
USEABLE VOLUME (lts.)	106	141	177	212	283	
WEIGHT (kg)	154	186	194	206	240	
DIMESIONS IN TRANSPORT (mm)	1430 x 1100 x 1200	1430 x 1100 x 1340	1430 x 1100 x 1735	1430 x 1100 x 2080	1430 x 1100 x 2700	

INSTALLATION DETAILS

DATA TABLE	MODEL	938	1250	1562	1875	2500
	A (mm)	303	303	303	303	303
	B (mm)	260	260	260	260	260
	C (mm)	108	108	108	108	108
	D (mm)	341	341	341	341	341
	E (mm)	500	625	781	938	1250

DRAINAGE

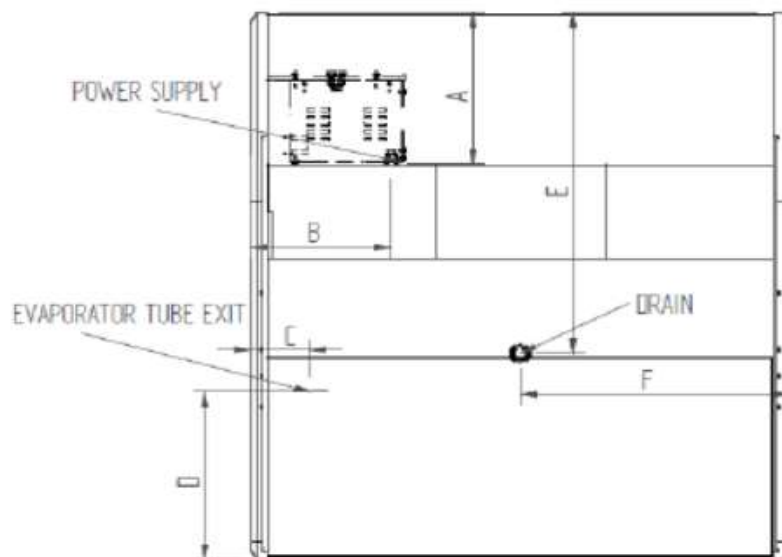

TECHNICAL CONFIGURATION

		M2 [4°C/+8°C]
INTERIOR TEMPERATURE	SET POINT	2°C
	DIFFERENTIAL	3°C
DEFROSTING SYSTEM		ELECTRICO
NUMBER OF DEFROSTS / 24h		2
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL					
		VMG9RU	VMG12RU	VMG15RU	VMG18RU	VMG25RU	
Length (mm)		938	1250	1562	1875	2500	
COMPRESSOR	N°	1	1	1	1	1	
	W	342	342	478	301	625	
	A	2,65	2,65	3,03	2,06	3,98	
REFRIGERANT	Tipo	R290					
	gr	80	80	120	140	150	
COIL FANS	N°	1	1	2	2	3	
	W	4,8	4,8	4,8	4,8	4,8	
	A	0,04	0,04	0,04	0,04	0,04	
CONDESATOR FANS	N°	1	1	2	2	2	
	W	6,7	6,7	6,7	6,7	6,7	
	A	0,03	0,03	0,03	0,03	0,03	
EVAPORATION HEATERS (*)	W	450	450	450	450	450	
	A	2	2	2	2	2	
CANOPY LIGHTING	W	32	42	53	63	77	
	A	0,14	0,19	0,24	0,29	0,35	
POWER	W	385	396	554	387	730	
	A	2,86	2,91	3,41	2,49	4,51	
ENERGY CONSUMPTION	kWh/24h	5,54	5,70	7,97	5,57	10,51	

(*) NOTE: The equipment requires two independent power points, one for the base unit and one for the evaporative tray.