


Data Sheet

Model:

VBC_SUCBCP+

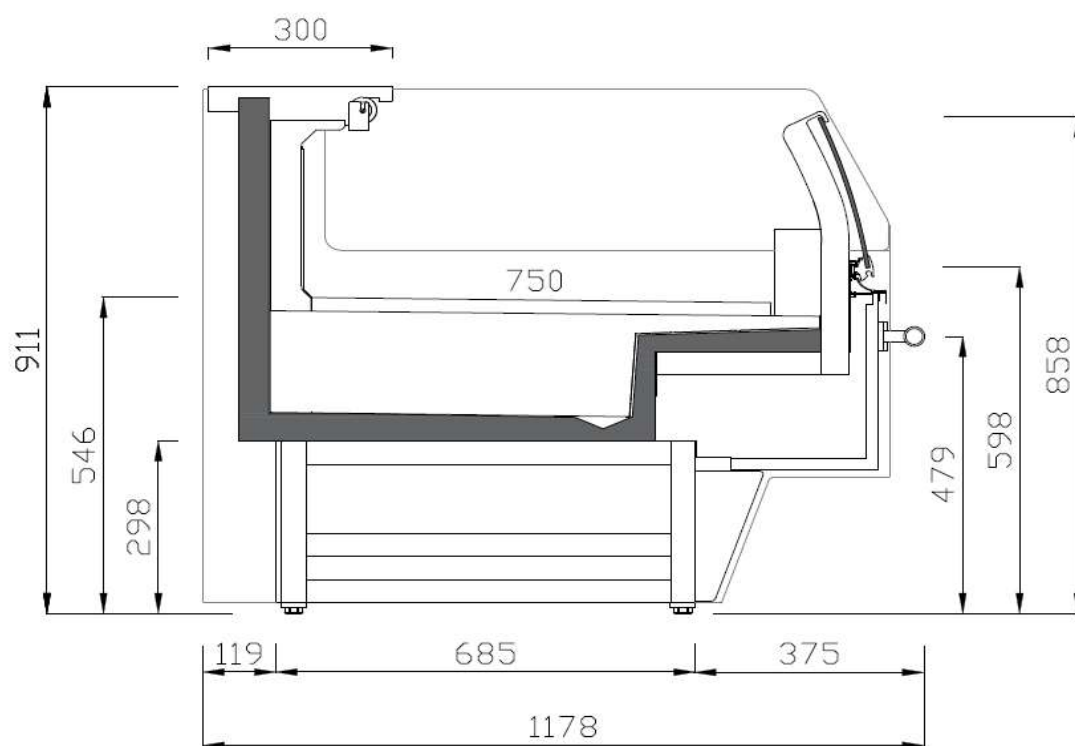

GENERAL DATA



	MODEL				
	VBC9SUCBCP+	VBC12SUCBCP+	VBC15SUCBCP+	VBC18SUCBCP+	VBC25SUCBCP+
	M1	M1	M1	M1	M1
LENGTH (mm)	938	1250	1562	1875	2500
SIDE WALL THICKNESS (mm)	30+30				
ELECTRONIC CONTRL	DIGITAL				
REFRIGERATED AREA (m ²)	0,70	0,94	1,17	1,41	1,88
USEABLE VOLUME (lts.)	141	188	234	281	375
TDA - AREA TOTAL DISPLAY (m ²)	0,74	0,99	1,23	1,48	1,97
WEIGHT (kg)	154	186	194	206	240
DIMESIONS IN TRANSPORT (mm)	1100 x 1300 x 1150	1340 x 1300 x 1150	1720 x 1300 x 1150	2030 x 1300 x 1150	2660 x 1300 x 1150

INSTALLATION DETAILS

DATA TABLE

MODELO	938	1250	1562	1875	2500
A (mm)	656,4	656,4	656,4	656,4	656,4
B (mm)	192,5	192,5	192,5	192,5	192,5
C (mm)	144,5	144,5	144,5	144,5	144,5

DRAINAGE

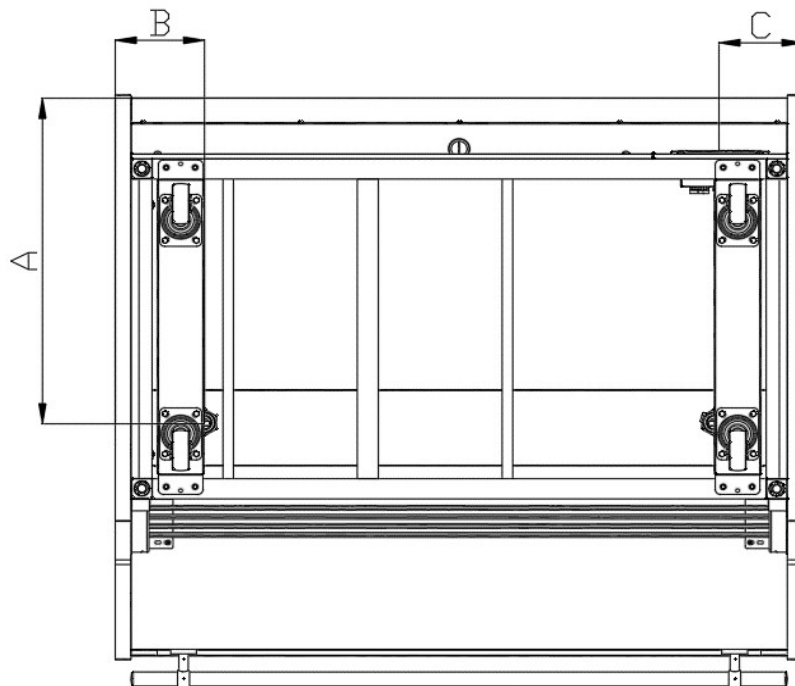

TECHNICAL CONFIGURATION

		M1 [-1°C/+5°C]
INTERIOR TEMPERATURE	SET POINT	2°C
	DIFFERENTIAL	3°C
DEFROSTING SYSTEM		NATURAL
NUMBER OF DEFROSTS / 24h		2
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		15'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	-

INSTALLATION DATA

BASE EQUIPMENT Length (mm)		MODEL				
		VBC9SCBCP+	VBC12SCBCP+	VBC15SCBCP+	VBC18SCBCP+	VBC25SCBCP+
		938	1250	1562	1875	2500
COMPRESSOR	Nº	1	1	1	1	1
	W	531	623	716	716	1077
	A	2,89	2,96	3,51	3,51	5,41
REFRIGERANT	Type	R-290				
	gr	90	140	145	145	150
COIL FANS	Nº	1	1	2	2	3
	W	4,8	4,8	4,8	4,8	4,8
	A	0,11	0,11	0,11	0,11	0,11
CONDESATOR FANS	Nº	2	2	2	2	2
	W	6,7	6,7	6,7	6,7	6,7
	A	0,425	0,425	0,425	0,425	0,425
ANTI-FOG RESISTANCE	W	39	54	69	75	90
	A	0,18	0,25	0,31	0,34	0,41
EVAPORATION TRAY	W	450	450	450	450	450
	A	2	2	2	2	2
LIGHTING	W	4,69	6,25	7,81	9,38	12,50
	A	0,02	0,03	0,04	0,04	0,06
POWER	W	593	701	816	823	1207
	A	4,05	4,19	4,93	4,96	7,06
ENERGY CONSUMPTION	kWh/24h	7,11	8,42	9,79	9,88	14,49
ENERGY EFFICIENCY CLASS	[A-G]					