


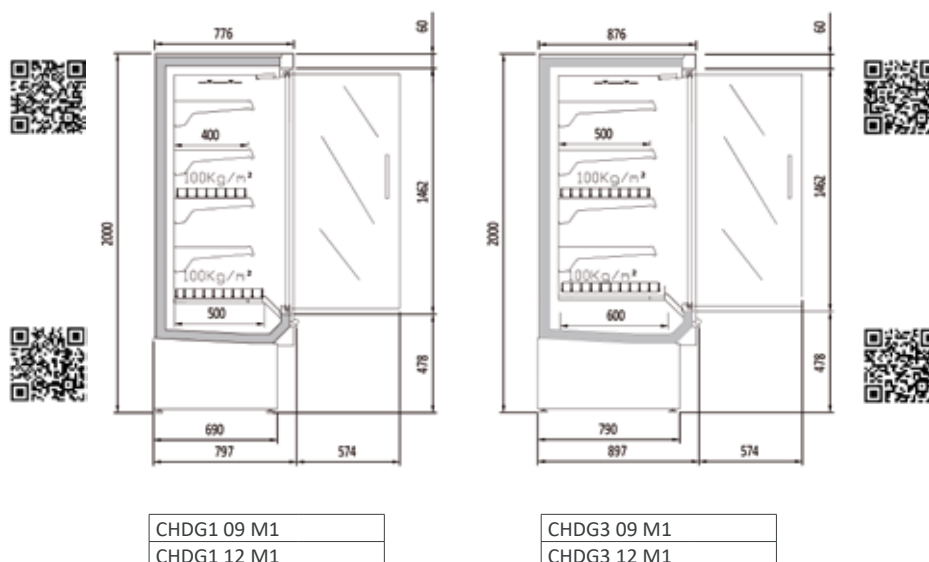

Modelo	Longitud (con costados)	Área estantes refrigerados m ²	Superficie total exposicion (TDA)	Volumen neto (L)	Estantes	Puertas	Potencia frigorífica	Consumo Kw/24h	Clase Energética	Refrigerante
Model	Length (with sides)	Refrigerated shelf area m ²	Total display area (TDA)	Net volume (L)	Shelves uds	Doors uds	Cooling capacity W	Power Kw/24h	Energy Class	Refrigerant
CHDG1 09 M1	998	2,00	1,15	549	4	2	496- 1018W	4,55	B	R-290
CHDG1 12 M1	1310	2,68	1,5	714	4	2	497- 1018W	5,4	B	R-290
CHDG3 09 M1	998	2,47	1,17	659	4	2	498- 1018W	4,55	B	R-290
CHDG3 12 M1	1310	3,30	1,52	857	4	2	499- 1018W	5,4	B	R-290

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Puertas abatibles de vidrio con serigrafía, apertura hasta 93° y bloqueo de cierre manual. Autocierre por barra de torsión
- Evaporador ventilado con recubrimiento EPOXI anticorrosión
- Estantes regulables en altura y ángulo, con portaprecios de 40 mm incluidos
- Desescarche natural del evaporador
- Bandeja de evaporación automática
- Control electrónico
- Iluminación LED 24v 4000k
- Temperatura de producto, según EN-ISO-23953:
M1: -1°+5°C, apropiado para carnes.
- Clase climática 3 (25°C, 60 H.R)
- Aislamiento de poliuretano inyectado, densidad 40kg/m3 bajo GWP y cero efecto ODP

CARACTERÍSTICAS PARTICULARES:


- Lateral exterior panorámico incluido en el precio
- Exterior lacado o inox incluido en el precio
- Interior blanco 9003 o negro 9005 incluido en el precio
- Compresor inverter de velocidad variable
- Ventiladores electrónicos
- Válvula de expansión electrónica
- Nivel sonoro modelo CHDG 09: 36 db
- Nivel sonoro modelo CHDG 12: 45 db
- Temperatura de producto, según EN-ISO-23953: M1: -1°+5°C

- *Frameless hinged doors with complete glazed frontal with serigraphy, max opening 93° with manual blocking closure. Self-closing by torsion bar*
- *Ventilated evaporator EPOXY with anticorrosive coating*
- *Adjustable shelves in height and angle, with 40 mm price holders included*
- *Natural defrost of evaporator*
- *Automatic evaporation tray*
- *Electronic control*
- *24v LED 4000k lighting*
- *Product temperature, according to EN-ISO-23953:
M1: -1°+5°C, suitable for meat*
- *Climatic class 3 (25°C, 60 H.R)*
- *Injected polyurethane insulation, density 40kg / m3 low GWP and zero ODP effect*

PARTICULAR CHARACTERISTICS:

- *Panoramic exterior side included in price*
- *Lacquered or stainless exterior included in price*
- *Interior white 9003 or black 9005 included in price*
- *Variable speed inverter compressor*
- *Electronic fans*
- *Electronic expansion valve*
- *Sound level model CHDG 09: 36 db*
- *Sound level model CHDG 12: 45 db*
- *Product temperature, according to EN-ISO-23953: M1: -1°+5°C,*





máxima eficiencia energética



max energy efficiency



componentes
baja presión sonora



low noise
components

ventiladores
electrónicos



electronic
fans

compresor
inverter



Inverter
compressor



Led vertical incluido
en precio
Vertical led included
in price

CHDG1 12 HE