



NRH-150-L



NRH-250-L



NRH-350-L



NRH-150-LI



NRH-250-LI



NRH-350-LI

mod.	rango range °C	largo length (mm)	alto height (mm)	puertas aba- tibles hinged doors	estantes shelves	capacidad latas cans capacity (33 cl.)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
NRH-150-L	+2°C +8°C	620	850	1	2	150	230V-50Hz	R134a*	140	179	-
								R290	255	200	C
NRH-250-L	+2°C +8°C	925	850	2	2	225	230V-50Hz	R134a*	304	321	-
								R290	480	351	D
NRH-350-L	+2°C +8°C	1375	850	3	2	320	230V-50Hz	R134a*	330	330	-
								R290	502	375	D

* no disponible mercado UE - not for EU market

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

NRH-L

- Exterior en acero plastificado negro
- Interior en acero plastificado gris

NRH-LI

- Exterior en acero inoxidable
- Interior en acero plastificado gris

CARACTERISTICAS COMUNES

- Diseñados para bebidas y productos envasados
- Encastrables
- Puerta con cerradura de serie
- Estantes de alambre de acero plastificado, regulables en altura
- Compresor hermético alto par de arranque
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Unidad condensadora ventilada libre de mantenimiento
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Evaporación automática del agua de descarche
- Temperatura de trabajo +2°C +8°C a 32°C ambiente
- Tensión monofásica 230V- 50 Hz

NRH-L

- Anthracite plastic coated steel exterior
- Interior gray plastic coated steel


NRH-LI

- Stainless steel exterior
- Interior gray plastic coated steel

FEATURES IN COMMON

- Designed for beverages and packaged products
- "Built-in" designed
- Door with lock as standard
- Steel wire shelves adjustable plastic height
- Hermetic compressor higher starting torque
- Forced draft evaporator system with anticorrosion coating
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Fan assisted, maintenance free condenser
- Isolation of polyurethane, density 40 Kg / m³, zero ODP and GWP
- Automatic evaporation of defrost water
- Operating temperature +2°C +8°C to 32°C ambient
- Voltage 230V - 50 Hz

OPCIONES	OPTIONS
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
estante chapa perforada 150	perforated sheet metal shelf 150
estante chapa perforada 250	perforated sheet metal shelf 250
estante chapa perforada 350	perforated sheet metal shelf 350

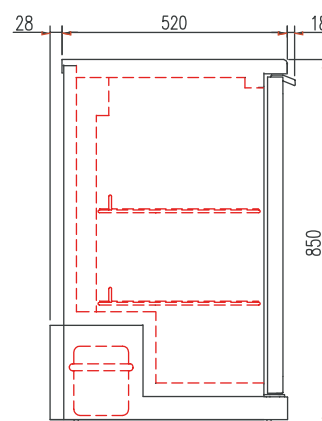



NRH-350-LI



NRH-250-LI