

SBE-150

SNACK-BAR DISPLAY COOLER

FEATURES

- Anthracite plastic coated steel exterior.
- Rear side galvanized panel.
- Interior gray plastic coated steel.
- Designed for beverages and packaged products.
- “Built-in” designed.
- Double glass on folding frame.
- Steel wire shelves adjustable plastic height.
- Hermetic compressor higher starting torque.
- Defrosting by heating element.
- Forced draft evaporator system with anticorrosion coating.
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption.
- LEDs interior lighting.
- Isolation of polyurethane, density 40 kg/m³, zero ODP and GWP.
- Adjustable feet, with supplement for height 880 mm (included).
- Automatic evaporation of defrost water.
- CC2 operating temperature (32°C 65%).






Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
1485	530	820-880	325	743	0°C +7°C	CC2	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

SBE-150

SNACK-BAR DISPLAY COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	320 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	50 mm
Exterior	Anthracite plastic coated steel
Exterior rear side	Galvanized steel
Interior	Gray plastic coated steel
Lighting	11,52
Number of shelves supplied	4
Shelf dimensions (W x D)	355 mm x 465 mm (4 Uds.)

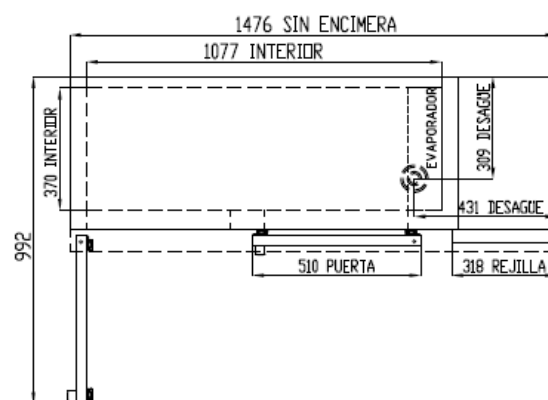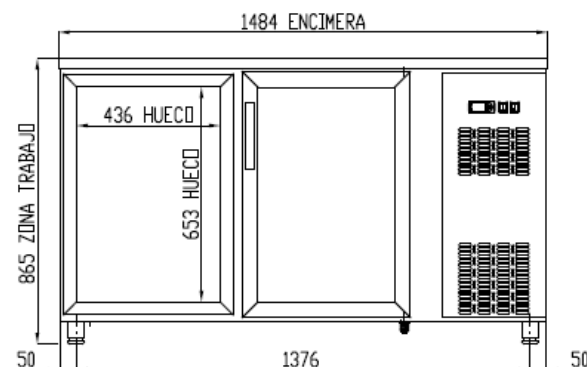

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

SBE-200

SNACK-BAR DISPLAY COOLER

FEATURES

- Anthracite plastic coated steel exterior.
- Rear side galvanized panel.
- Interior gray plastic coated steel.
- Designed for beverages and packaged products.
- “Built-in” designed.
- Steel wire shelves adjustable plastic height.
- Hermetic compressor higher starting torque.
- Defrosting by heating element.
- Forced draft evaporator system with anticorrosion coating.
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption.
- Isolation of polyurethane, density 40 kg/m³, zero ODP and GWP.
- Adjustable feet, with supplement for height 880 mm (included).
- Automatic evaporation of defrost water.
- CC2 operating temperature (32°C 65%).






Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
2025	530	820-880	490	743	0°C +7°C	CC2	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

SBE-200

SNACK-BAR DISPLAY COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	395,28 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	50 mm
Exterior	Anthracite plastic coated steel
Exterior rear side	Galvanized steel
Interior	Gray plastic coated steel
Lighting	17,28
Number of shelves supplied	6
Shelf dimensions (W x D)	355 mm x 465 mm (4 Uds.) 355 mm x 542 mm (2 Uds.)

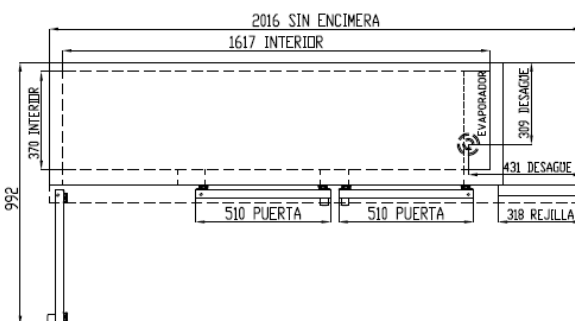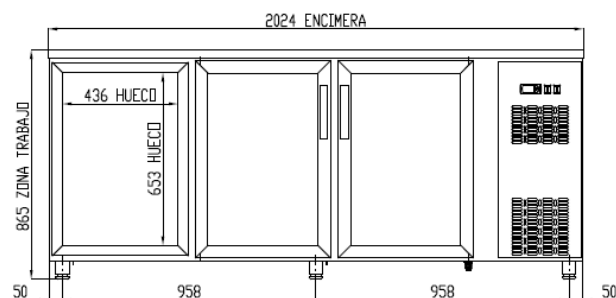

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

SBE-250

SNACK-BAR DISPLAY COOLER

FEATURES

- Anthracite plastic coated steel exterior.
- Rear side galvanized panel.
- Interior gray plastic coated steel.
- Designed for beverages and packaged products.
- “Built-in” designed.
- Double glass on folding frame.
- Steel wire shelves adjustable plastic height.
- Hermetic compressor higher starting torque.
- Defrosting by heating element.
- Forced draft evaporator system with anticorrosion coating.
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption.
- LEDs interior lighting.
- Isolation of polyurethane, density 40 kg/m³, zero ODP and GWP.
- Adjustable feet, with supplement for height 880 mm (included).
- Automatic evaporation of defrost water.
- CC2 operating temperature (32°C 65%).






Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
2565	530	820-880	650	743	0°C +7°C	CC2	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

SBE-250

SNACK-BAR DISPLAY COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	401,04 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	50 mm
Exterior	Anthracite plastic coated steel
Exterior rear side	Galvanized steel
Interior	Gray plastic coated steel
Lighting	23,04
Number of shelves supplied	8
Shelf dimensions (W x D)	355 mm x 465 mm (4 Uds.) 355 mm x 542 mm (4 Uds.)

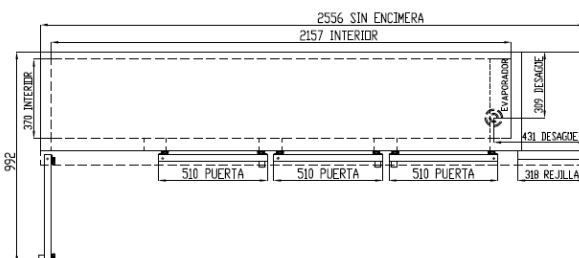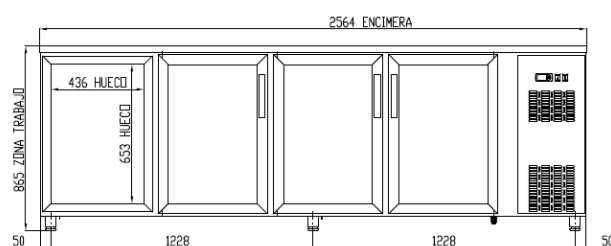

We reserve the right to change specifications without prior notice, all photos must be considered as a reference