



SBE-150



SBE-200



SBE-250



SBIE-150



SBIE-200



SBIE-250

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	capacidad latas cans capacity (33 cl.)	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
SBE/SBIE-150	0°C +7°C	1485	820-880	530	4	350	325	230V-50Hz	R290	613	331	D
SBE/SBIE-200	0°C +7°C	2025	820-880	530	6	525	490	230V-50Hz	R290	678	337	D
SBE/SBIE-250	0°C +7°C	2565	820-880	530	8	725	650	230V-50Hz	R290	743	343	D

Características técnicas y constructivas sujetas a variación sin previo aviso.

SBE

- Exterior en acero plastificado negro
- Interior en acero plastificado gris

SBIE

- Exterior en acero inoxidable
- Interior en acero plastificado gris

CARACTERISTICAS COMUNES

- Diseñados para bebidas y productos envasados
- Encastrables
- Doble cristal sobre marco abatible
- Estantes de alambre de acero plastificado, regulables en altura
- Compresor hermético alto par de arranque
- Descarche por resistencia
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Iluminación interior LEDs
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Pies regulables, con suplemento para altura 880 mm (incluido)
- Evaporación automática del agua de descarche
- Temperatura de trabajo CC2 (32°C 65%)
- Tensión monofásica 230V- 50Hz

We reserve the right to change specifications without prior notice.

SBE

- Anthracite plastic coated steel exterior
- Interior gray plastic coated steel


SBIE

- Stainless steel exterior
- Interior gray plastic coated steel

FEATURES IN COMMON

- Designed for beverages and packaged products
- "Built-in" designed
- Double glass on folding frame
- Steel wire shelves adjustable plastic height
- Hermetic compressor higher starting torque
- Defrosting by heating element
- Forced draft evaporator system with anticorrosion coating
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- LEDs interior lighting
- Isolation of polyurethane, density 40 Kg / m³, zero ODP and GWP
- Adjustable feet, with supplement for height 880 mm (included)
- Automatic evaporation of defrost water
- CC2 operating temperature (32°C 65%)
- Voltage 230V - 50Hz

OPCIONES	OPTIONS
set 6 ruedas	set 6 wheels
set 4 ruedas	set 4 wheels
estante chapa inox	SS shelf
cerradura en puerta	door lock
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
sin motor	no condenser unit

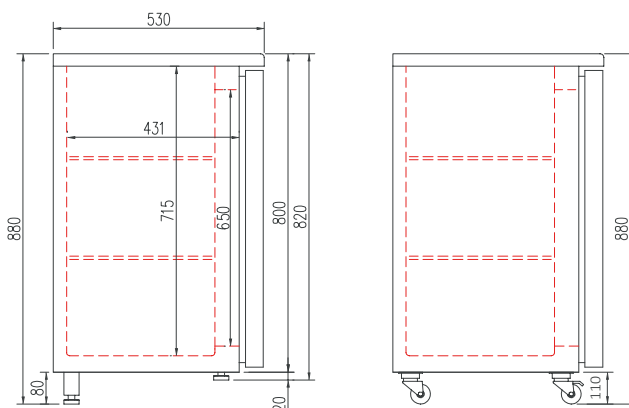



min 820 mm
max 880 mm



BAR 3



SBIE-250



SBE-250