



SB-150



SB-200



SB-250



SBI-150



SBI-200



SBI-250

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	capacidad latas cans capacity (33 cl.)	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
SBE/SBIE-150	0°C +7°C	1485	820-880	530	4	350	325	230V-50Hz	R290	613	300	D
SBE/SBIE-200	0°C +7°C	2025	820-880	530	6	525	490	230V-50Hz	R290	678	310	D
SBE/SBIE-250	0°C +7°C	2565	820-880	530	8	725	650	230V-50Hz	R290	743	320	D

Características técnicas y constructivas sujetas a variación sin previo aviso.

SB

- Exterior en acero plastificado negro
- Interior en acero plastificado gris

SBI

- Exterior en acero inoxidable
- Interior en acero plastificado gris

CARACTERISTICAS COMUNES

- Diseñados para bebidas y productos envasados
- Encastrables
- Estantes de alambre de acero plastificado, regulables en altura
- Compresor hermético alto par de arranque
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Descarche por resistencia
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, bajo GWP y cero efecto ODP
- Pies regulables, con suplemento para altura 880 mm (incluido)
- Evaporación automática del agua de descarche
- Temperatura de trabajo CC2 (32°C 65%)
- Tensión monofásica 230V- 50Hz

OPCIONES

OPCIONES	OPTIONS
set 6 ruedas	set 6 wheels
set 4 ruedas	set 4 wheels
estante chapa inox	SS shelf
cerradura en puerta	door lock
cajonera doble inox	double inox chest of drawers
cajonera doble plast negro	double black plast chest of drawers
cajonera triple inox	triple SS chest of drawers
cajonera triple plast negro	black triple plast chest of drawers
separador interior cajón	interior drawer divider
230V 60Hz / 115V 60Hz	230V 60Hz / 115V 60Hz
sin motor	no condenser unit



We reserve the right to change specifications without prior notice.

SB


- Anthracite plastic coated steel exterior
- Interior gray plastic coated steel

SBI

- Stainless steel exterior
- Interior gray plastic coated steel

FEATURES IN COMMON

- Designed for beverages and packaged products
- "Built-in" designed
- Steel wire shelves adjustable plastic height
- Hermetic compressor higher starting torque
- Defrosting by heating element
- Forced draft evaporator system with anticorrosion coating
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Isolation of polyurethane, density 40 Kg / m³, zero ODP and GWP
- Adjustable feet, with suplement for height 880 mm (included)
- Automatic evaporation of defrost water
- CC2 operating temperature (32°C 65%)
- Voltage 230V - 50Hz

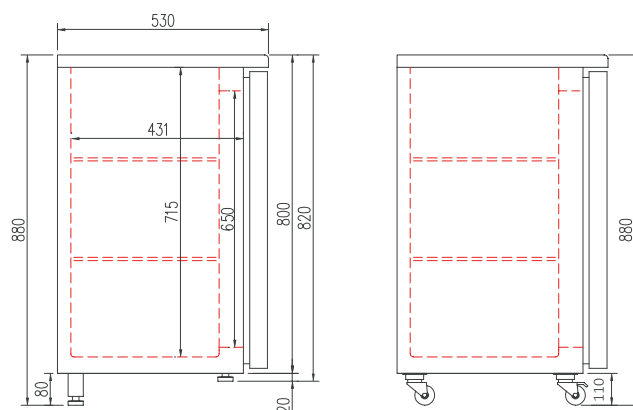



min 820 mm
max 880 mm



SB-250
con 2 kits cajones extra
with 2 extra drawers sets



SBI-200
con 3 sets cajones extra
with 3 extradrawers sets



evaporador lateral
side panel evaporator

Estantes de chapa inox, opcional
Extra SS shelves