

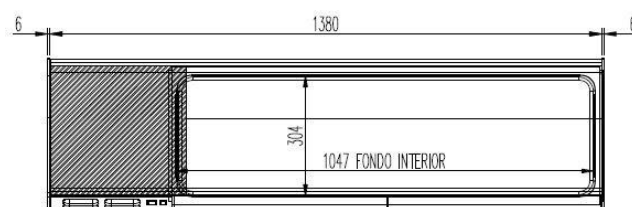


BT-6

COLD TRAY TAPAS

CHARACTERISTICS

- AISI-304 stainless steel exterior.
- AISI-304 stainless steel deep-drawn inner bottom.
- Curved tempered and securised glass.
- LED lighting.
- Transparent hinged doors.
- Height adjusters.
- Ventilated condensing unit, included in remote model (2 metres).
- Temperature setting and defrosting by digital electronic control.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.

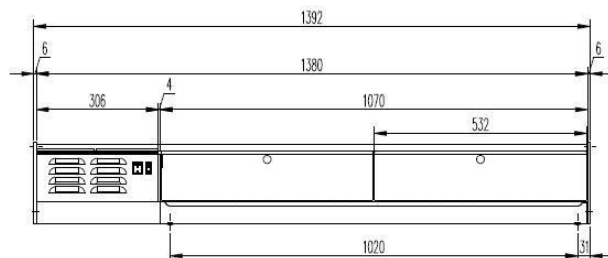

Lenght h (mm)	Depth (mm)	Height (mm)	Voltage / Frequency	Cooling capacity (W)	Nominal power (W)	Range	Class climate	Coolant
1400	385	200	230V 50/60Hz	140	330	+4°C +8°C	4 (30°C 55%RH)	R-134a

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CORECO S.A. Ctra. Cordoba - Malaga Km. 80,800

Tlfs: +34957 502275 Fax: +34957 5142 98

14900 LUCENA (Córdoba), Spain

info@coreco.es



www.coreco.es

BT-8

COLD TRAY TAPAS

CHARACTERISTICS

- AISI-304 stainless steel exterior.
- AISI-304 stainless steel deep-drawn inner bottom.
- Curved tempered and securised glass.
- LED lighting.
- Transparent folding doors.
- Height adjusters.
- Ventilated condensing unit, included in remote model (2 metres).
- Temperature setting and defrosting by digital electronic control.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.

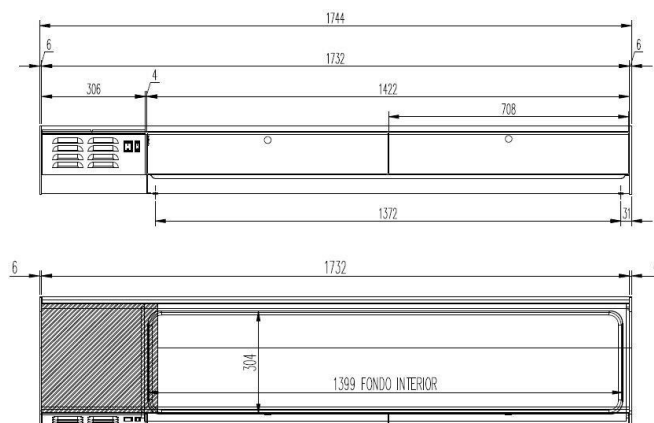

Lenght h (mm)	Depth (mm)	Height (mm)	Voltage / Frequency	Cooling capacity (W)	Nominal power (W)	Range	Class climate	Coolant
1750	385	200	230V 50/60Hz	140	330	+4°C +8°C	4 (30°C 55%RH)	R-134a

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CORECO S.A. Ctra. Cordoba - Malaga Km. 80,800

Tlfs: +34957 502275 Fax: +34957 5142 98

14900 LUCENA (Córdoba), Spain

info@coreco.es

www.coreco.es