

BE-100-I

CHEST BOTTLE COOLER

CARACTERÍSTICAS

- Stainless steel exterior.
- Rear side galvanized panel.
- Stainless steel interior.
- Stainless steel sliding doors.
- Stainless steel worktop.
- Plasticized steel wire internal dividers.
- Removable and fan assisted condenser unit.
- Static evaporator.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Mechanic control of temperature.







Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
1010	550	850	270	255	+2°C +8°C	5 (40°C 40%HR)	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-100-I

CHEST BOTTLE COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	150 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	40 mm
Exterior	Stainless steel exterior
Exterior rear side	Galvanized steel
Interior	Stainless steel interior
Lighting	No
Number of shelves supplied	1
Shelf dimensions (W x D)	-

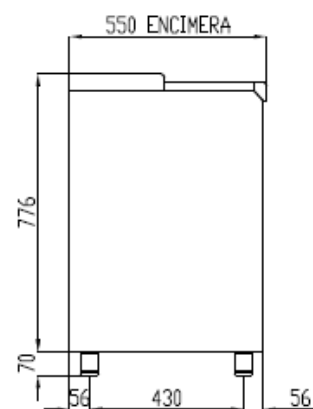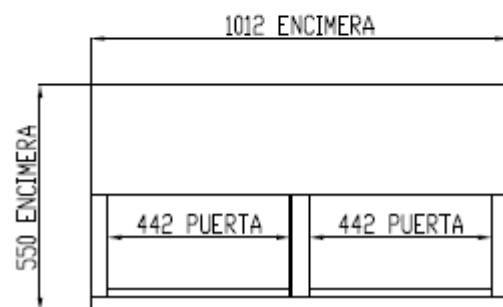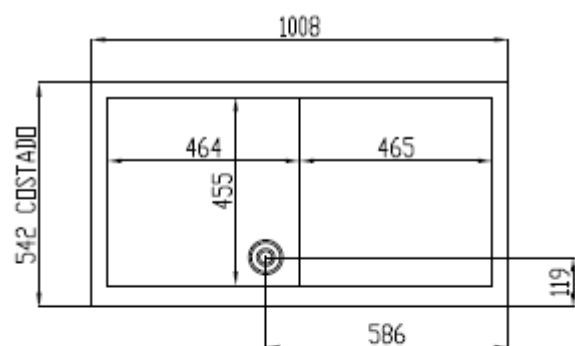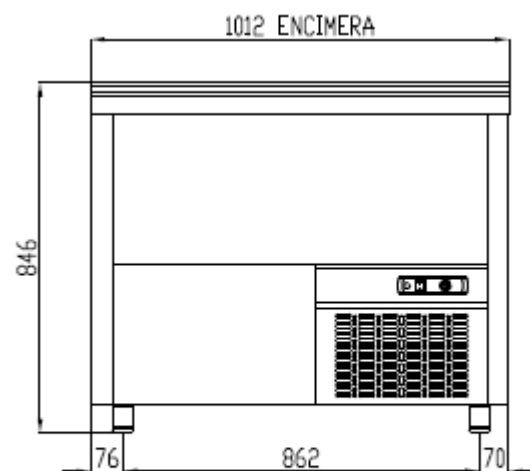

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-150-I

CHEST BOTTLE COOLER

CARACTERÍSTICAS

- Stainless steel exterior.
- Rear side galvanized panel.
- Stainless steel interior.
- Stainless steel sliding doors.
- Stainless steel worktop.
- Plasticized steel wire internal dividers.
- Removable and fan assisted condenser unit.
- Static evaporator.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Mechanic control of temperature.




Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
1500	550	850	420	255	+2°C +8°C	5 (40°C 40%HR)	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-150-I

CHEST BOTTLE COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	155 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	40 mm
Exterior	Stainless steel exterior
Exterior rear side	Galvanized steel
Interior	Stainless steel interior
Lighting	No
Number of shelves supplied	2
Shelf dimensions (W x D)	-

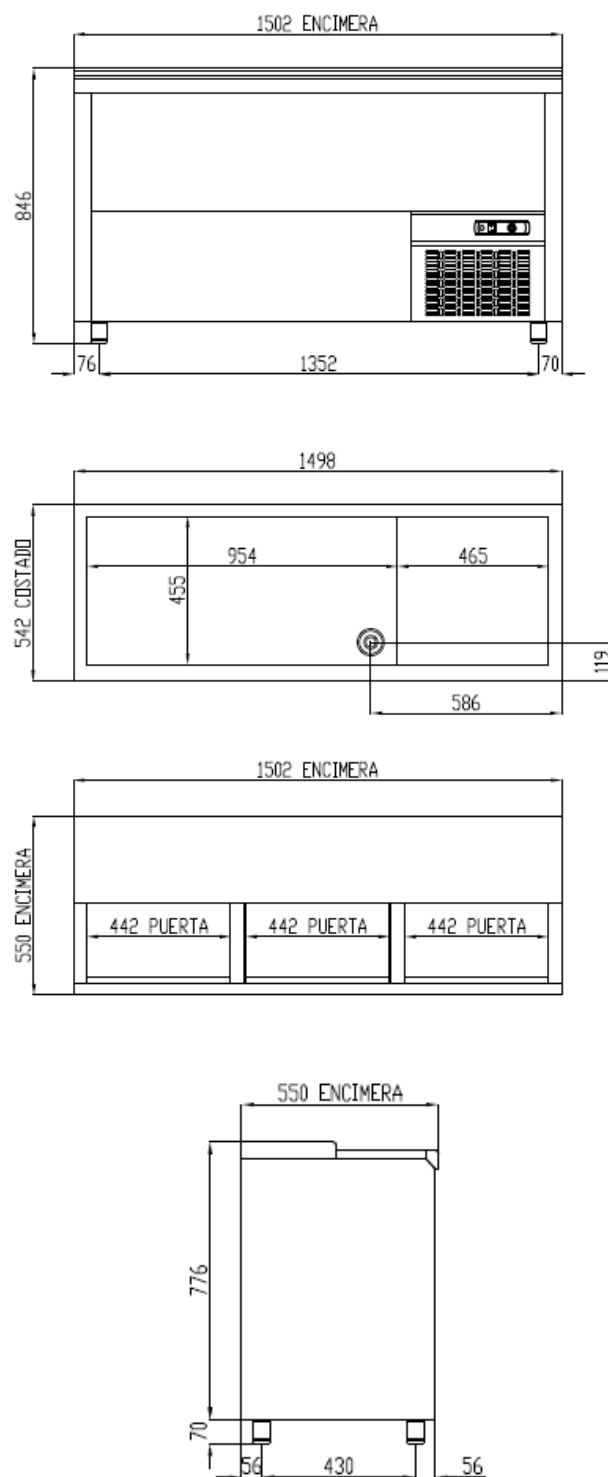

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-200-I

CHEST BOTTLE COOLER

CARACTERÍSTICAS

- Stainless steel exterior.
- Rear side galvanized panel.
- Stainless steel interior.
- Stainless steel sliding doors.
- Stainless steel worktop.
- Plasticized steel wire internal dividers.
- Removable and fan assisted condenser unit.
- Static evaporator.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Mechanic control of temperature.




Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
1990	550	850	580	255	+2°C +8°C	5 (40°C 40%HR)	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-200-I

CHEST BOTTLE COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	160 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	40 mm
Exterior	Stainless steel exterior
Exterior rear side	Galvanized steel
Interior	Stainless steel interior
Lighting	No
Number of shelves supplied	3
Shelf dimensions (W x D)	-

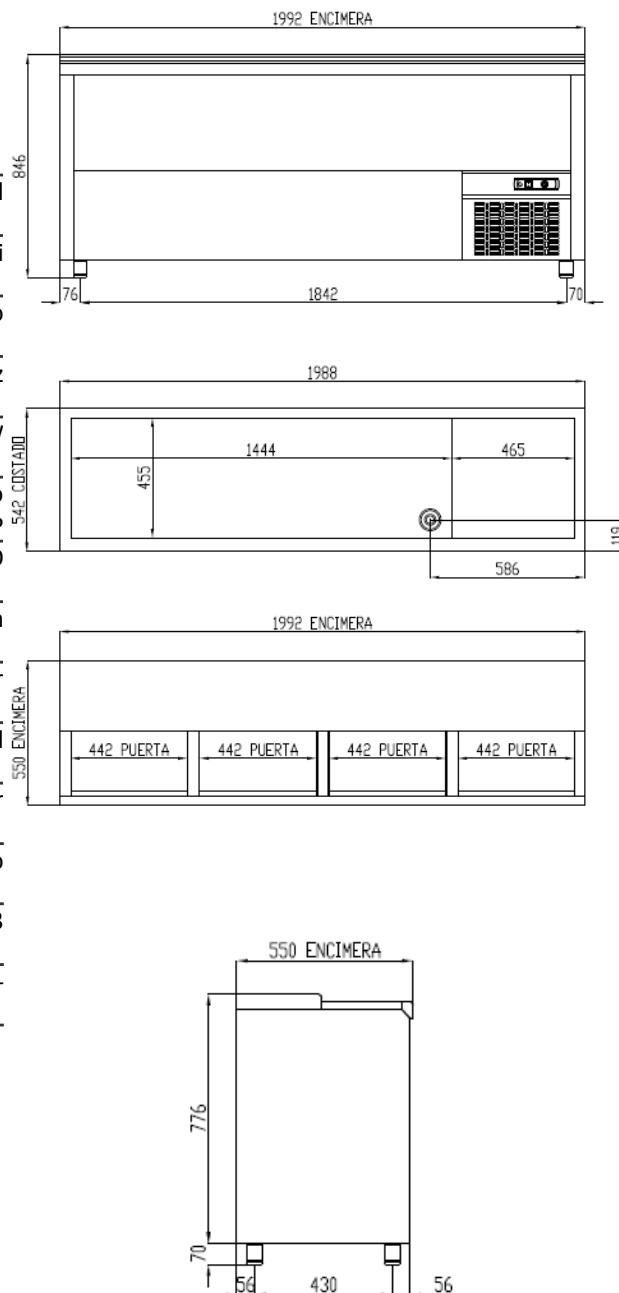

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-250-I

CHEST BOTTLE COOLER

CARACTERÍSTICAS

- Stainless steel exterior.
- Rear side galvanized panel.
- Stainless steel interior.
- Stainless steel sliding doors.
- Stainless steel worktop.
- Plasticized steel wire internal dividers.
- Removable and fan assisted condenser unit.
- Static evaporator.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Mechanic control of temperature.







Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
2480	550	850	720	488	+2°C +8°C	5 (40°C 40%HR)	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-250-I

CHEST BOTTLE COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	242 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	40 mm
Exterior	Stainless steel exterior
Exterior rear side	Galvanized steel
Interior	Stainless steel interior
Lighting	No
Number of shelves supplied	4
Shelf dimensions (W x D)	-

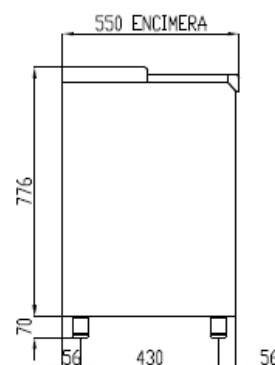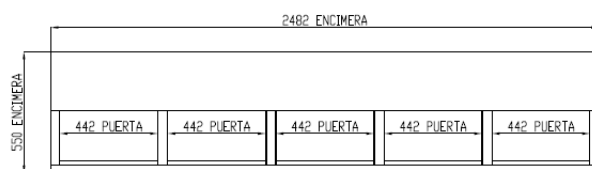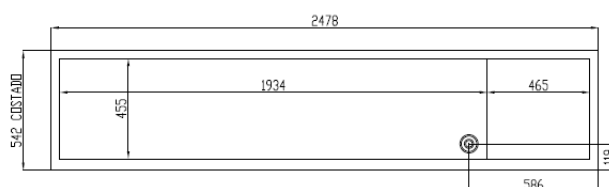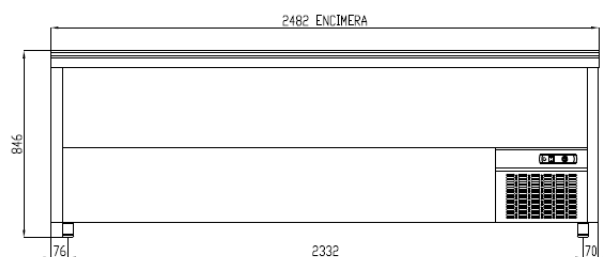

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-300-I

CHEST BOTTLE COOLER

CARACTERÍSTICAS

- Stainless steel exterior.
- Rear side galvanized panel.
- Stainless steel interior.
- Stainless steel sliding doors.
- Stainless steel worktop.
- Plasticized steel wire internal dividers.
- Removable and fan assisted condenser unit.
- Static evaporator.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Mechanic control of temperature.




Largo (mm)	Fondo (mm)	Alto (mm)	Capacidad (L)	Potencia frigorífica (W)	Rango	Clase climática	Refrigerante
2970	550	850	860	488	+2°C +8°C	5 (40°C 40%HR)	R-290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

BE-300-I

CHEST BOTTLE COOLER

Temperature control	Digital
Evaporator	Bloque aleteado epoxi
Condenser	Bloque aleteado
Voltage / Frequency	230V / 50Hz
Nominal power	270 W
Insulation material	Poliuretano, densidad 40 kg/m ³ , cero ODP y GWP
Foaming agent	HFO
Insulation thickness	40 mm
Exterior	Stainless steel exterior
Exterior rear side	Galvanized steel
Interior	Stainless steel interior
Lighting	No
Number of shelves supplied	5
Shelf dimensions (W x D)	-

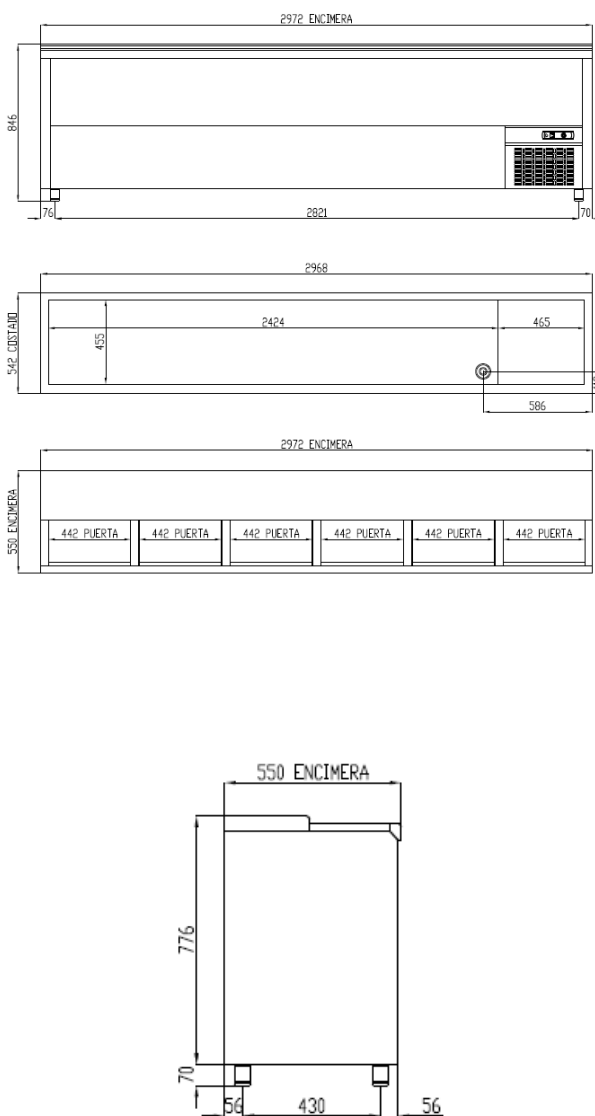

We reserve the right to change specifications without prior notice, all photos must be considered as a reference