

NR-140

ESCARCHACOPA

S

CHARACTERISTICS

- AISI-304 stainless steel exterior.
- Galvanised sheet steel backrest.
- Stainless steel interior, with curved edges and recessed bottom.
- Reversible opening door, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- AISI-304 stainless steel worktop.
- Inner shelves of plastic-coated steel wire, height adjustable.
- Height-adjustable supports.
- Ventilated condensing unit.
- Evaporator system draught forced draught, with coating anti-corrosion epoxy coating.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.



Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
645	640	805	125	225	-2°C +8°C	S (40°C 40%RH)	R-290




Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

NR-140

ESCARCHACOPA

S

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Coolant	R-290
Voltage	230V 50Hz
Rated power	165 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	40 mm
Exterior	AISI-304 stainless steel
External backrest	Galvanised steel
Inside	AISI-304 stainless steel
Light	No
Number of shelves	2, plastic-coated steel
Shelf dimensions (W x D)	525 x 440 mm (2 pcs.)

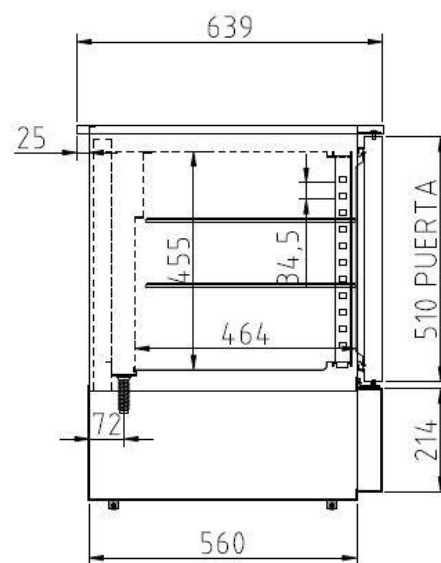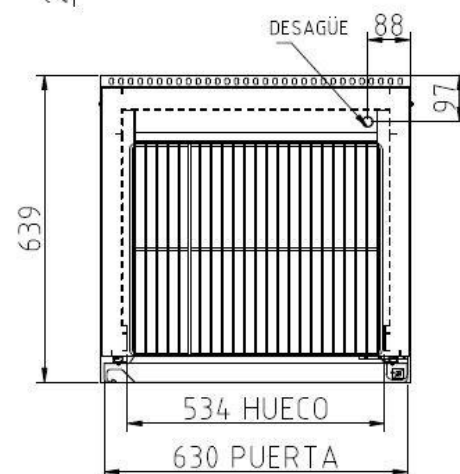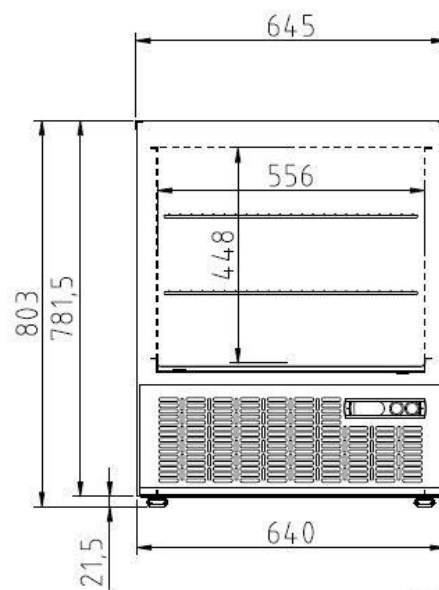

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.