

NRE-140

ESCARCHACOPAS

CHARACTERISTICS

- Stainless steel exterior.
- Galvanised sheet steel backrest.
- Stainless steel interior with curved edges and recessed bottom.
- Reversible opening door, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- Stainless steel worktop.
- LED interior light.
- Inner shelves of plastic-coated steel wire, height adjustable.
- Height-adjustable supports.
- Ventilated condensing unit.
- Forced draught system evaporator, with anti-corrosion epoxy coating.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.




Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class Climate	Coolant
645	640	805	125	255	-2°C +8°C	S (40°C 40%RH)	R290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

NRE-140

ESCARCHACOPAS

Temperature control	Digital
Evaporator	Epoxy finned block
Voltage / Frequency	230V / 50Hz
Rated power	169 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	50 mm
Outside	Stainless steel
External backrest	Galvanised steel
Inside	Stainless steel
Light	Led
Number of shelves	2
Shelf dimensions (W x D)	528 mm x 440 mm

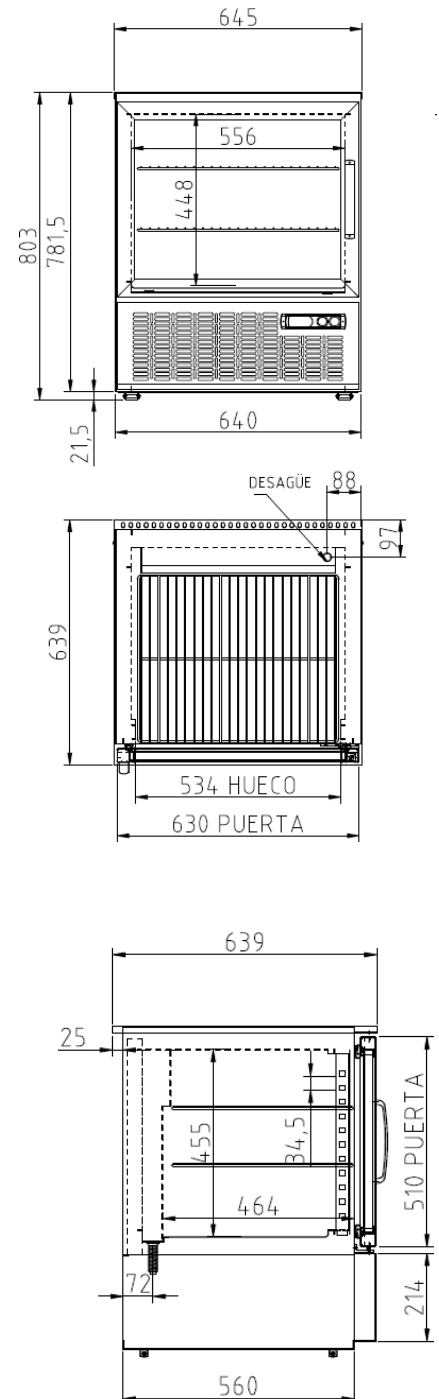

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.