

DPE-140

FISH DEPARTMENT

CHARACTERISTICS

- AISI-304 stainless steel exterior.
- Galvanised sheet steel backrest.
- AISI-304 stainless steel interior with curved edges and deep-drawn bottom, GN 1/1 compatible.
- Reversible opening doors, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- AISI-304 stainless steel worktop.
- Plastic containers 530x460 on stainless steel rails.
- Height-adjustable supports.
- Ventilated condensing unit.
- Forced draught system evaporator, with anti-corrosion epoxy coating.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.




Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
645	640	800	125	225	-5°C -1°C	S (40°C 40%RH)	R-290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

DPE-140

FISH DEPARTMENT

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Voltage / Frequency	230V / 50Hz
Rated power	191 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	40 mm
Outside	AISI-304 stainless steel
External backrest	Galvanised steel
Inside	AISI-304 stainless steel
Light	Led
Number of containers	3
Shelf dimensions (W x D x H)	530 mm x 460 mm x 100 mm

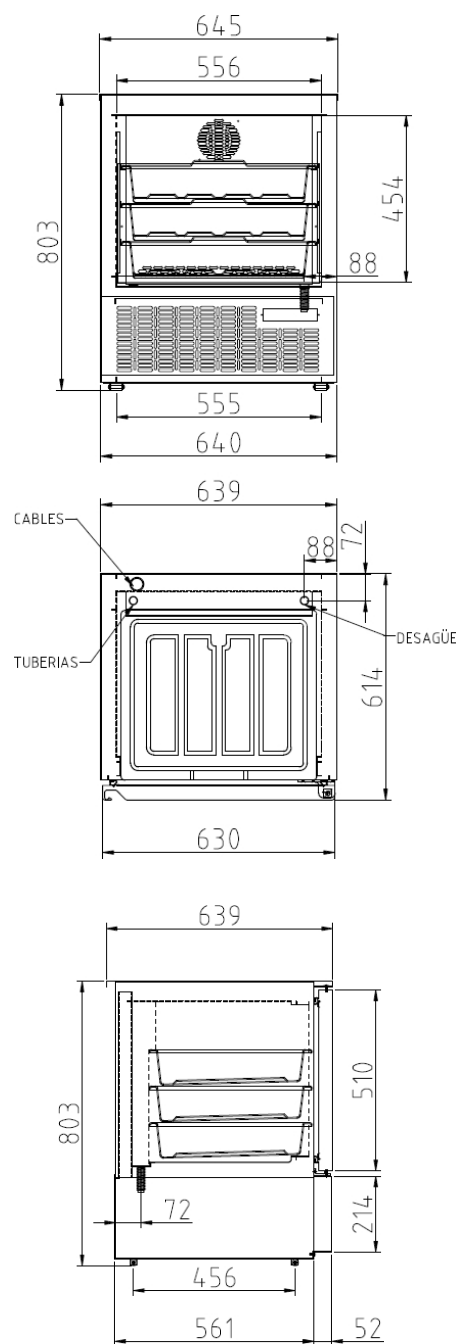

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.