

EBRW-2003-NI

REFRIGERATED WINE DISPLAY CABINET

FEATURES

- Black plastic coated exterior.
- Rear side in galvanized panel.
- Stainless steel interior.
- Double glazed door with self closing system, blocked opening and magnetic gasket.
- 3000K double LED interior lighting.
- AISI-304 shelves with wooden front, tiltable 20°.
- Key lock as standard.
- Height adjustable feet.
- Ventilated condensing unit.
- Evaporator forced draft system, with anti-corrosion epoxy coating.
- Forced draft fans stop when the door is opened.
- Automatic evaporation of defrost water.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Digital temperature and humidity control, optimized defrost, open door alarm and high condensation temperature alarm. Efficient management of energy consumption.






Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling power (W)	Range	Climatic class	Coolant
2055	745	2055	1852	1814	+2°C +18°C	4 (30°C 55%HR)	R290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

EBRW-2003-NI

REFRIGERATED WINE DISPLAY CABINET

Temperature control	Digital
Evaporator	Epoxy finned block
Condenser	Finned block
Voltage / Frequency	230V / 50Hz
Nominal power	1726 W
Insulation material	Polyurethane, 40 kg/m ³ density, zero ODP and GWP
Foaming agent	HFO
Insulation thickness side	70 mm
Exterior	Black plastic coated
Exterior rear side	Galvanized steel
Interior	Stainless steel
Lighting	Led
Number of shelves supplied	18
Shelves dimensions (W x D)	520 mm x 470 mm (18 Uds.)
Bottle capacity	315

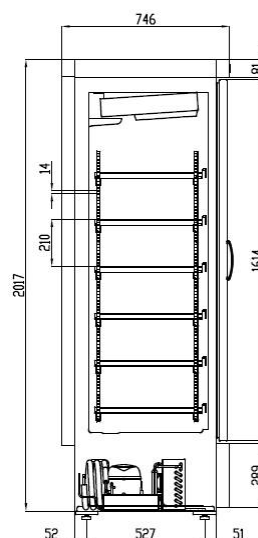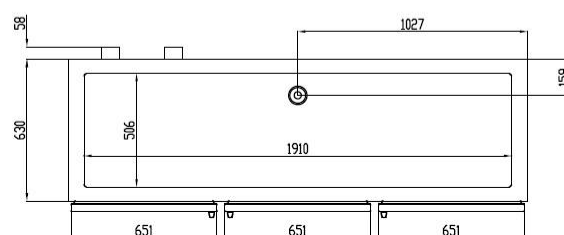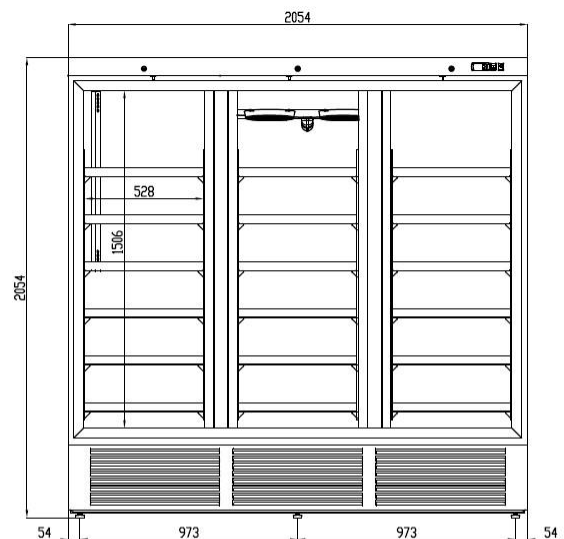

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

EBRW-2003-NN

REFRIGERATED WINE DISPLAY CABINET

FEATURES

- Black plastic coated exterior.
- Rear side in galvanized panel.
- Black plastic coated interior.
- Double glazed door with self closing system, blocked opening and magnetic gasket.
- 3000K double LED interior lighting.
- AISI-304 shelves with wooden front, tiltable 20°.
- Key lock as standard.
- Height adjustable feet.
- Ventilated condensing unit.
- Evaporator forced draft system, with anti-corrosion epoxy coating.
- Forced draft fans stop when the door is opened.
- Automatic evaporation of defrost water.
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP.
- Digital temperature and humidity control, optimized defrost, open door alarm and high condensation temperature alarm. Efficient management of energy consumption.






Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling power (W)	Range	Climatic class	Coolant
2055	745	2055	1852	1814	+2°C +18°C	4 (30°C 55%HR)	R290

We reserve the right to change specifications without prior notice, all photos must be considered as a reference

EBRW-2003-NN

REFRIGERATED WINE DISPLAY CABINET

Temperature control	Digital
Evaporator	Epoxy finned block
Condenser	Finned block
Voltage / Frequency	230V / 50Hz
Nominal power	1726 W
Insulation material	Polyurethane, 40 kg/m ³ density, zero ODP and GWP
Foaming agent	HFO
Insulation thickness side	70 mm
Exterior	Black plastic coated
Exterior rear side	Galvanized steel
Interior	Black plastic coated
Lighting	Led
Number of shelves supplied	18
Shelves dimensions (W x D)	520 mm x 470 mm (18 Uds.)
Bottle capacity	315

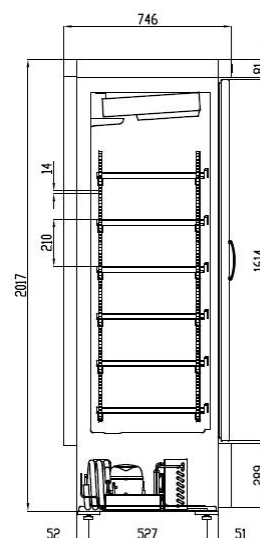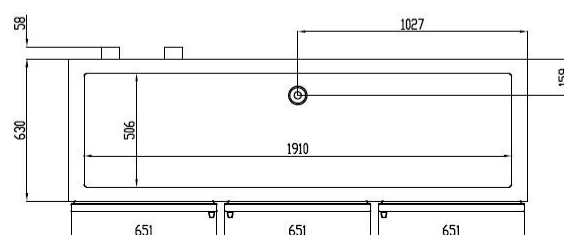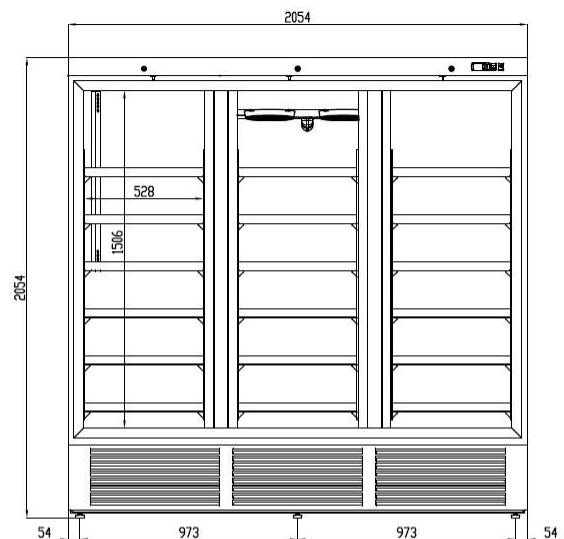

We reserve the right to change specifications without prior notice, all photos must be considered as a reference