

CVC-751-NB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

CHARACTERISTICS

- Black plastic-coated steel exterior.
- White plastic-coated aluminium interior.
- Stainless steel deep-drawn inner bottom.
- Galvanised sheet steel backrest.
- Triple glass doors with automatic closing system and magnetic seal (stays open beyond 90° of opening).
- LED interior light.
- Lacquered steel interior shelves, height adjustable with shelf-type supports and price-holder band.
- Height adjusters.
- Removable control panel and engine ventilation grille.
- Ventilated condensing unit.
- Evaporator system curtain from air curtain system, with coating anti-corrosion epoxy coating.
- Forced draught fan stop when opening the door.
- Automatic evaporation of defrost water.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.






Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
680	870	2060	346	907	-25°C -18°C	4 (30°C 55%RH)	R-290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CVC-751-NB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Voltage / Frequency	230V / 50Hz
Rated power	791 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFC
Side insulation thickness	70 mm
Outside	Black plasticised steel
External backrest	Galvanised steel
Inside	White plastic-coated aluminium
Light	Led
Number of shelves	4
Shelf dimensions (W x D)	532 mm x 535 mm

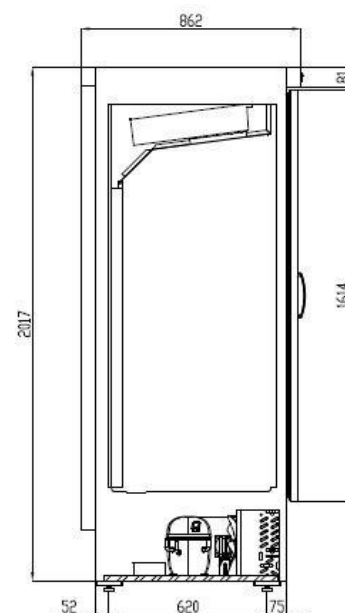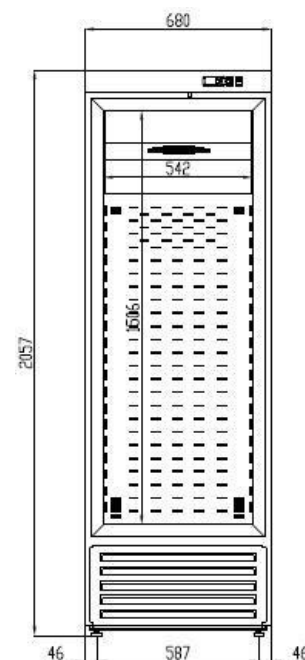

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.