

CVC-1002-NB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

CHARACTERISTICS

- Black plastic-coated steel exterior.
- White plastic-coated steel interior.
- Stainless steel inner bottom, with curved edges.
- Galvanised sheet steel backrest.
- Triple glass doors with reversible opening, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- Reinforced interior lighting with double LED strip.
- Lacquered steel interior shelves, height adjustable with brackets shelf type and price band.
- Height adjusters.
- Removable control panel and engine ventilation grille.
- Ventilated condensing unit.
- Air curtain system evaporator, with anti-corrosion epoxy coating.
- Forced draught fan stop when opening the door.
- Automatic evaporation of defrost water.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.






Length h (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
1370	870	2060	1404	1456	-25°C -18°C	4 (30°C 55%RH)	R-290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CVC-1002-NB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Coolant	R-290
Voltage	230V 50Hz
Rated power	1220 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	70 mm
Outside	Black plasticised steel
External backrest	Galvanised steel
Inside	White plasticised steel
Light	51,84 W
Number of shelves	8
Shelf dimensions (W x D)	609 x 535 mm (8 pcs.)

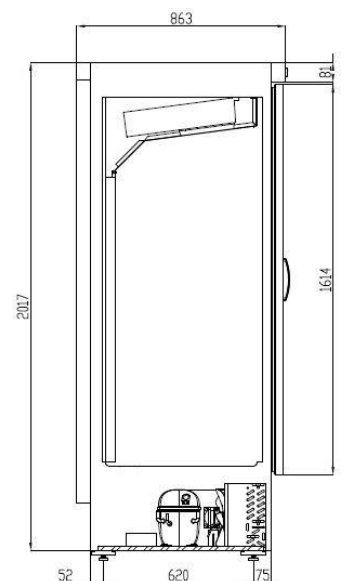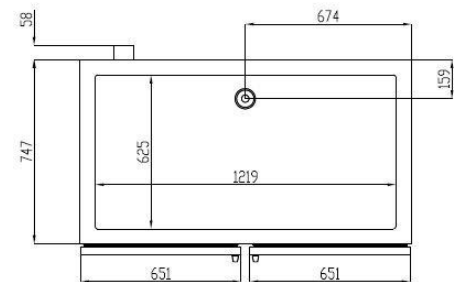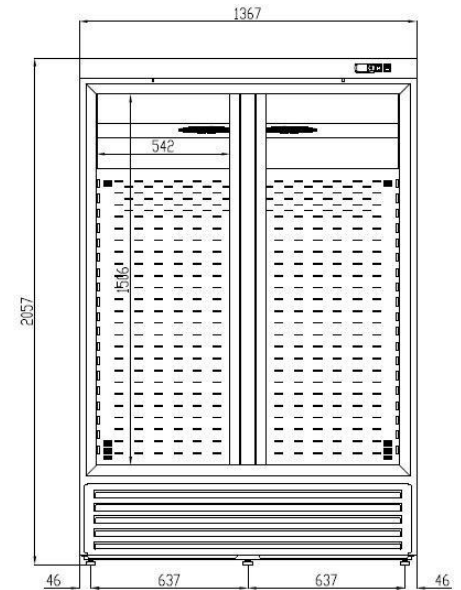

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CVC-1002-BB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

CHARACTERISTICS

- White plastic-coated steel exterior.
- White plastic-coated steel interior.
- Stainless steel inner bottom, with curved edges.
- Galvanised sheet steel backrest.
- Triple glass doors with reversible opening, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- Reinforced interior lighting with double LED strip.
- Lacquered steel interior shelves, height adjustable with brackets shelf and price-holder band.
- Height adjusters.
- Removable control panel and engine ventilation grille.
- Ventilated condensing unit.
- Air curtain system evaporator, with anti-corrosion epoxy coating.
- Forced draught fan stop when opening the door.
- Automatic evaporation of defrost water.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.






Lengt h (mm)	Depth (mm)	Heig ht (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
1370	870	2060	1404	1456	-25°C -18°C	4 (30°C 55%RH)	R-290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

CVC-1002-BB

SUPERMARKET CUPBOARD FREEZER MAINTENANCE

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Coolant	R-290
Voltage	230V 50Hz
Rated power	1220 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	70 mm
Outside	White plasticised steel
External backrest	Galvanised steel
Inside	White plasticised steel
Light	51,84 W
Number of shelves	8
Shelf dimensions (W x D)	609 x 535 mm (8 pcs.)

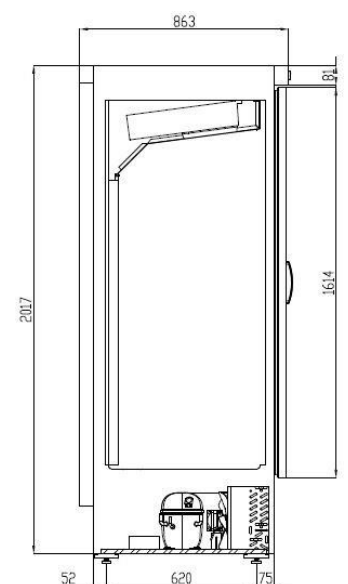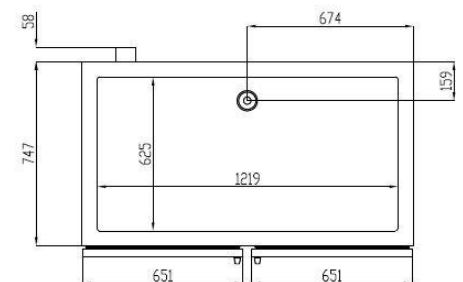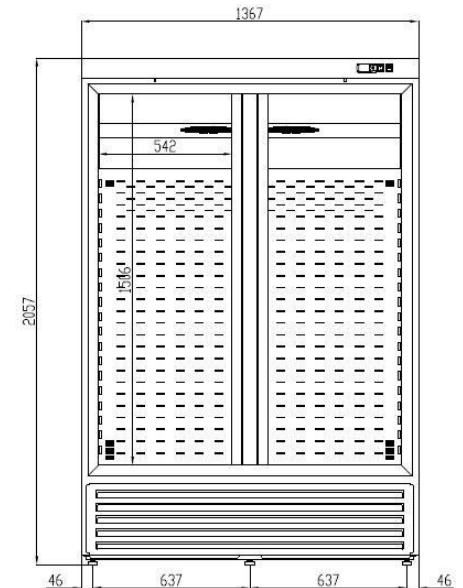

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.