



CEVRF-430



CEVRV-430



CEVRVB-430



mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	capacidad capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
CEVRV-430	0°C +7°C	430	1815	510	4	200	230V-50Hz	R600a	205	164	C
CEVRB-430	0°C +7°C	430	1815	510	4	212	230V-50Hz	R600a	205	164	C
CEVRF-430	-16°C -18°C	430	1815	510	6	200	230V-50Hz	R290	231	233	C

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero plastificado blanco
- Puerta con doble cristal sobre marco de aluminio oculto por el vidrio
- Interior en poliestireno sanitario termo-conformado
- Control digital de temperatura y descarches
- Iluminación interior LEDs
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporación automática del agua de descarche
- Temperatura de trabajo 32°C ambiente
- Tensión monofásica 230V- 50 Hz

CEVRV: Diseñados para bebidas y productos envasados

- Estantes de alambre de acero plastificado, regulables en altura
- Evaporador ventilado impreso en placa de aluminio
- Versión SUBZERO, consultar

CEVRF: Diseñados para conservar productos congelados

- Estantes evaporador fijos

We reserve the right to change specifications without prior notice.


- White plastic coated steel exterior
- Double glass doors with exterior aluminium frame
- Interior in sanitary polystyrene thermoforming
- Designed for beverages and packaged
- Digital temperature control and defrost
- Interior LEDs lighting
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Automatic evaporation of defrost water
- Operating temperature 32°C ambient
- Voltage 230V - 50 Hz

CEVRV: Designed for beverages and packaged products


- Plastic-coated steel wire shelves, adjustable in height
- Aluminum plate printed ventilated evaporator
- SUBZERO version, consult

CEVRF: Designed for frozen products


- Fixed evaporator shelves

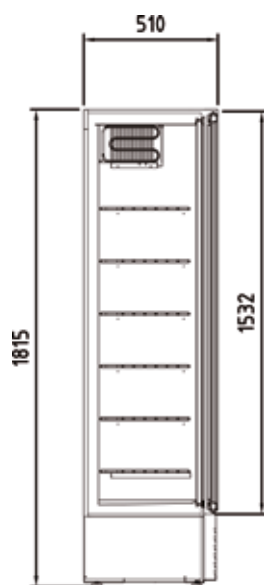

CEVRF-430

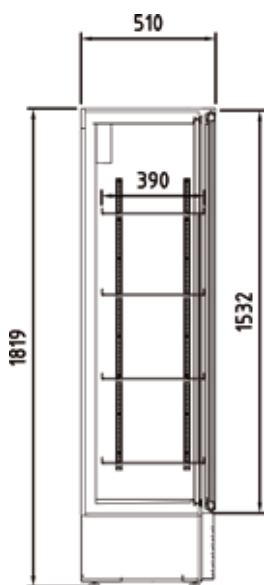

CEVRV-430

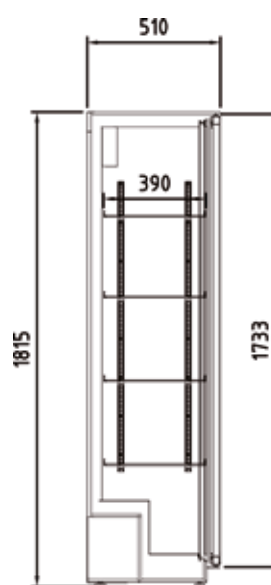

CEVRVB-430



0°C
+7°C

CEVRV / CEVRVB



CEVRV-370-V
CEVRVB-370

CEVRV-370-VC
CEVRVB-370-C

CEVRV-750
CEVRVB-750

CEVRV-750-C
CEVRVB-750-C

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	volumen bruto gross volume (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2019/2018 EN16902
CEVRV-370-V	0°C +7°C	370	1815	510	4	120	230V-50Hz	R600a	205	164	D
CEVRV-370-VC	0°C +7°C	370	1955	510	4	120	230V-50Hz	R600a	205	168	D
CEVRVB-370	0°C +7°C	370	1815	510	4	175	230V-50Hz	R600a	205	239	D
CEVRVB-370-C	0°C +7°C	370	1955	510	4	175	230V-50Hz	R600a	205	250	D
CEVRV-750	0°C +7°C	750	1815	510	4	385	230V-50Hz	R600a	205	164	D
CEVRV-750-C	0°C +7°C	750	1955	510	4	385	230V-50Hz	R600a	205	168	D
CEVRVB-750	0°C +7°C	750	1815	510	4	409	230V-50Hz	R600a	205	239	D
CEVRVB-750-C	0°C +7°C	750	1955	510	4	409	230V-50Hz	R600a	205	250	D

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior e interior en acero plastificado blanco
- Diseñados para bebidas y productos envasados
- Puerta con doble cristal sobre marco de aluminio oculto por el vidrio
- Estantes de alambre de acero plastificado, regulables en altura
- Compresor hermético alto par de arranque
- Evaporador ventilado impreso en placa de aluminio
- Control digital de temperatura y descarches
- Iluminación interior LED
- Unidad condensadora estática libre de mantenimiento
- Aislamiento de poliuretano inyectado, libre CFCs, densidad 40 Kg/m³
- Evaporación automática del agua de descarche
- Temperatura de trabajo 0°C +7°C a 32°C 65% H.R amb.
- Tensión monofásica 230V 50/60 Hz

CEVRV: Puerta cristal, rejilla delantera
CEVRV-C: Puerta cristal, rejilla delantera y canopy
CEVRB: Puerta cristal, escalón
CEVRB-C: Puerta cristal, escalón y canopy


We reserve the right to change specifications without prior notice.

- Exterior and interior in white plastic coated steel
- Designed for beverages and packaged products
- Double glass door on aluminum frame hidden by glass
- Shelves plastic coated steel wire, adjustable height
- Hermetic compressor high starting torque
- Ventilated evaporator printed on aluminum plate
- Digital temperature control and defrost
- Interior lighting LED
- Static condensing unit, maintenance-free
- Insulation: Polyurethane, without CFCs, density 40 Kg / m³
- Automatic evaporation of defrost water
- Operating temperature 0°C +7°C at 32°C 65% H.R ambient
- Voltage 230V 50/60 Hz


CEVRV: Glass door, front grille
CEVRV-C: Glass door, front grille and canopy
CEVRB: Glass door, step
CEVRB-C: Glass door, step and canopy




CEVRVB-370-C

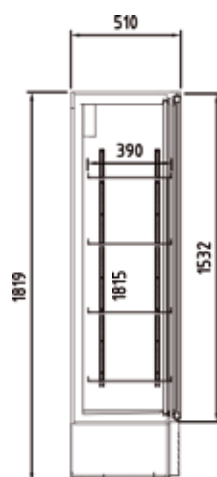


CEVRV

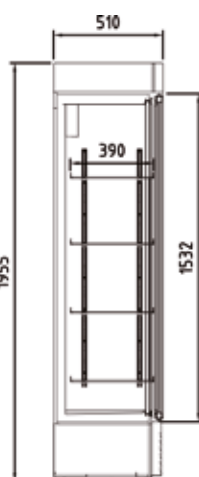

CEVRV

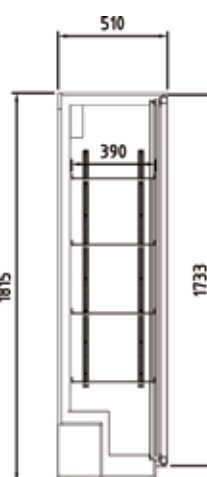

CEVRVB

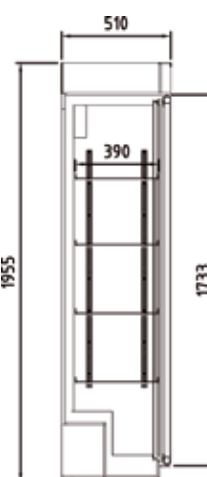

CEVRVB-C