




Model:
VLY+

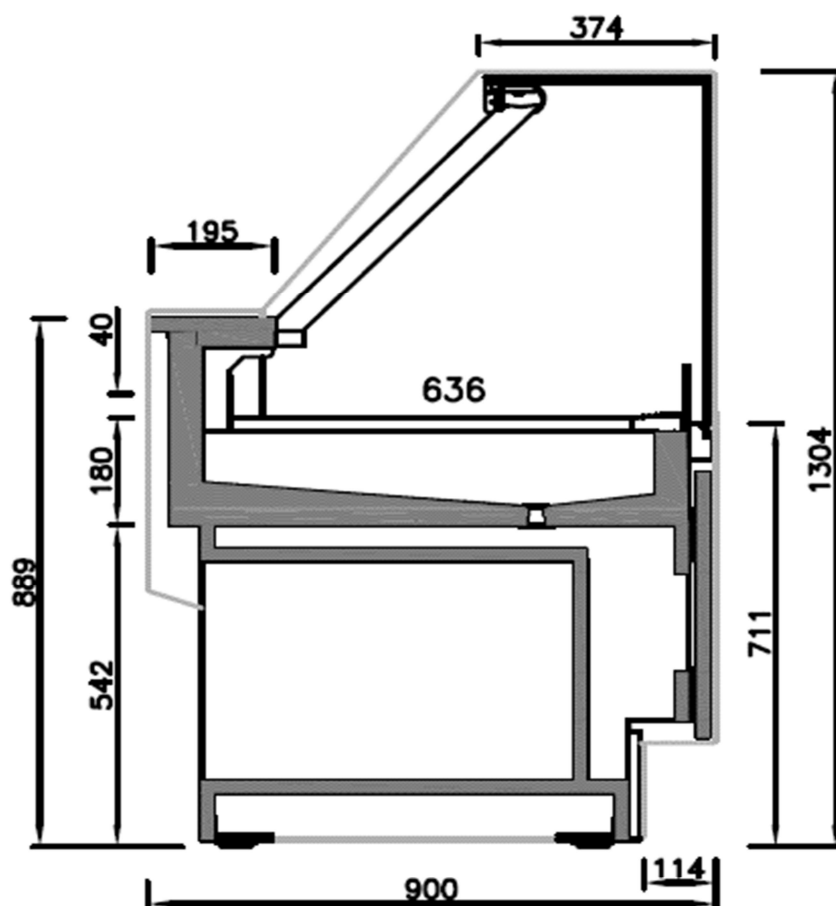


GENERAL DATA

	MODEL						
		VLY9+	VLY12+	VLY15+	VLY18+	VLY25+	--
		M2	M2	M2	M2	M2	
LENGTH (mm)		938	1250	1562	1875	2500	
SIDE WALL THICKNESS (mm)		30+30					
NUMBER OF SELVES		4/2	6/3	6/3	8/4	12/6	
ELECTRONIC CONTRL		DIGITAL					
REFRIGERATED AREA (m ²)		0,6	0,8	1	1,2	1,6	
USEABLE VOLUME (lts.)		72	96	120	144	192	
TDA - AREA TOTAL DISPLAY (m ²)		0,563	0,75	0,937	1,124	1,499	
WEIGHT (kg)		180	251	230	337	413	
DIMESIONS IN TRANSPORT (mm)		1100 x 1000 x 1575	1470 x 1000 x 1575	1680 x 1000 x 1575	2080 x 1000 x 1575	2675 x 1000 x 1575	

INSTALLATION DETAILS

DATA TABLE	MODELO	938	1250	1562	1875	2500
	A (mm)	284	284	284	284	284
	B (mm)	469	625	781	938	1250
	C (mm)	151	151	151	151	151
	D (mm)	231	231	231	231	231
	E (mm)	-	-	-	-	-

DRAINAGE

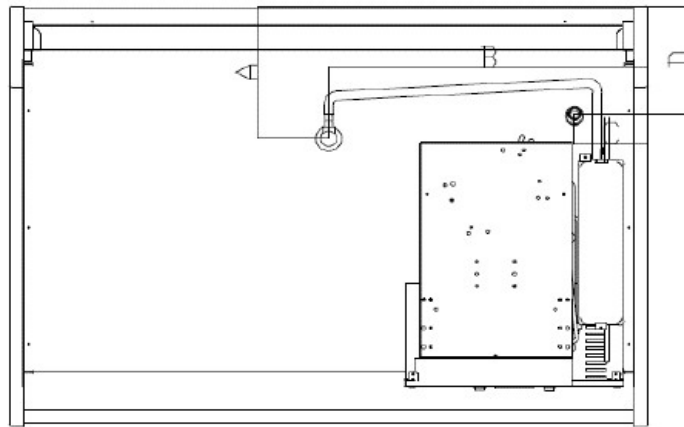

TECHNICAL CONFIGURATION

		M2 [-1°C/+7°C]
INTERIOR TEMPERATURE	SET POINT	4°C
	DIFFERENTIAL	4°C
DEFROSTING SYSTEM		ELECTRIC
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

BASE EQUIPMENT Length (mm)		MODEL					
		VLY9+	VLY12+	VLY15+	VLY18+	VLY25+	
COMPRESSOR	N°	1	1	1	1	1	
	W	171	171	340	340	476	
	A	1,11	1,11	2,04	2,04	3,01	
REFRIGERANT	Tipo	R - 290					
	gr	75	75	120	145	150	
COIL FANS	N°	1	1	2	2	3	
	W	4,8	4,8	4,8	4,8	4,8	
	A	0,04	0,04	0,04	0,04	0,04	
CONDESATOR FANS	N°	1	1	1	1	1	
	W	25	25	25	25	25	
	A	0,425	0,425	0,425	0,425	0,425	
CANOPY LIGHTING	W	23	30	38	45	61	
	A	0,10	0,14	0,17	0,21	0,28	
POWER	W	223	231	412	420	576	
	A	1,68	1,71	2,72	2,75	3,83	
ENERGY CONSUMPTION	kWh/24h	3,75	3,88	6,93	7,06	9,68	
ENERGY EFFICIENCY CLASS	[A - G]						