




Model:
VLY_LG+

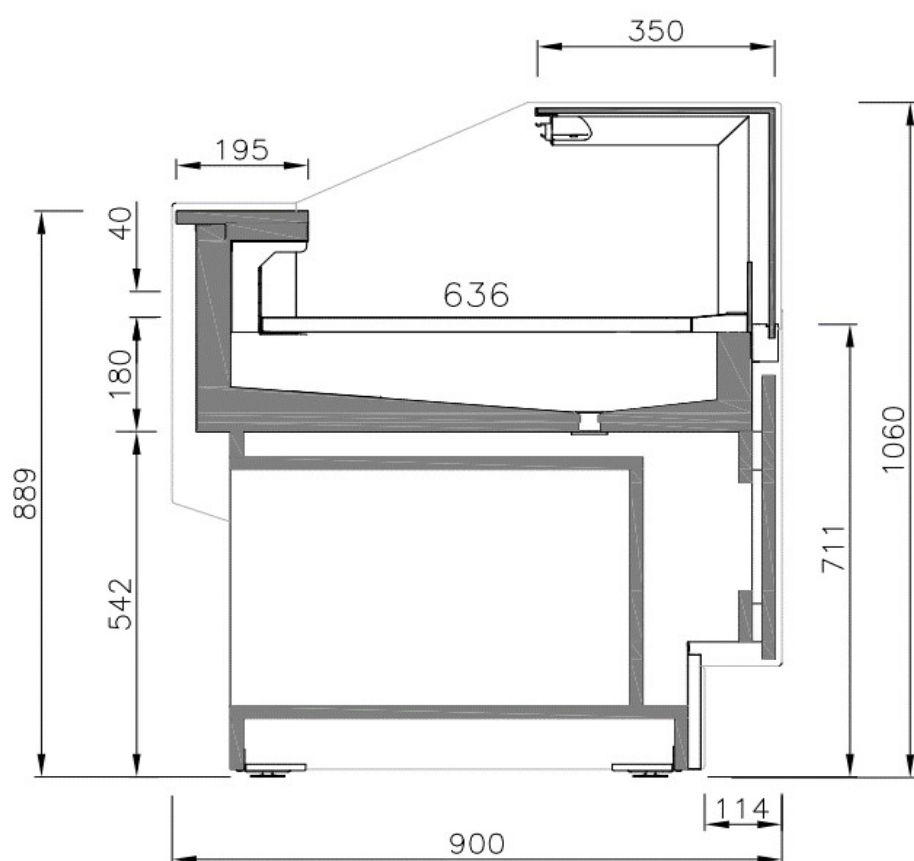


GENERAL DATA

	MODEL						
		VLY9LG+	VLY12LG+	VLY15LG+	VLY18LG+	VLY25LG+	--
		M2	M2	M2	M2	M2	
LENGTH (mm)		938	1250	1562	1875	2500	
SIDE WALL THICKNESS (mm)		30+30					
NUMBER OF SELVES		4/2	6/3	6/3	8/4	12/6	
ELECTRONIC CONTRL		DIGITAL					
REFRIGERATED AREA (m ²)		0,6	0,8	1	1,2	1,6	
USEABLE VOLUME (lts.)		72	96	120	144	192	
TDA - AREA TOTAL DISPLAY (m ²)		0,563	0,75	0,937	1,124	1,499	
WEIGHT (kg)		180	251	230	337	413	
DIMESIONS IN TRANSPORT (mm)		1230 x 1000 x 1320	1470 x 1000 x 1320	1725 x 1000 x 1320	2080 x 1000 x 1320	2675 x 1000 x 1320	

INSTALLATION DETAILS

DATA TABLE	MODELO	938	1250	1562	1875	2500
	A (mm)	284	284	284	284	284
	B (mm)	469	625	781	938	1250
	C (mm)	151	151	151	151	151
	D (mm)	231	231	231	231	231
	E (mm)	-	-	-	-	-

DRAINAGE

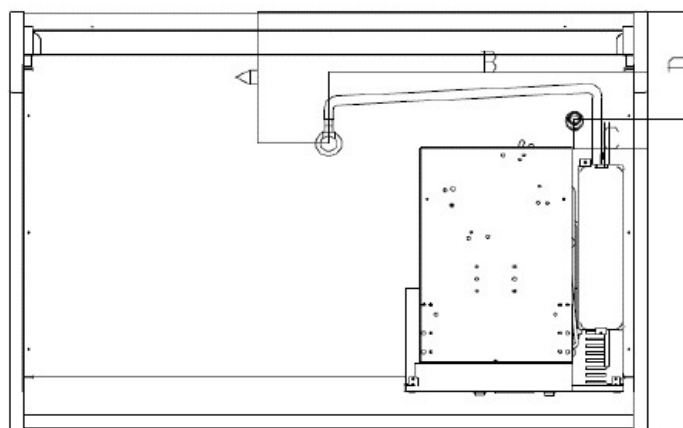

TECHNICAL CONFIGURATION

		M2 [-1°C/+7°C]
INTERIOR TEMPERATURE	SET POINT	4°C
	DIFFERENTIAL	4°C
DEFROSTING SYSTEM		ELECTRIC
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL					
		VLY9LG+	VLY12LG+	VLY15LG+	VLY18LG+	VLY25LG+	
Length (mm)		938	1250	1562	1875	2500	
COMPRESSOR	N°	1	1	1	1	1	
	W	171	171	340	340	476	
	A	1,11	1,11	3,09	3,09	3,01	
REFRIGERANT	Tipo	R - 290					
	gr	75	75	120	145	150	
COIL FANS	N°	1	1	2	2	3	
	W	4,8	4,8	4,8	4,8	4,8	
	A	0,040	0,040	0,040	0,040	0,040	
CONDESATOR FANS	N°	1	1	1	1	1	
	W	25	25	25	25	25	
	A	0,425	0,425	0,425	0,425	0,425	
CANOPY LIGHTING	W	19	24	30	36	47	
	A	0,08	0,11	0,14	0,16	0,22	
POWER	W	245	262	448	454	588	
	A	2,08	2,14	4,20	4,35	4,20	
ENERGY CONSUMPTION	kWh/24h	4,19	5,5	7,65	9,84	10,3	
ENERGY EFFICIENCY CLASS	[A-G]						

OPTIONAL EQUIPMENT		MODEL					
		VLY9LG+	VLY12LG+	VLY15LG+	VLY18LG+	VLY25LG+	
Length (mm)		938	1250	1562	1875	2500	
CONDENSATOR FANS (High Efficiency)	N°	-	-	-	-	-	
	W	-	-	-	-	-	
	A	-	-	-	-	-	
EVAPORATION HEATERS	W	450	450	450	450	450	
	A	2	2	2	2	2	