

Codice

AFT211

Modello

BAKERY ROLL IN-1-G FL TFT7" 230/1/50***

Caratteristiche costruttive - Building characteristics

Rivestimento INTERNO / INSIDE covering AISI 304; Technical Box, External Back/Bottom panel galvanized sheet metal
Rivestimento ESTERNO / OUTSIDE covering AISI 304; Technical Box, External Back/Bottom panel galvanized sheet metal

Temp. interna
Internal temp TNBV -10° +40°C

Spessore di isolamento
Thickness of isolation mm. 80

Tensione V - Ph - Hz
Tension V-Ph-Hz 230/1/50 Hz

Dotazioni

Equipment

Centralina elett.
Electronic central TOUCHSCREEN 7"

Gestione HACCP
HACCP Function O

Connessione remota
Remote Connection O

Chiusura con chiave
Key lock -

Illuminazione interna
Internal light I

Condensazione ad acqua
Water condensing unit -

Tensione 60Hz
Voltage 60Hz O

Potenza frigorifera T. evap. -10° / +55° T.cond TN
Refrigeration power ASHRAE Watt 1315

Capillare / Valvola termostatica
Capillary / Thermostatic Valve Cap.

Ventilatore evap.
Evaporator fan Ø - Watt-Volt 2x200Ø-10W-230V

Resistenza Sbrinamento
Defrosting heater Watt 500W x 1/200W x 3

Umidità rel./Potenza umidificatore
Relative humidity/Humidifier output 55% - 95% HR / 600 Watt

Compressore EMBRACO
Compressor NT6222U

Ventilatore cond.
Condenser fan Ø - Watt-Volt 1X254Ø-18W-230V

Refrigerante R290 GWP: 3
Refrigerant

Assorbimento
Absorption Kw 1,4 / A 7,5





Rumorosità Db(A) 60,3
Noise

Code

AFT211

Model

BAKERY ROLL IN-1-G FL TFT7" 230/1/50***

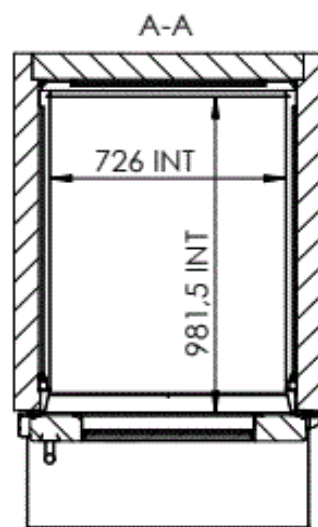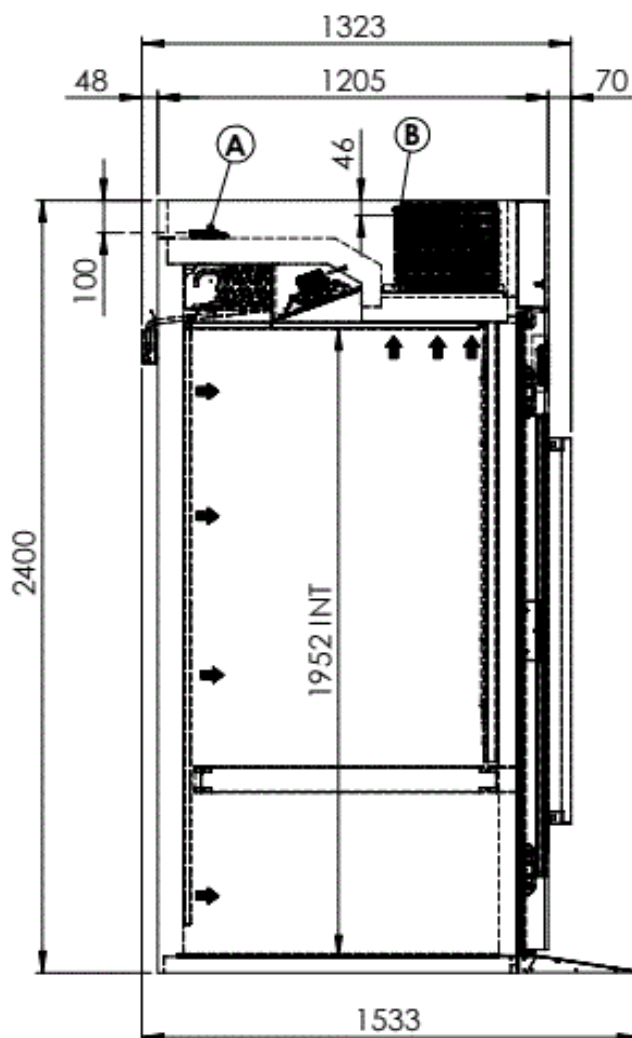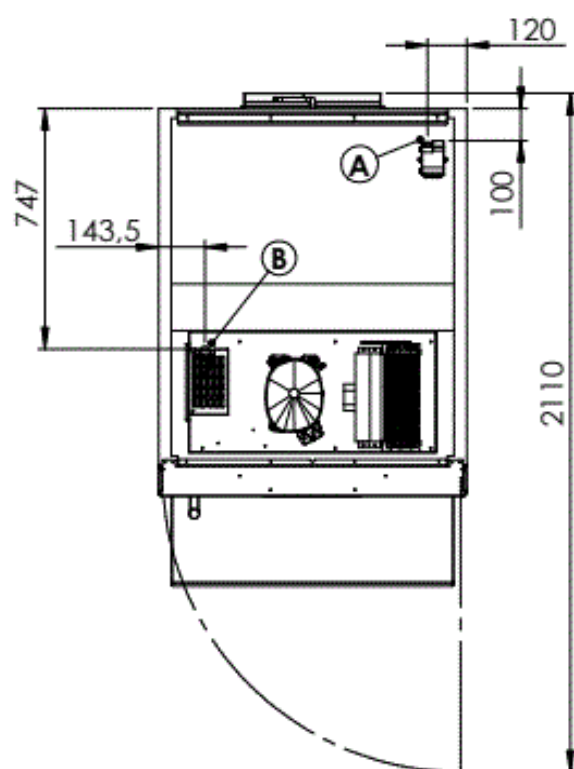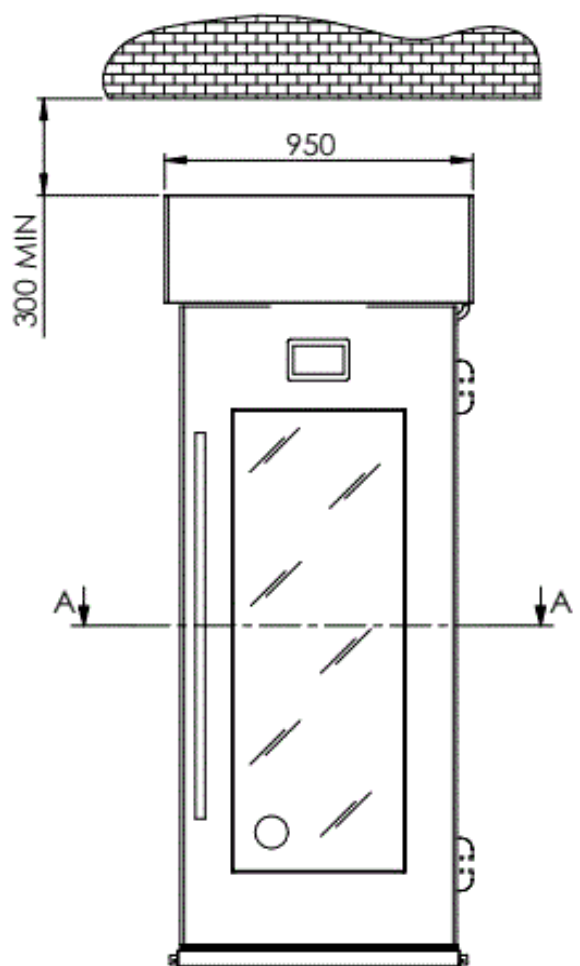

A - ALIMENTAZIONE - MAIN SUPPLY
B - ATTACCO ACQUA 3/4" - WATER IN 3/4"