




ROMY (BIG) BLOOMER 4,100  
SMALL BLACK 1,10  
SMALL-GRANDY 1,00  
SMALL-ONE 1,45  
SMALL-PLANTY DANUM 1,35

*Model:*  
VNZ\_HT+

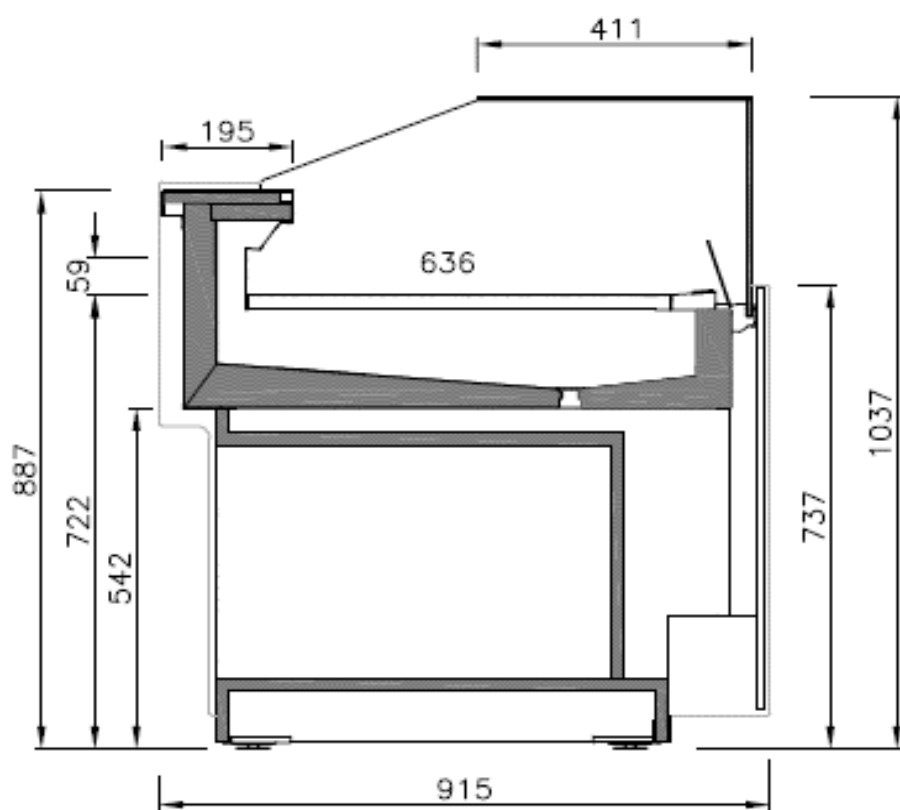



GENERAL DATA

	MODEL			
	VNZ9HT+	VNZ12HT+	VNZ15HT+	VNZ18HT+
LENGTH (mm)	938	1250	1562	1875
SIDE WALL THICKNESS (mm)	20+20			
ELECTRONIC CONTROL	DIGITAL			
USEFUL AREA (m <sup>2</sup> )	0,58	0,78	0,98	1,18
USEABLE VOLUME (lts.)	72	96	120	144
TDA - AREA TOTAL DISPLAY (m <sup>2</sup> )	0,56	0,74	0,93	1,18
WEIGHT (kg)	160	225	260	300
DIMENSIONS IN TRANSPORT (mm)	1100 x 1000 x 1580	1420 x 1000 x 1580	1680 x 1000 x 1580	2030 x 1000 x 1580

INSTALLATION DETAILS

DATA TABLE	MODEL	938	1250	1562	1875	-
	A (mm)	284	284	284	284	
	B (mm)	469	625	781	938	
	C (mm)	151	151	151	151	
	D (mm)	231	231	231	231	

DRAINAGE

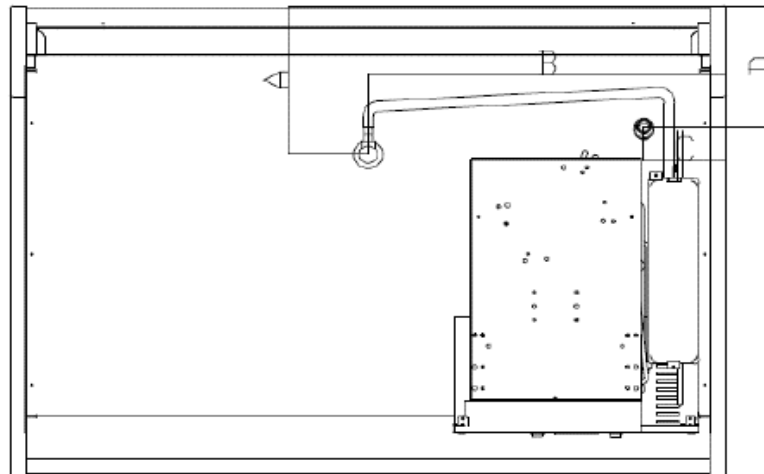

## TECHNICAL CONFIGURATION

		HT [40°C/+50°C ]
INTERIOR TEMPERATURE	SET POINT	50°C
	DIFFERENTIAL	5°C
DEFROSTING SYSTEM		-
NUMBER OF DEFROSTS / 24h		-
END OF DEFROSTING TEMPERATURE		-
MAXIMUM DEFROSTING TIME		-

Ambient Temp.	Rel. Humidity	Climatic Class
-	-	-

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

## INSTALLATION DATA

BASE EQUIPMENT		MODEL			
		VNZ9HT+	VNZ12HT+	VNZ15HT+	VNZ18HT+
Length (mm)		938	1250	1562	1875
MAIN RESISTANCE	m	14,5	18	22	26
	W	435	540	660	780
	A	1,98	2,45	3,00	3,55
FIN RESISTANCE	N°	1	1	2	2
	W	500	750	500	500
	A	2,27	3,41	2,27	2,27
FIN FANS	N°	1	1	2	2
	W	5	5	5	2
	A	0,02	0,02	0,02	0,01
LIGHTING	m	0,85	1,16	1,47	1,8
	W	8,16	11,136	14,112	17,28
	A	0,04	0,05	0,06	0,08
POWER	W	948	1306	1684	1801
	A	4,3	5,9	5,4	5,9
ENERGY CONSUMPTION	kWh/24h	14,8	20,4	20,2	23,3