
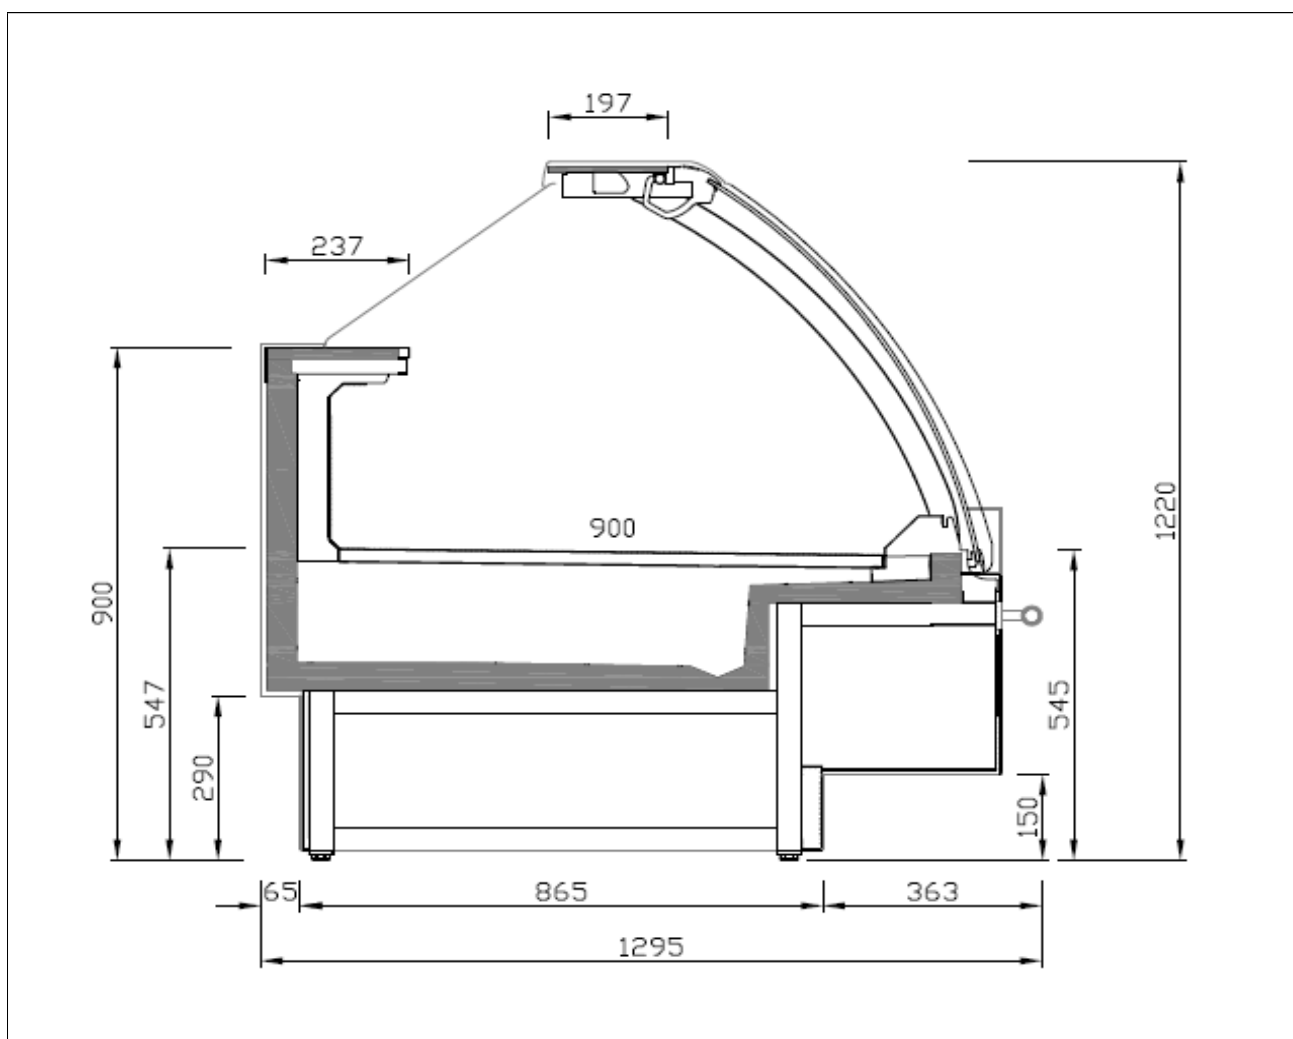


Data Sheet

Model:






VEX_90_45_U+

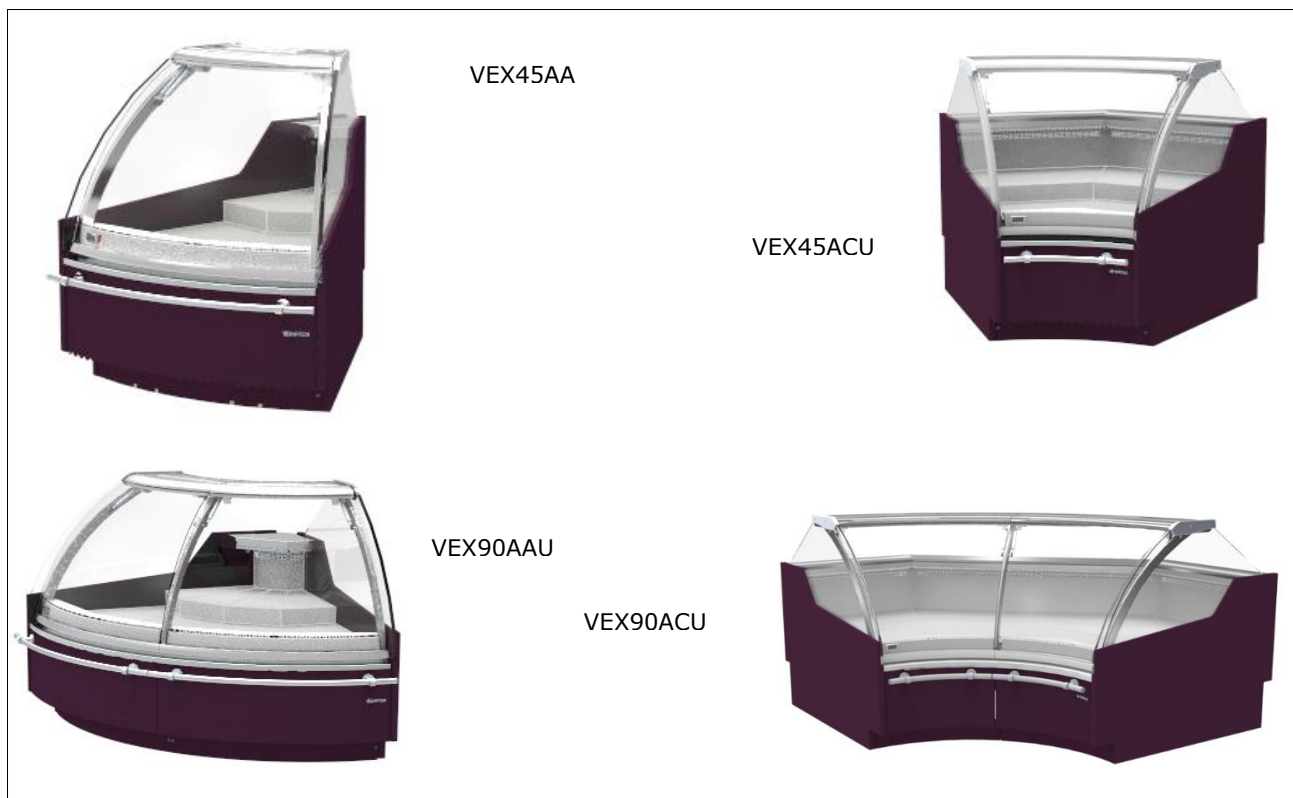

GENERAL DATA

	MODEL			
	VEX90AAU+	VEX90ACU+	VEX45AA+	VEX45ACU+
	M1	M1	M1	M1
SIDE WALL THICKNESS (mm)	30+30			
ELECTRONIC CONTROL	DIGITAL			
REFRIGERATED AREA (m ²)	0,88	2	0,44	1
USEABLE VOLUME (lts.)	255,2	580	127,6	290
TDA - AREA TOTAL DISPLAY (m ²)	N/A	N/A	N/A	N/A
WEIGHT (kg)	126	200	83	134
DIMENSIONS IN TRANSPORT (mm)	1995 X 1295 X 1555	2795 X 1495 X 1555	1295 X 1055 X 1555	1595 X 1495 X 1555
REAR SLIDING DOORS	OPTIONAL			

INSTALLATION DETAILS

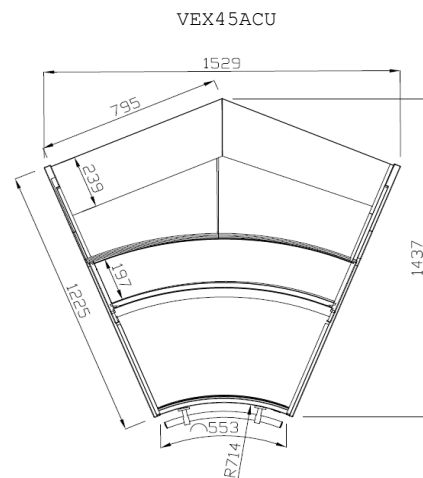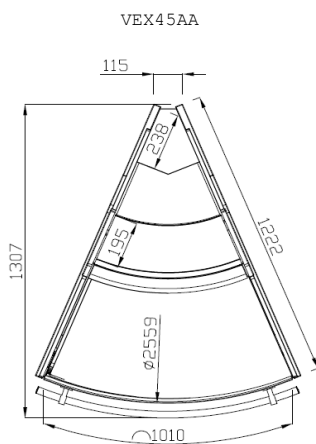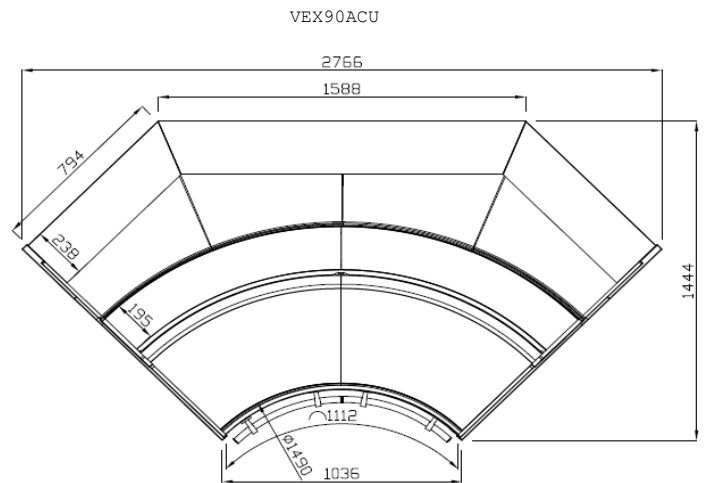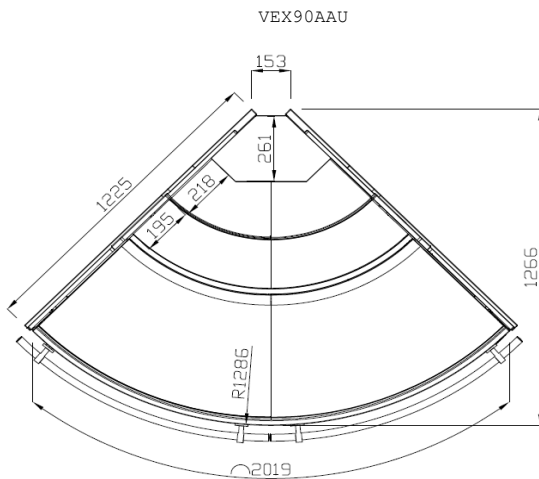

TECHNICAL CONFIGURATION

		M2 [-1°C/+7°C]
INTERIOR TEMPERATURE	SET POINT	2°C
	DIFFERENTIAL	2°C
DEFROSTING SYSTEM		HOT GAS
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		15'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Rel. Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	<70

INSTALLATION DATA

BASE EQUIPMENT		MODEL			
		VEX90AAU+	VEX90ACU+	VEX45AA+	VEX45ACU+
COMPRESSOR	N°	1	1	1	1
	W	430	561	0	430
	A	2,0	2,6	0,0	2,0
REFRIGERANT	Tipo	R290			
	gr	105	150	0	55
COIL FANS	N°	1	2	0	1
	W	5	10	0	5
	A	0,02	0,05	0,00	0,02
CONDENSATOR FANS	N°	1	2	0	1
	W	25	25	0	25
	A	0,1	0,1	0,0	0,1
LIGHTING	W	29	29	14	29
	A	0,13	0,13	0,07	0,13
EVAPORATION HEATERS (*)	W	450	450	450	450
	A	1	1	1	1
HEATER	W	66	39	33	30
	A	0,3	0,2	0,2	0,1
POWER	W	555	699	14	489
	A	2,2	3,0	0,1	2,2
ENERGY CONSUMPTION	kWh/24h	11,2	14,0	1,0	10,3

[*] NOTE: The equipment requires two independent power points, one for the base unit and one for the evaporative tray.

OPTIONAL EQUIPMENT		MODEL			
		VEX90AAU+	VEX90ACU+	VEX45AA+	VEX45ACU+
SCC "CONDENSATION CONTROL SYSTEM"	W	14	14	14	14
	A	0,14	0,14	0,14	0,14