



Codice

TEL01000000000

Modello

BAKERY TAB C S FB TFT7" 092

Caratteristiche costruttive - Building characteristics

Rivestimento INTERNO / INSIDE covering AISI 304; Technical Box, External Back/Bottom panel galvanized sheet metal
Rivestimento ESTERNO / OUTSIDE covering Acciaio INOX AISI 304 / STAINLESS STEEL AISI 304

Temp. interna

Internal temp. TNBV -5° +40°C

Classe

Class. **Alte prestazioni** - High performance

5

40°C-40%

Spessore di isolamento

Thickness of isolation mm. 50

Tensione V - Ph - Hz

Tension V-Ph-Hz 230/1/50 Hz

Quantità prodotto

Amount of product Kg. 20

Dotazioni

Equipment n°1 griglia con guide ad "L" - wire shelf with "L"-shaped slideways EN 60x40

Centralina elett.

Electronic central TOUCHSCREEN 7"

Gestione HACCP

HACCP Function I

Chiusura con chiave

Key lock O

Condensazione ad acqua

Water condensing unit O

Tensione 60Hz

Voltage 60Hz O

Peso netto

Net Weight Kg. 99

Con imballo / Packed 105

Potenza frigorifera

Refrigeration power ASHRAE Watt T. evap. -10° / +55° T.cond TN

498

Capillare / Valvola termostatica

Capillary / Thermostatic Valve Cap.

Ventilatore evap.

Evaporator fan Ø - Watt-Volt TG-10W-230V

Resistenza Sbrinamento

Defrosting heater Watt 180W

Compressore

Compressor -----

ERMETICO

Ventilatore cond.

Condenser fan Ø - Watt-Volt 1x230Ø-12W-230V EC

Gas

Gas Kg. R290 GWP: 3

0,09

Assorbimento


Absorption Watt 320 / A 2,3

Rumorosità

Noise Db(A)

Code	TEL01000000000
Model	BAKERY TAB C S FB TFT7" 092
External dimensions packed	987x810x1110

BAKING TAB GREEN FB 92 S-P-A

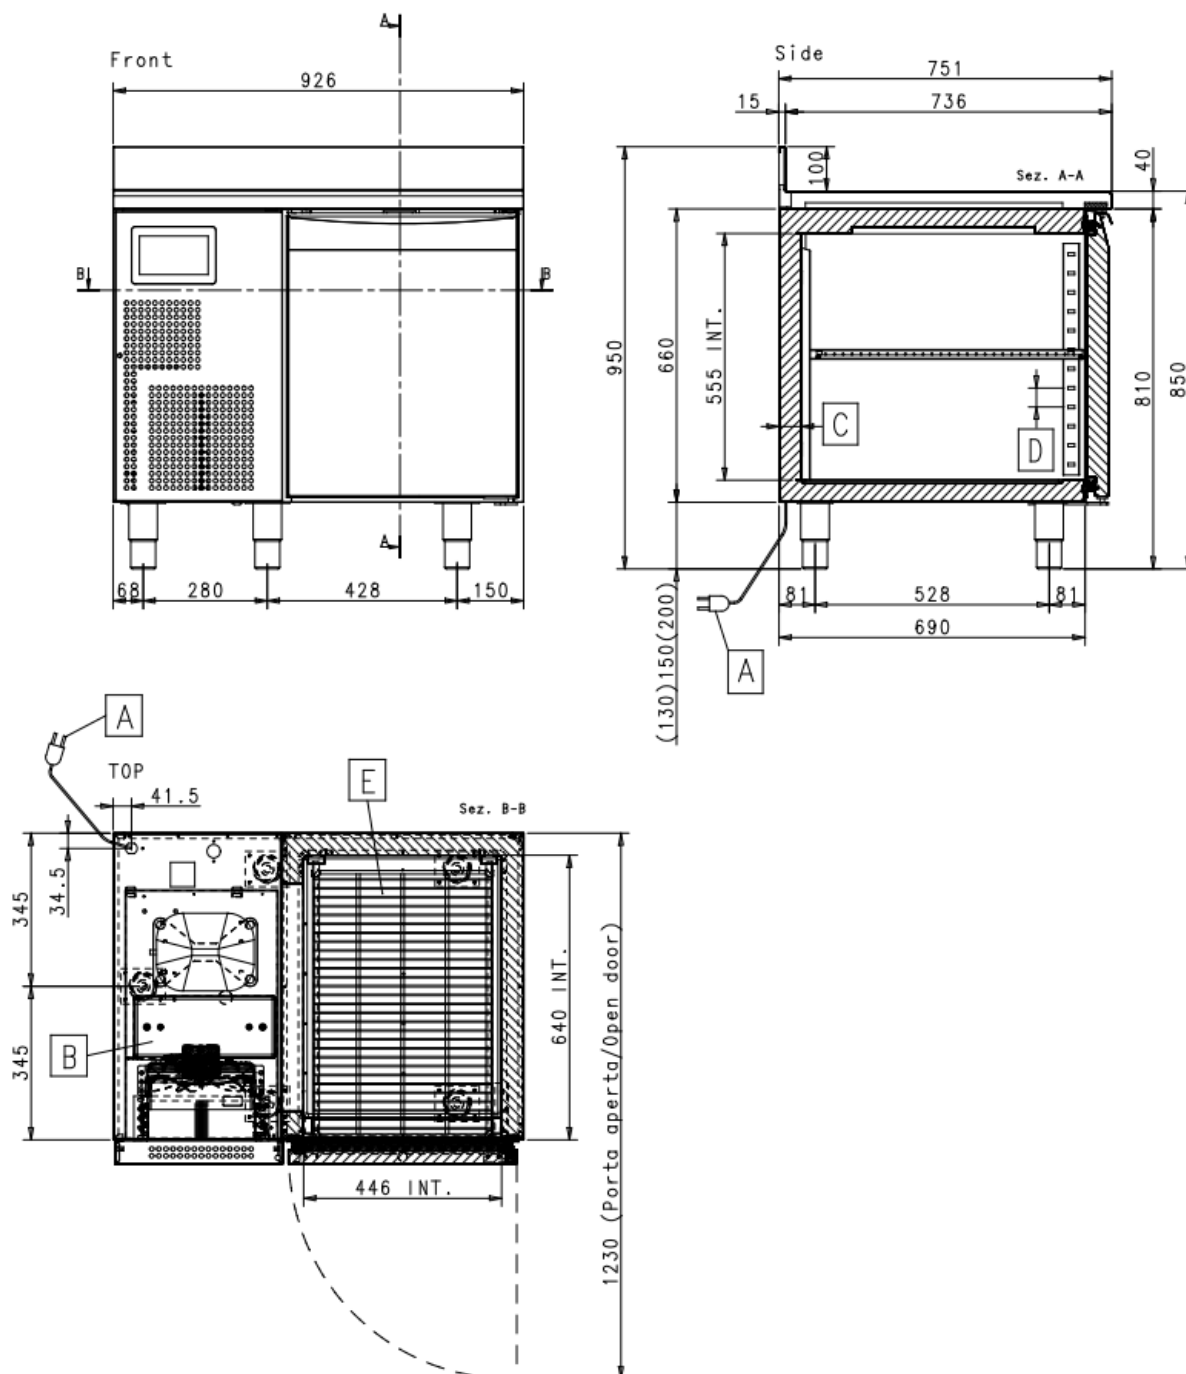

- A - Cavo Alimentazione L.2100 / Line cable 2100 mm lenght
B - Vaschetta Evaporazione Condensa / Pan evaporation condensation water
C - Spessore Coibentazione 50mm / 50 mm insulation thickness
D - Passo Cremagliere 43mm / Slideways support with 43 mm pitch
E - Griglia 400x600mm N°1 in dotazione / N°1 plastified wire shelves 400x600mm included