

SPC501



SPC501

STRENGTHS

- ✓ The Supercool phenomenon consists of cooling a liquid below its freezing point, remaining in a stable liquid state without freezing. Designed with state-of-the-art technology, this equipment represents a qualitative leap in industrial cooling. Developed by our R+D+i team and designed for any type of environment.

DATA SHEET
CHEST BOTTLE COOLER
SPC501



Rev: 12/06/2026

		SPC501	
Operating temp	-10°C / 0°C		
Climate class	4 (30°C, 55%HR)		
Capacity	500		
Overall dimensions LxDxH	687 x 705 x 2.003		
Cabinet Construction			
Material exterior		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Material interior		AISI 430 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 50kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	1		
Door frame heaters	✓		
Door lock	✓		
Shelving	5		
Shelves dimensions resLxI(mm)	530 x 460		
Legs, casters		Levellers	
Refrigeration			
Thermostat	Controlador digital	Digital controller	Contrôleur numérique
Defrost	Parada de compresor Gas caliente	Compressor off Hot gas defrost	Arrêt du compresseur Gaz chaud
Expansion Device	Capilar	Capillary	Capillaire
Electronic fans	✓		
Condensation	Forzada	Forced-air	Forcé
Evaporation	Evaporación ventilada	Ventilated evaporator	Système d'évaporation ventilé
Technical Features			
Refrigerant	R290		
Ref amount	130		

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 12/06/2026 FI_SPC501_00_ES_EN_FR_22_01

Power Supply	230V / 1 /50 Hz		
Refrigeration Capacity	567		
Power	629		
Amps	4,09		
Energy Consumption	-		
Energy Class	-		
Crating / Palettisation			
Crated dimensions / Dimensions palettisation L x l x H (mm)	800 x 785 x 2.155		
Crated volume	1005		
Net Weight (kg)	136		
Crated Weight (kg)	170		
Options			
		Wire shelf	
		Casters	
		115V/1ph/60Hz	
		230V/1ph/60Hz	




SPC501

REACH IN REFRIGERATOR


ELEVATION

RIGHT VIEW

PLAN VIEW

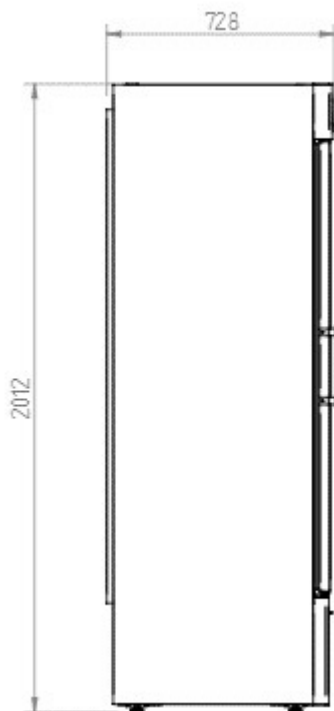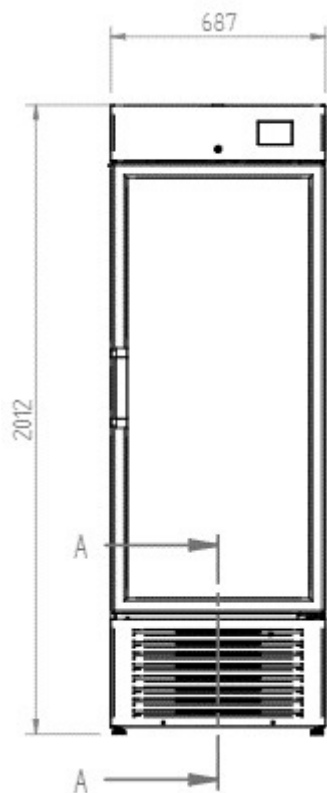

PBOTTLE POSITIONING

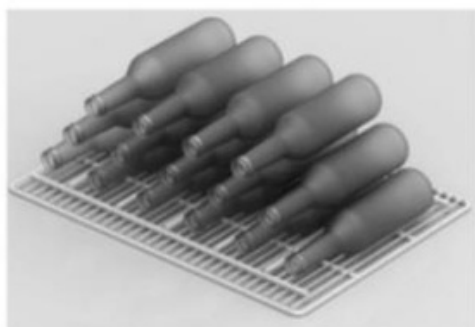

Grado alcohol / Alcoholic strength	Punto de corte / Set Point
5% < 5,5 %	-7°C
4% < 5%	-6°C
3,5% < 4%	-5°C
Cerveza / Beer 0,0%	-2°C
Refrescos carbonatados / Carbonated beverages	-2°C

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

