DATA SHEET
REACH IN REFRIGERATOR

AN401BTPAST

Rev: 22/04/2026



AN401BTPAST

STRENGTHS

√ The range of 600x400 cabinets offer design and robustness, manufactured with high quality materials and components.

The interiors with curves joints are easy to clean and hygienic.

They have a high energy efficiency thanks to the use of R290, LED lighting and electronic fans.

Its high precision digital controller guarantees optimum temperature and safe food storage.

Rev: 01 Fecha/Date: 22/04/2026 FT_AN401BTPAST_00_ES_EN_FR_23_01

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la concepction peuvent etre sujettes à modifications, sans préavis

Infrico

Rev: 22/04/2026

AN401BTPAST

	AN401BTPAST		
Operating temp	-18 ºC		
Climate class	4 (30ºC, 55%HR)		
Capacity (l)	395		
Overall dimensions LxDxH (mm)	557 x 775 x 2.060		
Cabinet Construction			
Exterior Material		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Interior Material		AISI 304 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✔		
LED lighting	✔		
Insulation		Polyurethane with high density 40kg/m3,CFCs free, zero ODPandlow GWP	
Insulation thickness (mm)	55		
Blowing Agent	HFO		
Features			
Doors	1		
Door construction		Solid door with integrated double-trip handle and pivoting hinge and stay open door mechanism. Pressed rear door with four chambercleanless door gasket, easily replaceable.	
Door lock	✘		
Door frame heaters	✔		
Shelving	0/18		
Legs, casters		Stainless steel legs, height adjustablefrom 130-180mm	
Refrigeration			
Thermostat		Touch-screen, IP65	
Defrost		Compressor off	
Expansion Device		Capillary	

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la concepction peuvent etre sujettes à modifications, sans préavis

Electronic fans	✔		
Condensation		Forced-air	
Evaporation		Forced-air evaporator with anti corrosion epoxy coating	
Condensate pan		Hot gas condensate pan	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	90		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	1000		
Power (W)	607		
Amps (A)	2,83		
Energy Consumption (kWh/24h)	5,10		
Energy Class	D		
Compressor type	ON / OFF		
Paletización / Crating / Palettisation			
Crated dimensions L x l x H (mm)	760 x 900 x 2.100		
Crated volume (l)	933		
Net Weight (kg)	94		
Crated Weight (kg)	110		
Options			
		pan 600x400	
		Digital control by bluetooth	
		Lock	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

Rev: 01 Fecha/Date: 22/04/2026 FT_AN401BTPAST_00_ES_EN_FR_23_01

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)


Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la concepction peuvent etre sujettes à modifications, sans préavis

DATA SHEET
REACH IN REFRIGERATOR


AN401BTPAST

Rev: 22/04/2026


ELEVATION

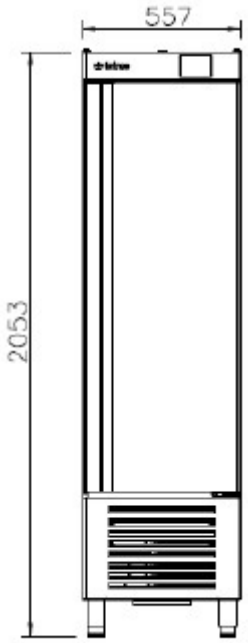


RIGHT VIEW

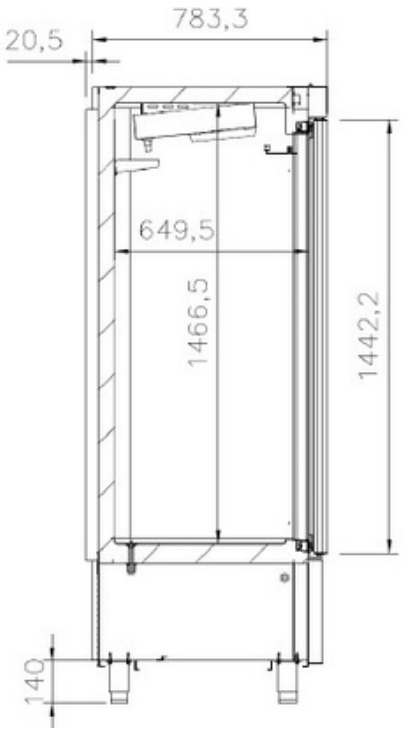


PLAN VIEW

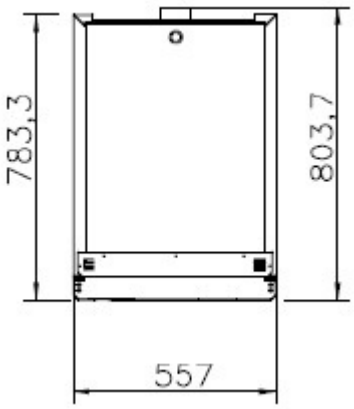

CONNECTION

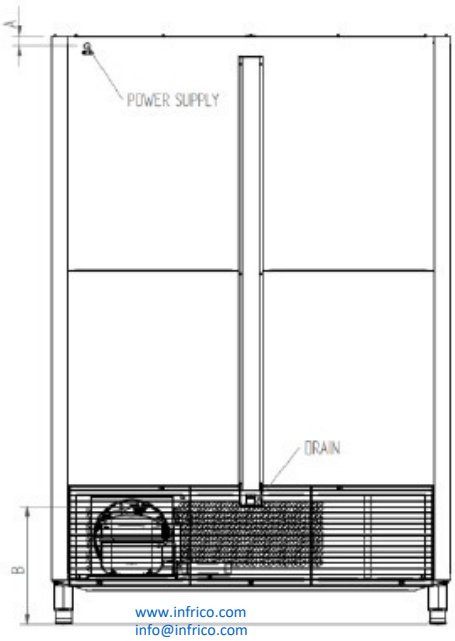

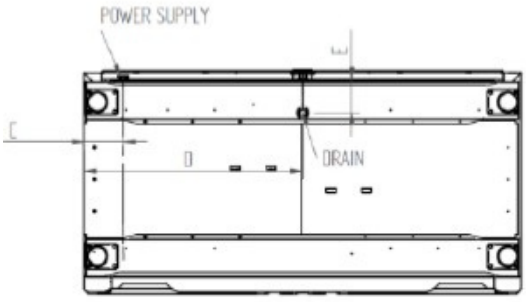

MODELO	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AN401BTPAST	76	450	86	280	129

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la concepction peuvent etre sujettes à modifications, sans préavis

Rev: 01 Fecha/Date: 22/04/2026 FT_AN401BTPAST_00_ES_EN_FR_23_01