



SPC 1470B

STRENGTHS

✓ The Supercool phenomenon consists of cooling a liquid below its freezing point, remaining in a stable liquid state without freezing.

Designed with state-of-the-art technology, this equipment represents a qualitative leap in industrial cooling. Developed by our R+D+i team and designed for any type of environment.

DATA SHEET
CHEST BOTTLE COOLER
SPC 1470 B



Rev: 12/06/2026

	SPC 1470 B		
Operating temp	+0°C / -8°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	440		
Overall dimensions LxDxH (mm)	1.470 x 700 x 1.187		
Cabinet Construction			
Exterior Material		Epoxy painted steel	
Back Material		Galvanized steel	
Interior Material		AISI 430 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 50kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	2		
Door frame heaters	X		
Door lock	X		
Shelving	6		
Shelves dimensions LxD (mm)	545 x 365		
Legs, casters		Levellers	
Refrigeration			
Thermostat		Digital controller	
Defrost		Compressor off Hot gas defrost	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Forced-air	
Evaporation		Ventilated evaporator	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	130		

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 12/06/2026 FT_SPC1470B_00_ES_EN_FR_25_01

Power Supply	230V / 1 /50 Hz		
Refrigeration Capacity (W)	567		
Power (W)	629		
Amps (A)	3,90		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	1.530x 760 x 980		
Crated volume (l)	787		
Net Weight (kg)	200		
Crated Weight (kg)	217		
Options			
		Wire shelf	
		Casters	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

DATA SHEET
CHEST BOTTLE COOLER
SPC 1470 B






Rev: 12/06/2026


ELEVATION

RIGHT VIEW

PLAN VIEW

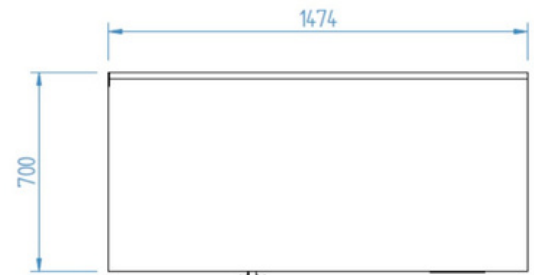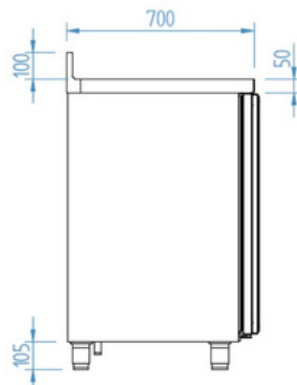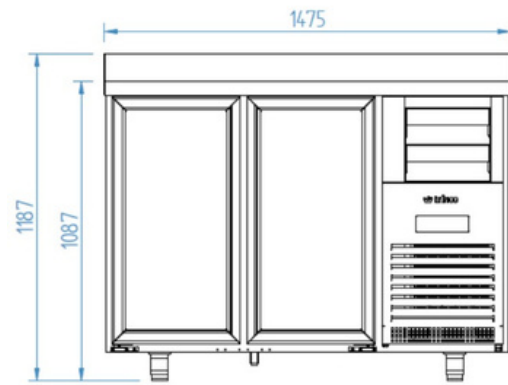

BOTTLE POSITIONING

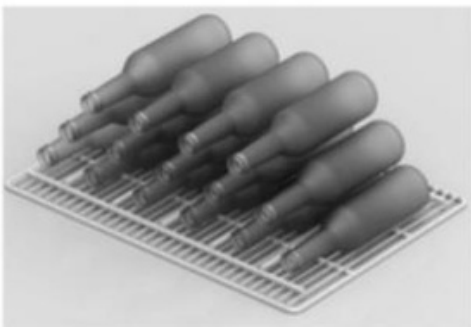

Grado alcohol / Alcoholic strength	Punto de corte / Set Point
5% < 5,5 %	-7°C
4% < 5%	-6°C
3,5% < 4%	-5°C
Cerveza / Beer 0,0%	-2°C
Refrescos carbonatados / Carbonated beverages	-2°C

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 12/06/2026 FT_SPC1470B_00_ES_EN_FR_25_01