

AGB1402PESC



AGB1402PESC

STRENGTHS

- ✓ The range of GN2 / 1 monoblock cabinets offer design and robustness, manufactured with high quality materials and components.

The interiors with curved joints are easy to clean and hygienic. They have a high energy efficiency thanks to the use of R290, LED lighting and electronic fans. Its high precision digital controller guarantees optimum temperature and safe food storage.

Rev: 01 Fecha/Date: 20/03/2026 FT_AGB1402PESC_00_ES_EN_FR_19_01

AGB1402PESC

AGB1402PESC

Operating temp	-2°C/+2°C		
Climate class	5 (40°C, 40%HR)		
Capacity (l)	1.240		
Overall dimensions LxDxH (mm)	1.385 x 794 x 2.130		
Cabinet Construction			
Exterior Material		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Interior Material		AISI 304 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	75		
Blowing Agent	HFO		
Features			
Doors	2		
Door construction		Solid door with integrated double-trip handle and pivoting hinge and stay open door mechanism. Pressed rear door with four chamber cleanless door gasket, easily replaceable.	
Door lock	✓		
Door frame heaters	✗		
Shelving	14		
Shelves dimensions LxD (mm)	-		
Legs, casters		Stainless steel legs, height adjustable from 130-180mm	
Refrigeration			

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)


Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis




Thermostat	Táctil, IP65	Touch-screen, IP65	Tactile, IP65
Refrigeration system	Monoblock		
Defrost	Parada de compresor	Compressor off	Arrêt du compresseur
Expansion Device	Capilar	Capillary	Capillaire
Electronic fans	✓		
Condensation	Forzada	Forced-air	Forcé
Evaporation	Evaporación con aire forzado, evaporador tratado con epoxi de poliéster anticorrosión	Forced-air evaporator with anti corrosion epoxy coating	Système d'évaporation ventilé, évaporateurs traités avec polyester anticorrosion,
Condensate pan	Bandeja sin resistencia eléctrica	Hot gas condensate pan	Bac d'évaporation sans résistance électrique
Technical Features			
Refrigerant	R290		
Ref amount (gr)	150		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	1000		
Power (W)	374		
Amps (A)	2,86		
Energy Consumption (kWh/24h)	1,80		
Energy Class	A		
Compressor type	INVERTER		
Crating			
Crated dimensions L x l x H (mm)	1.500 x 900 x 2.230		
Crated volume (l)	2342		
Net Weight (kg)	245		
Crated Weight (kg)	270		
Options			
		Polypropylene container	
		Slides	
		Digital control by bluetooth	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

AGB1402PESC


ELEVATION

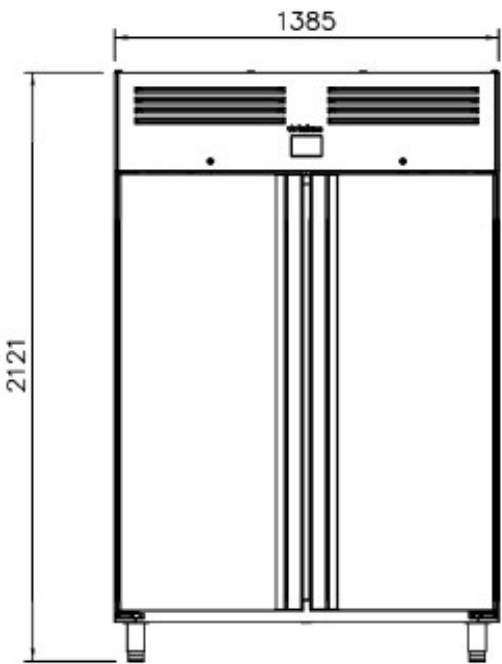


RIGHT VIEW

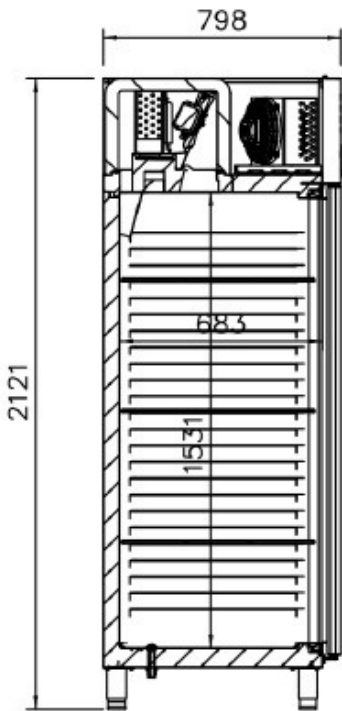


PLAN VIEW

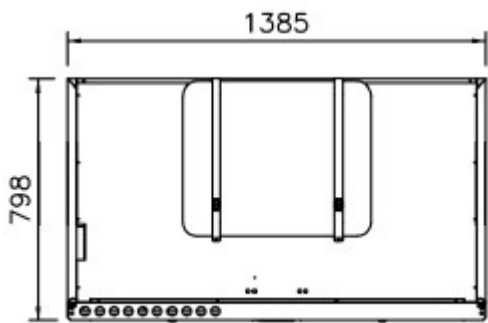

CONNECTION

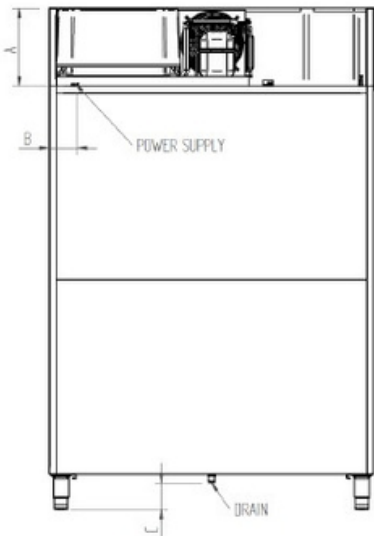

MODELOS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AGB1402PESC	326	109	116	692	105

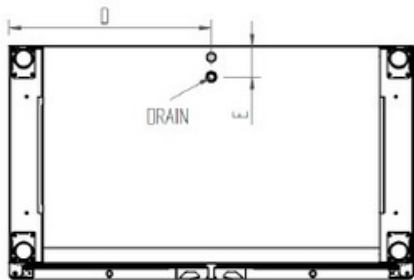

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

