

DATA SHEET
REACH IN REFRIGERATOR
AGB701PESC



Rev: 20/03/2026



AGB701PESC

STRENGTHS

- ✓ The range of GN2/1 monoblock cabinets offer design and robustness, manufactured with high quality materials and components.

The interiors with embedded guides and curved joints are easy to clean and hygienic.

They have a high energy efficiency thanks to the use of R290, LED lighting and electronic fans.

Its high precision digital controller guarantees optimum temperature and safe food storage.

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso

We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



DATA SHEET
REACH IN REFRIGERATOR
AGB701PESC



Rev: 20/03/2026

		AGB701PESC	
Operating temp	-2°C/+2°C		
Climate class	5 (40°C, 40%HR)		
Capacity (l)	560		
Overall dimensions LxDxH (mm)	687 x 794 x 2.130		
Cabinet Construction			
Exterior Material		AISI 304 Stainless Steel	
Back Material		Galvanized steel	
Interior Material		AISI 304 Stainless Steel	
Interior Construction		Rounded interior corner	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	75		
Blowing Agent	HFO		
Features			
Doors	1		
Door construction		Solid door with integrated double-trip handle and pivoting hinge and stay open door mechanism. Pressed rear door with four chamber cleanless door gasket, easily replaceable.	
Door lock	✓		
Door frame heaters	✗		
Shelving	7		
Shelves dimensions LxD (mm)	-		
Legs, casters		Stainless steel legs, height adjustable from 130-180mm	
Refrigeration			

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha /Date: 20/03/2026 FI_AGB701PESC_00_ES_EN_FR_19_01

Thermostat	Táctil, IP65	Touch-screen, IP65	Tactile, IP65
Refrigeration system	Monoblock		
Defrost	Parada de compresor	Compressor off	Arrêt du compresseur
Expansion Device	Capilar	Capillary	Capillaire
Electronic fans	✓		
Condensation	Forzada	Forced-air	Forcé
Evaporation	Evaporación con aire forzado, evaporador tratado con epoxi de poliéster anticorrosión	Forced-air evaporator with anti corrosion epoxy coating	Système d'évaporation ventilé, évaporateurs traités avec polyester anticorrosion,
Condensate pan	Bandeja sin resistencia eléctrica	Hot gas condensate pan	Bac d'évaporation sans résistance électrique
Technical Features			
Refrigerant	R600a		
Ref amount (gr)	130		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity(W)	500		
Power (W)	210		
Amps (A)	1,53		
Energy Consumption (kWh/24h)	0,94		
Energy Class	A		
Compressor type	INVERTER		
Crating			
Crated dimensions L x l x H (mm)	800 x 890 x 2.180		
Crated volume (l)	1.162		
Net Weight (kg)	137		
Crated Weight(kg)	153		
Options			
		Polypropylene container	
		Slides	
		Digital control by bluetooth	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

DATA SHEET
 REACH IN REFRIGERATOR
AGB701PESC






Rev: 20/03/2026


ELEVATION

RIGHT VIEW


PLAN VIEW

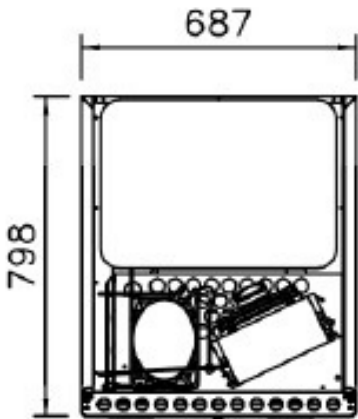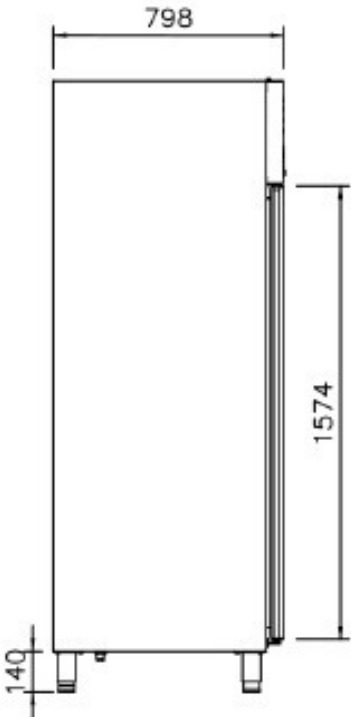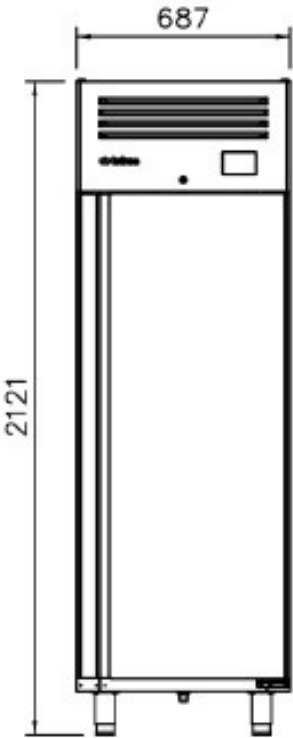

CONNECTION

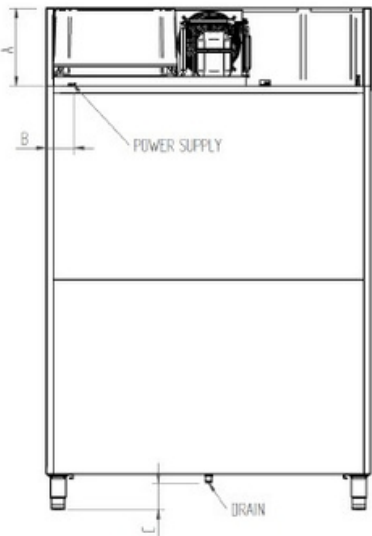

MODELOS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
AGB701PESC	326	109	116	340	105

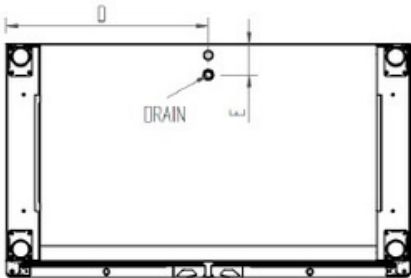

www.infrico.com
info@infrico.com
 Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha /Date: 20/03/2026 FT_AGB701PESC_00_ES_EN_FR_19_01