

DATA SHEET
CHEST BOTTLE COOLER
ERV15



Rev: 11/02/2026



ERV15

STRENGTHS

- ✓ Improved energy classification due to the use of R-290 refrigerant, electronic fans and optimized air circulation for better interior temperature uniformity. Greater precision in temperature control. Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



DATA SHEET
CHEST BOTTLE COOLER
ERV15



Rev: 11/02/2026

	ERV15		
Operating temp	+4°C / +12°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	140		
Overall dimensions LxDxH (mm)	600 x 510 x 920		
Cabinet Construction			
Exterior Material		Plastic-coated steel, black	
Back Material		Plastic-coated steel, black	
Interior Material		Plastic-coated steel, grey	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	1		
Door construction		-	
Door lock	✓		
Door frame heaters	-		
Shelving	2		
Shelves dimensions LxD (mm)	525x350		
Legs, casters		Levellers	
Refrigeration			
Thermostat		Digital controller	
Defrost		Automatic	
Expansion Device		Capillary	
Electronic fans	✗		
Condensation		Forced-air	
Evaporation		Evaporator with anti corrosion epoxy coating	
Technical Features			

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



Rev: 01 Fecha/Date: 11/02/2026 FT_ERV15_00_ES_EN_FR_19_01

Refrigerant	R290		
Ref amount (gr)	80		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		
Power (W)	249		
Amps (A)	1,41		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	650 x 600 x 1.100		
Crated volume (l)	282		
Net Weight (kg)	54		
Crated Weight (kg)	64		
Options			
		LED RGB	




ERV25

STRENGTHS

- ✓ Improved energy classification due to the use of R-290 refrigerant, electronic fans and optimized air circulation for better interior temperature uniformity. Greater precision in temperature control. Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

		ERV25	
Operating temp	+4°C / +12°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	320		
Overall dimensions LxDxH (mm)	900 x 510 x 920		
Cabinet Construction			
Exterior Material		Plastic-coated steel, black	
Back Material		Plastic-coated steel, black	
Interior Material		Plastic-coated steel, grey	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	2-2-3		
Door construction	-	-	-
Door lock	✓		
Door frame heaters	-		
Shelving	2		
Shelves dimensions LxD (mm)	-		
Legs, casters		Levellers	
Refrigeration			
Thermostat		Digital controller	
Defrost	-		
Expansion Device		Capillary	
Electronic fans	✗		

Condensation		Forced-air	
Evaporation		Evaporator with anti corrosion epoxy coating	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	110		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		
Power (W)	318		
Amps (A)	1,72		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	950 x 600 x 1.080 950 x 600 x 1.080		
Crated volume(l)	422		
Net Weight (kg)	84		
Crated Weight (kg)	110		
Options			
		LED RGB	
		Wire shelves (502x27)	
		Wire shelves (502x28)	
		Wire shelves (502x31)	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

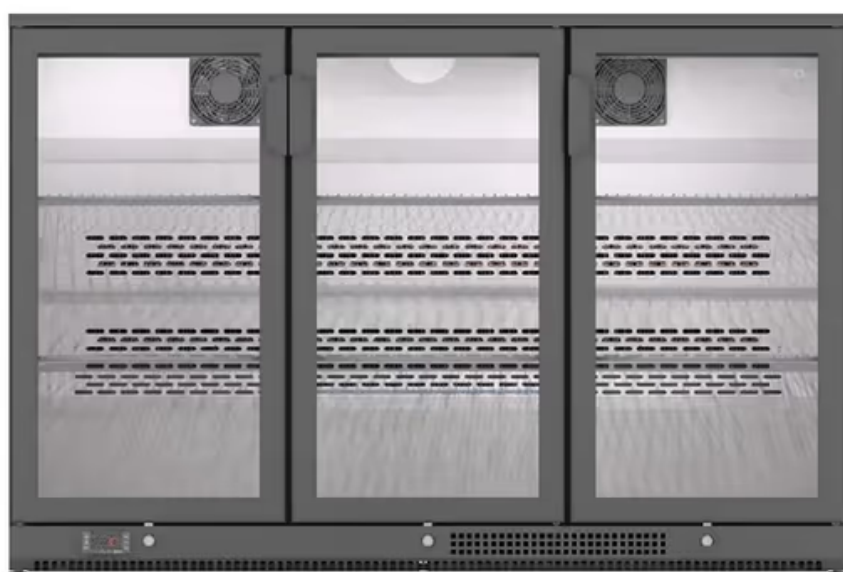

ERV35

STRENGTHS

- ✓ Improved energy classification due to the use of R-290 refrigerant, electronic fans and optimized air circulation for better interior temperature uniformity.
- Greater precision in temperature control.
- Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

		ERV35	
Operating temp	+4°C / +12°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	325		
Overall dimensions LxDxH (mm)	1.350 x 510 x 920		
Cabinet Construction			
Exterior Material		Plastic-coated steel, black	
Back Material		Plastic-coated steel, black	
Interior Material		Plastic-coated steel, grey	
Interior Construction		Rounded interior corner	
Drain	✗		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	HFO		
Features			
Doors	3		
Door construction		-	
Door lock	✓		
Door frame heaters	-		
Shelving	2		
Shelves dimensions LxD (mm)	-		
Legs, casters		Levellers	
Refrigeration			
Thermostat		Digital controller	
Defrost		-	
Expansion Device		Capillary	
Electronic fans	✗		


Condensation		Forced-air	
Evaporation		Evaporator with anti corrosion epoxy coating	
Technical Features			
Refrigerant	R290		
Ref amount (gr)	110		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		
Power (W)	323		
Amps (A)	1,72		
Energy Consumption (kWh/24h)	-		
Energy Class	-		
Crating			
Crated dimensions L x l x H (mm)	1.400 x 610 x 1.100		
Crated volume (l)	633		
Net Weight (kg)	106		
Crated Weight (kg)	125		
Options			
		LED RGB	
		Wire shelves (502x27)	
		Wire shelves (502x28)	
		Wire shelves (502x31)	
		115V/1ph/60Hz	
		230V/1ph/60Hz	

ERV15-ERV25-ERV35




ELEVATION

PLAN VIEW




RIGHT VIEW





ERV15

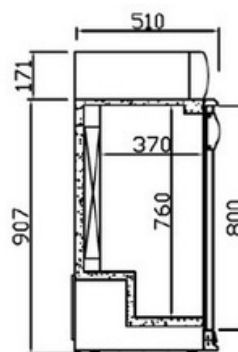

ERV25

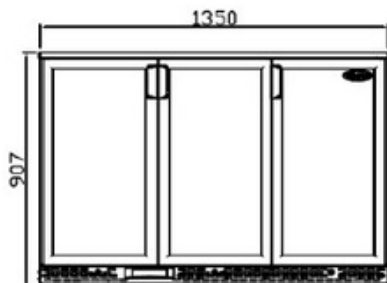

ERV35

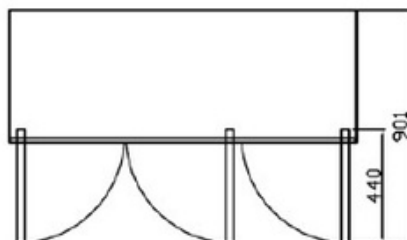

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



ERV15-ERV25-ERV35

CONEXIONES/CONNECTION / CONNEXIONS

MODELOS	A (mm)
ERV25	500
ERV25C	500
ERV35	680

