


Model:
VNZ+

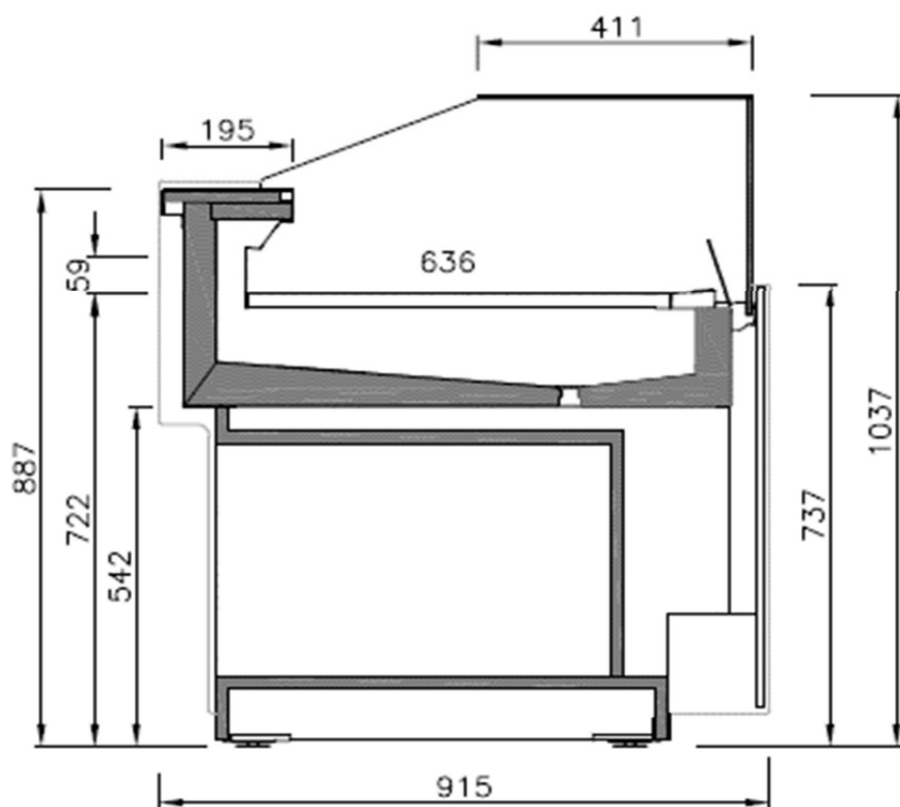


GENERAL DATA

	MODEL			
	VNZ9+	VNZ12+	VNZ15+	VNZ18+
	M2	M2	M2	M2
LENGTH (mm)	978	1290	1602	1915
SIDE WALL THICKNESS (mm)	20+20			
ELECTRONIC CONTRL	DIGITAL			
REFRIGERATED AREA (m ²)	0,6	0,8	1,0	1,2
USEABLE VOLUME (lts.)	72	96	120	144
TDA - AREA TOTAL DISPLAY (m ²)	0,557	0,742	0,927	1,113
WEIGHT (kg)	160	225	260	300
DIMENSIONS IN TRANSPORT (mm)	1100 x 1000 x 1580	1420 x 1000 x 1580	1680 x 1000 x 1580	2030 x 1000 x 1580

INSTALLATION DETAILS

DATA TABLE	MODEL	938	1250	1562	1875	-
	A (mm)	284	284	284	284	
	B (mm)	469	625	781	938	
	C (mm)	151	151	151	151	
	D (mm)	231	231	231	231	

DRAINAGE

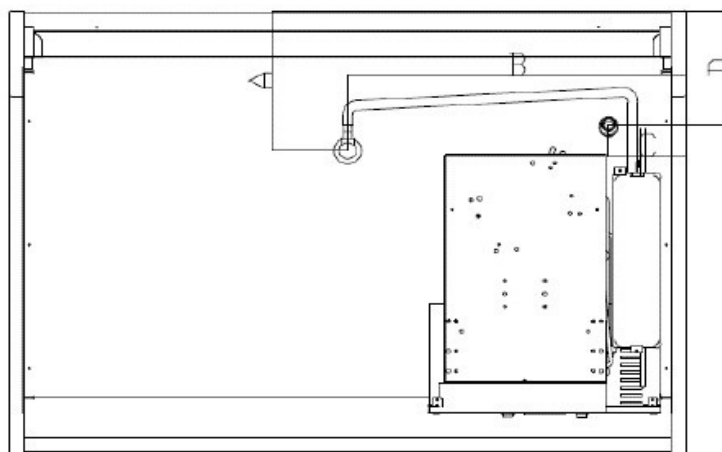

TECHNICAL CONFIGURATION

		M2 [4°C/+8°C]
INTERIOR TEMPERATURE	SET POINT	4°C
	DIFFERENTIAL	4°C
DEFROSTING SYSTEM		NATURAL
NUMBER OF DEFROSTS / 24h		4
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION TRAY	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

BASE EQUIPMENT		MODEL			
		VNZ9+	VNZ12+	VNZ15+	VNZ18+
Length (mm)		938	1250	1562	1875
COMPRESSOR	Nº	1	1	1	1
	W	171	171	358	358
	A	1,11	1,11	3,09	3,09
REFRIGERANT	Tipo	R-290			
	gr	75	75	120	145
COIL FANS	Nº	1	1	2	2
	W	4,8	4,8	4,8	4,8
	A	0,04	0,04	0,04	0,04
CONDENSATOR FANS	Nº	1	1	1	1
	W	25	25	25	25
	A	0,425	0,425	0,425	0,425
SCC "CONDENSATION CONTROL SYSTEM"	Nº	1	1	2	2
	W	15	15	15	15
	A	0,12	0,12	0,12	0,12
CANOPY LIGHTING	W	15	23	27	32
	A	0,07	0,10	0,12	0,15
POWER	W	231	238	450	455
	A	1,76	1,80	3,96	3,98
ENERGY CONSUMPTION	kWh/24h	3,6	3,7	5,4	5,9
ENERGY EFFICIENCY CLASS	[A-G]				

OPTIONAL EQUIPMENT		MODEL			
		VNZ9+	VNZ12+	VNZ15+	VNZ18+
Length (mm)		938	1250	1562	1875
COIL FANS (High Efficiency)	Nº	-	-	-	-
	W	-	-	-	-
	A	-	-	-	-
CONDENSATOR FANS (High Efficiency)	Nº	-	-	-	-
	W	-	-	-	-
	A	-	-	-	-
EVAPORATION HEATERS	W	450	450	450	450
	A	2	2	2	2