


Data Sheet

Model:
VEEU+

VEE_U+

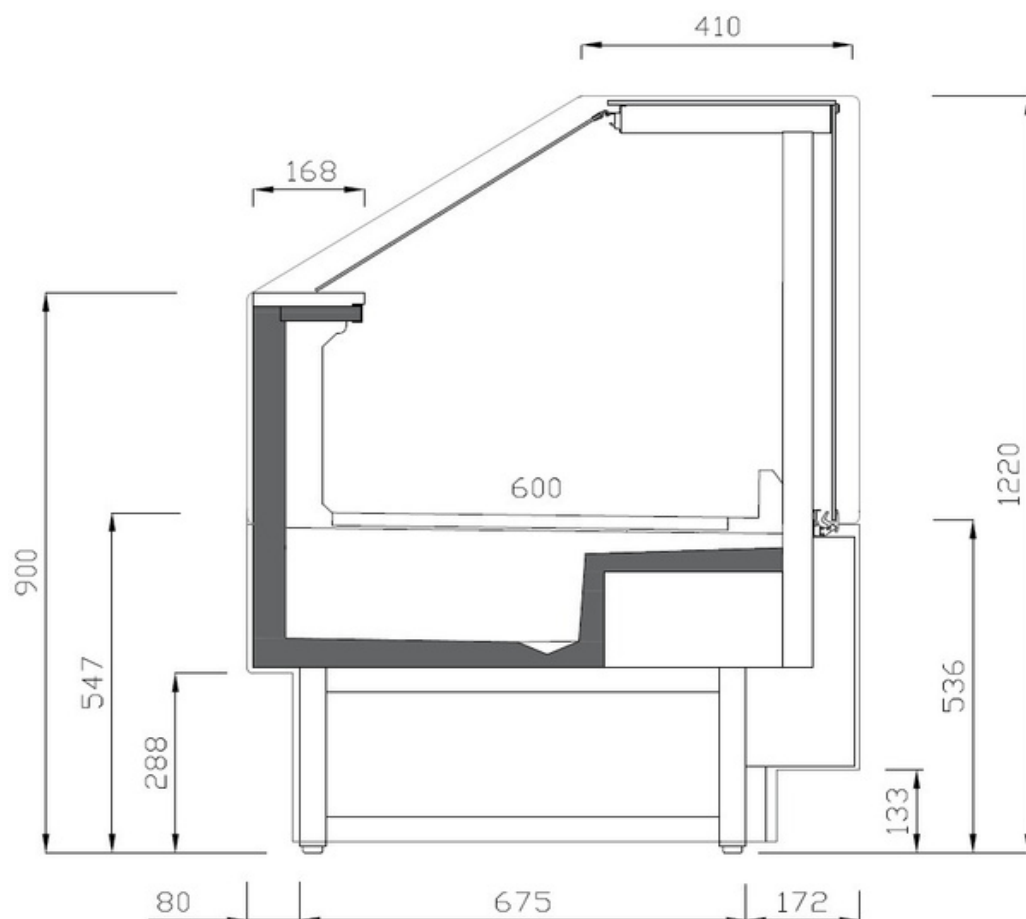

GENERAL DATA


	MODEL			
		VEE12U+	VEE18U+	VEE25U+
LENGTH (mm)		1250	1875	2500
SIDE WALL THICKNESS (mm)		30+30		
ELECTRONIC CONTRL		DIGITAL		
REFRIGERATED AREA (m ²)		0,75	1,13	1,50
USEABLE VOLUME (lts.)		150	225	300
TDA - AREA TOTAL DISPLAY		0,838	1,257	1,676
WEIGHT (kg)		200	275	300
DIMESIONS IN TRANSPORT (m)		1027 x 1455 x 1415	1027 x 1455 x 2040	1027 x 1455 x 2665

INSTALLATION DETAILS

DATA TABLE

MODEL		1250	1875	2500
A (mm)		157	157	157
B (mm)		464,2	464,2	464,2
C (mm)		170	170	170

DRAINAGE

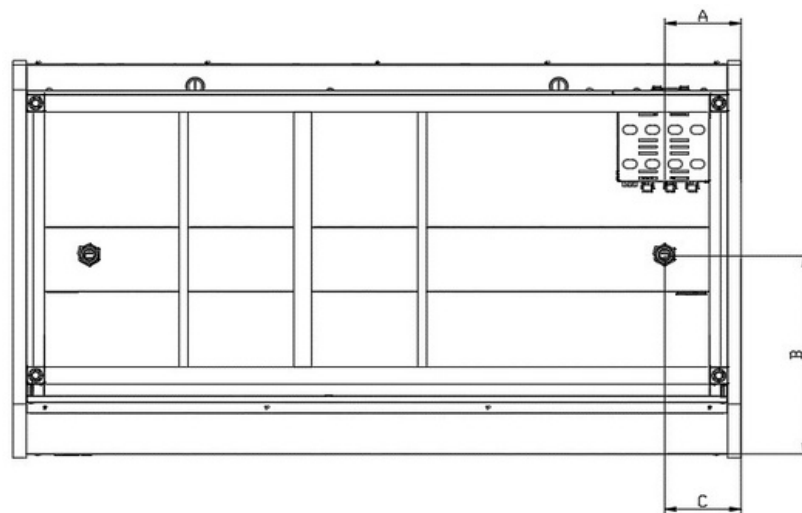

TECHNICAL CONFIGURATION

		M1 [-1°C/+5°C]
INTERIOR TEMPERATURE	SET POINT	2°C
	DIFFERENTIAL	2
DEFROSTING SYSTEM		NATURAL
NUMBER OF DEFROSTS / 24h		6
END OF DEFROSTING TEMPERATURE		8°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	Relative Humidity	Climatic Class
+30 °C	60 %	4

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION	AUX.

VOLTAGE	220 V/50 Hz
SOUND LEVEL	-

INSTALLATION DATA

BASE EQUIPMENT		MODEL		
		VEE12U+	VEE18U+	VEE25U+
Length (mm)		1250	1875	2500
COMPRESSOR	N°	1	1	1
	W	336	485	567
	A	3,04	2,7	2,7
REFRIGERANT	Tipo	R-290		
COIL FANS	N°	1	2	3
	W	25	25	25
	A	0,425	0,425	0,425
CONDESATOR FANS	N°	1	2	2
	W	25	25	25
	A	0,425	0,425	0,425
CANOPY LIGHTING	W	23,0	26,1	44,5
	A	0,10	0,12	0,20
	W	374	541	642
POWER	A	4,11	4,76	5,27
		6,98	10,76	12,81
ENERGY CONSUMPTION	kWh/24h			
ENERGY EFFICIENCY CLASS	(A-G)			

OPTIONAL EQUIPMENT		MODEL		
		VEE12+	VEE18+ 1875	VEE25+
Length (mm)		1250	15	2500
SCC "CONDENSATION CONTROL SYSTEM"	N°	1	0,12	2
	W	15		15
	A	0,12		0,12