

VGL9C



VGL9C

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Frameless panoramic glass for greater product visibility.

VGL 9C




	VGL 9C		
Operating temp	+4°C/ +8°C		
Surface exhibition	0,9		
Climate class	3 (25°C, 55%HR)		
Capacity (l)	163		
Overall dimensions LxDxH(mm)	998 x 985 x 1.345		
Cabinet Construction			
Exterior Material		Lacquered Wood	
Interior Material		Inox AISI 304	
Drain	X		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	40		
Blowing Agent	HFO		
Features			
Doors	-		
Door construction		Sliding glass door.	
Shelving	2		
Shelves dimensions LxD (mm)			
Refrigeration			
Thermostat		Digital controller	
Defrost		Manual	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount	100		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		

Power (W)	292		
Amps (A)	1,60		
Energy Consumption(kWh/24h)	-		
Crating			
Crated dimensions / Dimensions palettisation L x l x H (mm)	1.120 x 1.100 x 1.600		
Crated volume (l)	1.322		
Net Weight (kg)	15 1		
Crated Weight (kg)	163		
Options			
		Rear sliding doors	

VGL9C

ELEVATION

RIGHT VIEW

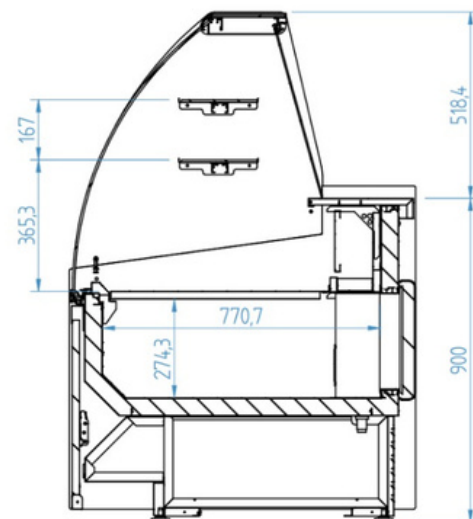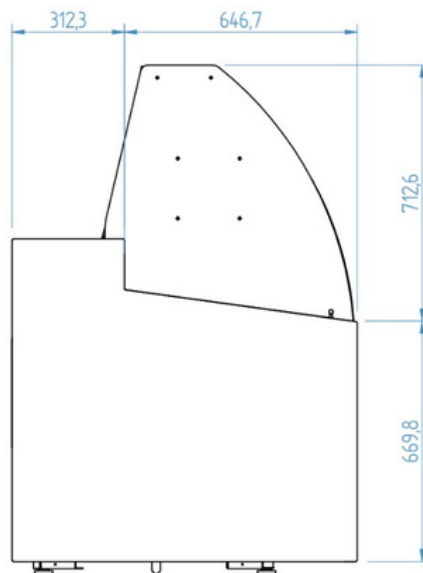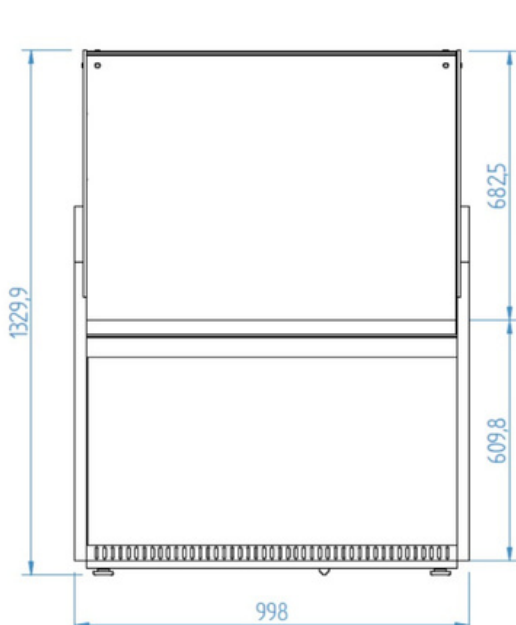

VGL 9C

www.infrico.com
info@infrico.com
Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



VGL 12C



VGL 12C

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Frameless panoramic glass for greater product visibility.

Rev: 01 Fecha/Date: 08/09/2025 FI_VGL12C_00_01


VGL 12C

	VGL 12C		
Operating temp	+4°C/ +8°C		
Surface exhibition	1,2		
Climate class	3 (25°C, 55%HR)		
Capacity (l)	216		
Overall dimensions LxDxH(mm)	1.310 x 985 x 1.345		
Cabinet Construction			
Exterior Material		Lacquered Wood	
Interior Material		Inox AISI 304	
Drain	X		
LED lighting	✓		
Insulation thickness (mm)		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	40		
	HFO		
Features			
Doors	-		
Door construction		Sliding glass door.	
Shelving	2		
Shelves dimensions LxD (mm)			
Refrigeration			
Thermostat		Digital controller	
Defrost		Manual	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount	120		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	687		



Power (W)	451		
Amps (A)	2,84		
Energy Consumption(kWh/24h)	-		
Crating			
Crated dimensions / Dimensions palettisation L x l x H (mm)	1.120 x 1.100 x 1.600		
Crated volume (l)	1.322		
Net Weight (kg)	15 1		
Crated Weight (kg)	170		
Options			
		Rear sliding doors	

VGL12C

ELEVATION

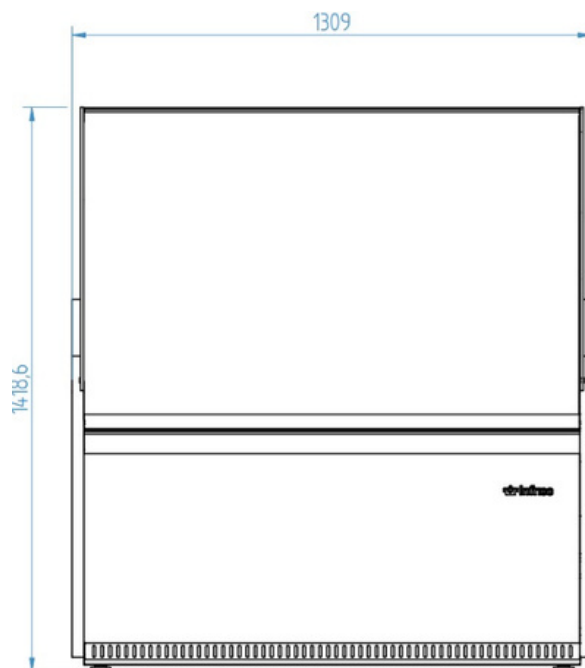

RIGHT VIEW

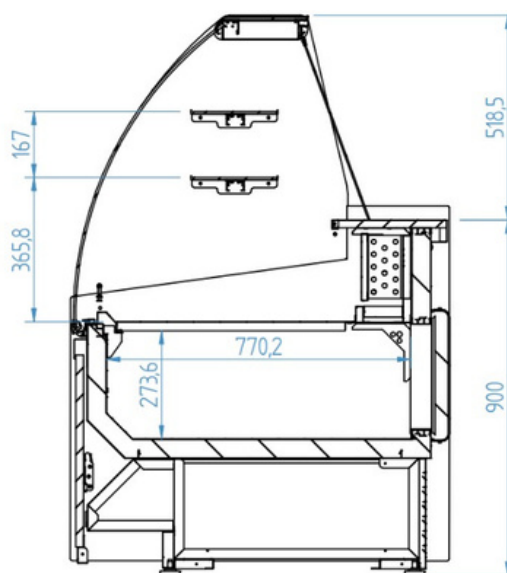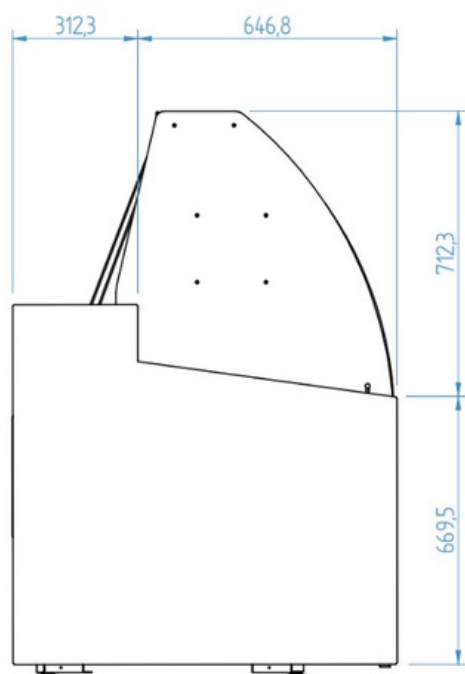

VGL 12C

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



VGL15C



VGL 15C

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Frameless paronamic glass for greater product visibility.

Rev: 01 Fecha/Date: 08/09/2025 FT_VGL15C_00_01


VGL 15C

	VGL 15C		
Operating temp	+4°C/ +8°C		
Surface exhibition	1,5		
Climate class	3 (25°C, 55%HR)		
Capacity (l)	271		
Overall dimensions LxDxH(mm)	1.622 x 985 x 1.345		
Cabinet Construction			
Exterior Material		Lacquered Wood	
Interior Material		Inox AISI 304	
Drain	X		
LED lighting	✓		
Insulation thickness (mm)		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	40		
	HFO		
Features			
Doors	-		
Door construction		Sliding glass door.	
Shelving	2		
Shelves dimensions LxD (mm)			
Refrigeration			
Thermostat		Digital controller	
Defrost		Manual	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount	130		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	687		



Power (W)	451		
Amps (A)	2,84		
Energy Consumption(kWh/24h)	-		
Crating			
Crated dimensions / Dimensions palettisation L x l x H (mm)	1.750 x 1.100 x 1.600		
Crated volume (l)	2.171		
Net Weight (kg)	20 8		
Crated Weight (kg)	233		
Options			
		Rear sliding doors	

VGL15C

ELEVATION

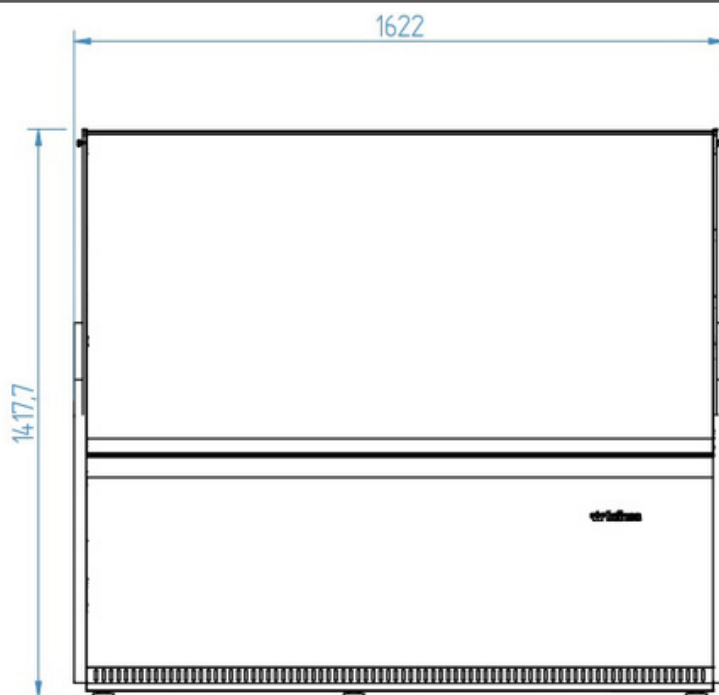

RIGHT VIEW

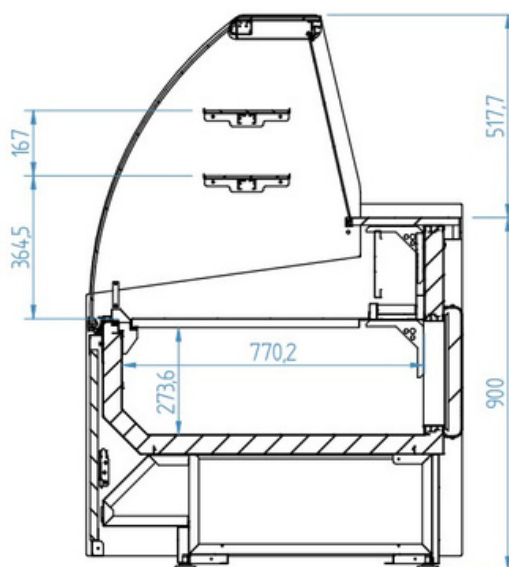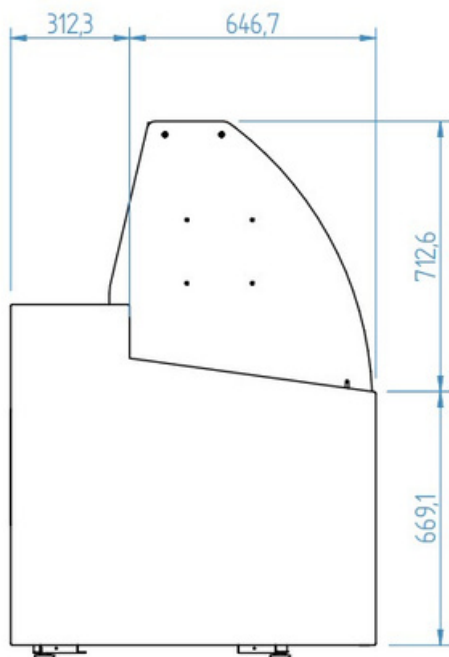

VGL 15C

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



VGL18C



VGL 18C

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Frameless paronamic glass for greater product visibility.

Rev: 01 Fecha/Date: 08/09/2025 FI_VGL18C_00_01


VGL 18C

	VGL 18C		
Operating temp	+4°C/ +8°C		
Surface exhibition	1,8		
Climate class	3 (25°C, 55%HR)		
Capacity (l)	327		
Overall dimensions LxDxH(mm)	1.935 x 985 x 1.345		
Cabinet Construction			
Exterior Material		Lacquered Wood	
Interior Material		Inox AISI 304	
Drain	X		
LED lighting	✓		
Insulation thickness (mm)		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	40		
	HFO		
Features			
Doors	-		
Door construction		Sliding glass door.	
Shelving	2		
Shelves dimensions LxD (mm)			
Refrigeration			
Thermostat		Digital controller	
Defrost		Manual	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount	140		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	951		


Power (W)	613		
Amps (A)	3,53		
Energy Consumption(kWh/24h)	-		
Crating			
Crated dimensions / Dimensions palettisation L x l x H (mm)	1.750 x 1.100 x 1.600		
Crated volume (l)	2.171		
Net Weight (kg)	20 8		
Crated Weight (kg)	233		
Options			
		Rear sliding doors	

VGL18C

ELEVATION

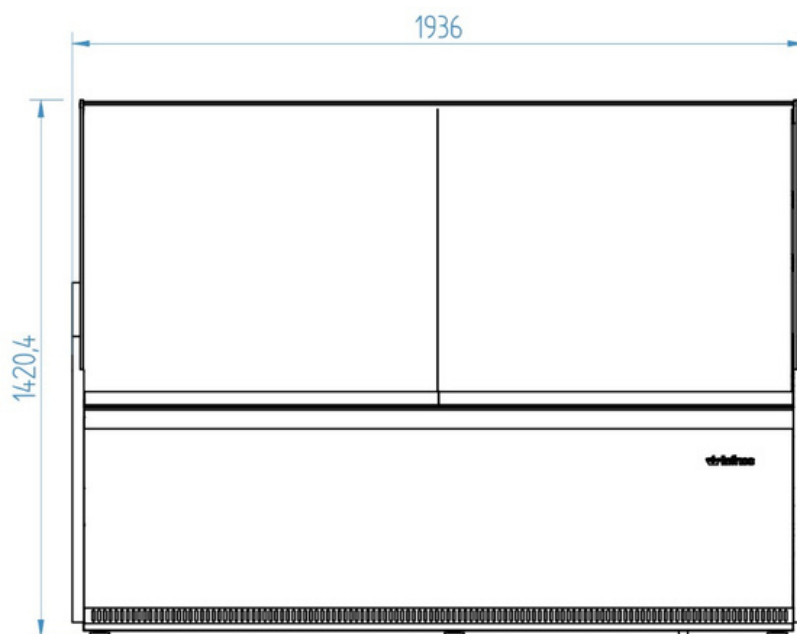

RIGHT VIEW

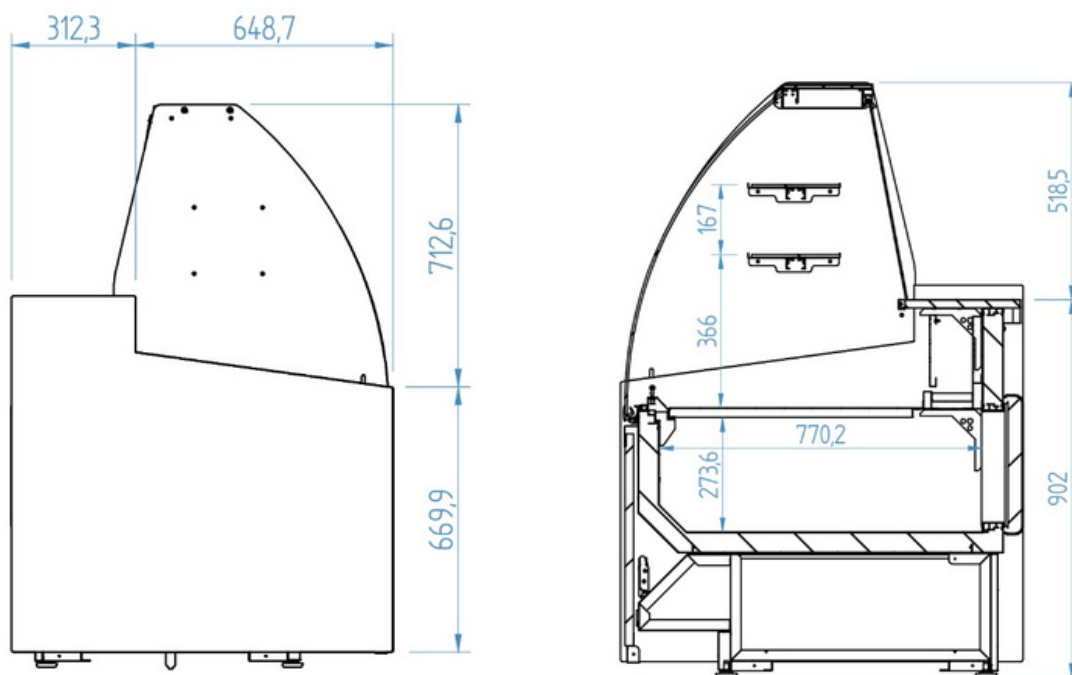

VGL 18C

www.infrico.com
info@infrico.com


Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



VGL25C

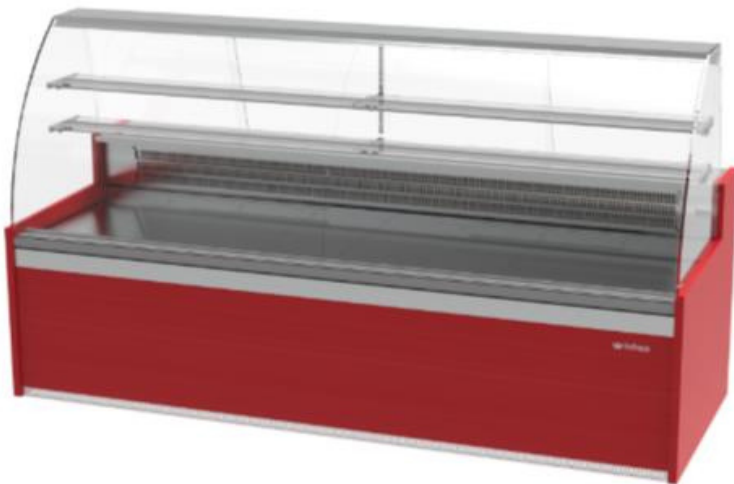

VGL 25C

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.
- ✓ Larger capacity.
- ✓ Frameless paronamic glass for greater product visibility.

Rev: 01 Fecha/Date: 08/09/2025 FT_VGL25C_00_01


VGL 25C

	VGL 25C		
Operating temp	+4°C/ +8°C		
Surface exhibition	2,5		
Climate class	3 (25°C, 55%HR)		
Capacity (l)	430		
Overall dimensions LxDxH(mm)	2.560 x 985 x 1.345		
Cabinet Construction			
Exterior Material		Lacquered Wood	
Interior Material		Inox AISI 304	
Drain	X		
LED lighting	✓		
Insulation thickness (mm)		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Blowing Agent	40		
	HFO		
Features			
Doors	-		
Door construction		Sliding glass door.	
Shelving	2		
Shelves dimensions LxD (mm)			
Refrigeration			
Thermostat		Digital controller	
Defrost		Manual	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	
Technical Features			
Refrigerant	R290		
Ref amount	150		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	951		



Power (W)	653		
Amps (A)	3,70		
Energy Consumption(kWh/24h)	-		
Crating			
Crated dimensions / Dimensions palettisation L x l x H (mm)	1.750 x 1.100 x 1.600		
Crated volume (l)	3.426		
Net Weight (kg)	25 9		
Crated Weight (kg)	283		
Options			
		Rear sliding doors	

VGL25C

ELEVATION

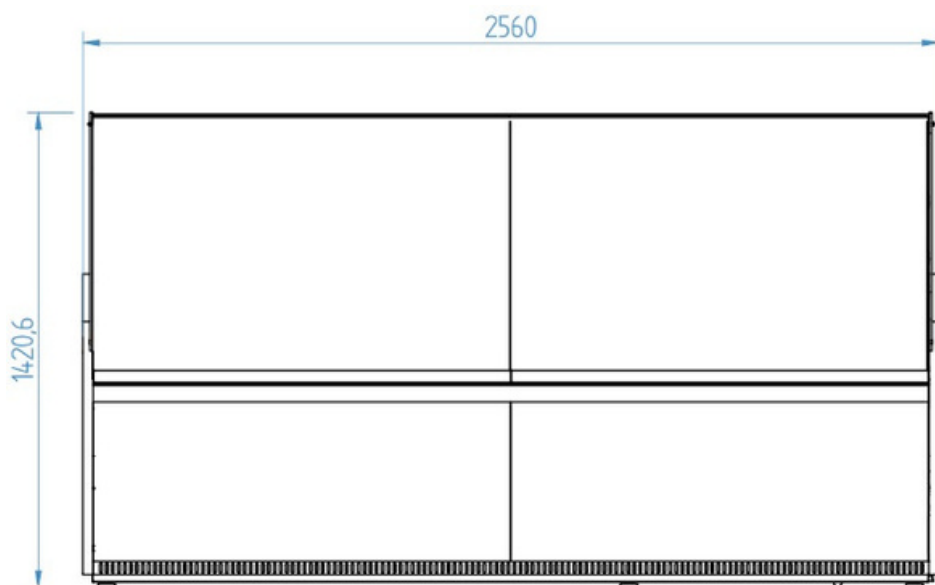

RIGHT VIEW

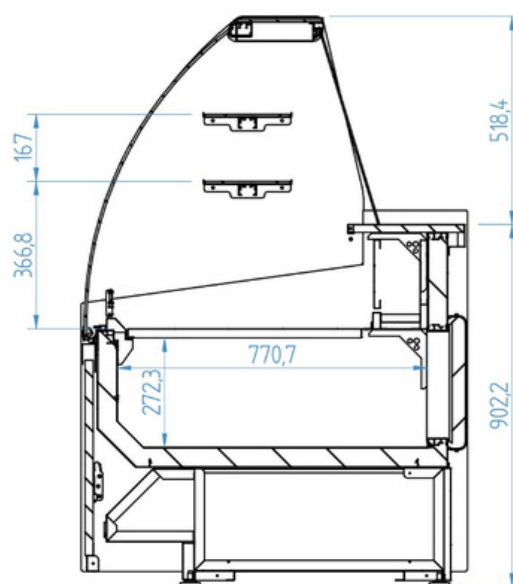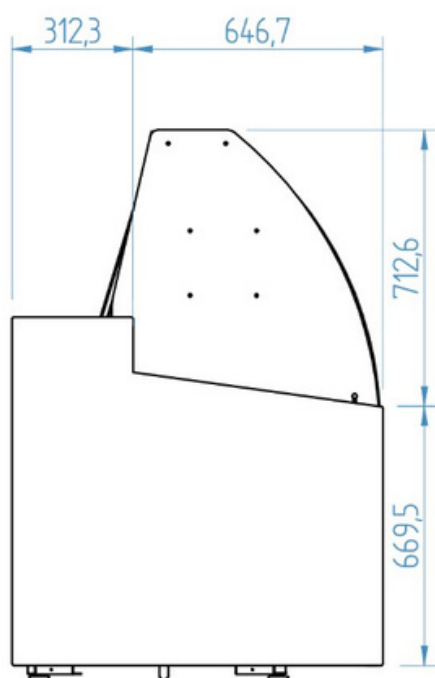

VGL 25C

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

