



VMR 12P

STRENGTHS

- ✓ Greater precision in temperature control.
- ✓ Incorporation of LED lighting, reducing energy consumption between 80% and 90%.

VML12P - VML15P – VML18P

Rev: 07/04/2026

		VML12P- VML15P – VML18P	
Operating temp	-1°C / +1°C		
Climate class	4 (38°C, 55%HR)		
Capacity (l)	115 237 360		
Overall dimensions LxDxH (mm)	1.320 x 970 x 1.160 1.630 x 970 x 1.160 1.940 x 970 x 1.160		
Cabinet Construction			
Exterior Material		AISI 304 stainless steel	
Interior Material		AISI 304 stainless steel	
Interior Construction		Enamelled steel bench	
Drain	✓		
LED lighting	✓		
Insulation		Polyurethane with high density 40kg/m3, CFCs free, zero ODP and low GWP	
Insulation thickness (mm)	70		
Blowing Agent	HFO		
Features			
Doors	2 3 3		
Door construction		Plexi rear sliding doors.	
Door lock	✗		
Shelving	✗		
Shelves dimensions LxD (mm)	✗		
Legs, casters		Levellers,casters	
Refrigeration			
Thermostat		Digital controller	
Defrost		Hot gas	
Expansion Device		Capillary	
Electronic fans	✓		
Condensation		Ventilated	
Evaporation		Semistatic	

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)




Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

Technical Features			
Refrigerant	R290-a		
Ref amount (gr)	120		
	120		
	140		
Power Supply	230V / 1 / 50 Hz		
Refrigeration Capacity (W)	370		
	687		
	768		
Power (W)	410		
	410		
	520		
Amps (A)	1,39		
	2,67		
	2,67		
Energy Consumption (kWh/24h)	-		
Crating			
Crated dimensions L x l x H (mm)	1.430 x 990 x 1.540		
	1.795 x 990 x 1.540		
	2.065 x 1.005 x 1.540		
Crated volume (l)	1.477		
	1.828		
	2.444		
Net Weight (kg)	212		
	267		
	363		
Crated Weight (kg)	237		
	293		
	387		
Options			
		115 V / 1 ph / 60Hz	
		220 V / 1 ph / 60 Hz	

ELEVATION

PLAN VIEW

RIGHT VIEW

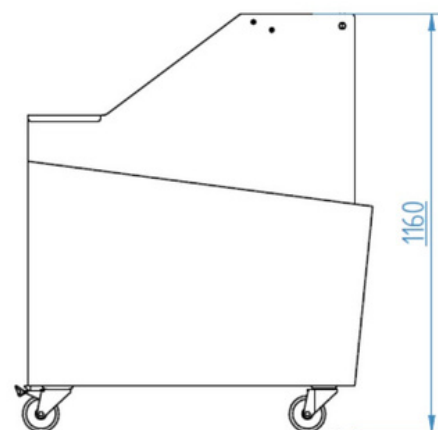
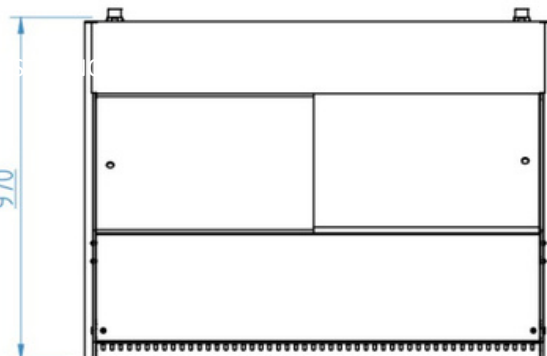
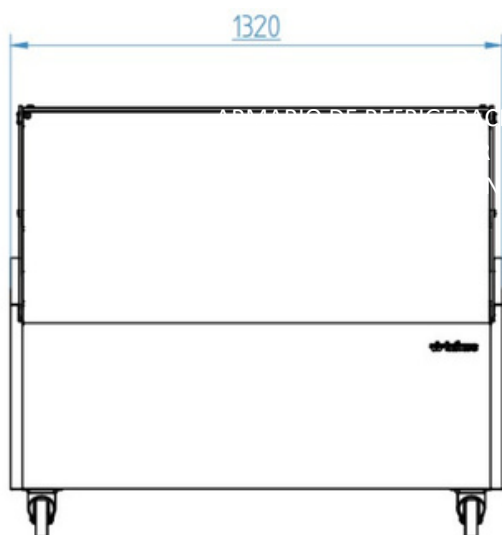


VMR 12P

ELEVATION


PLAN VIEW

RIGHT VIEW

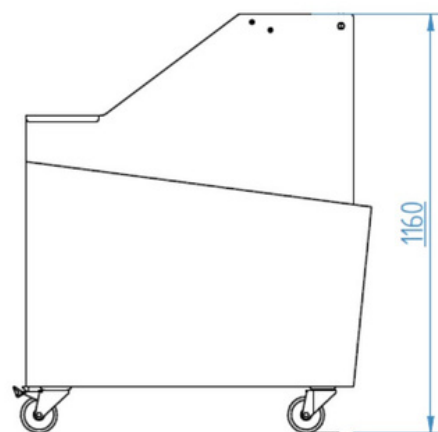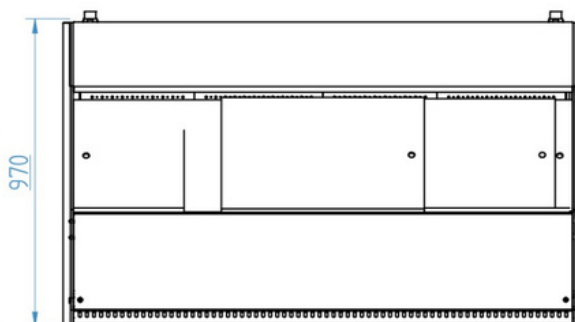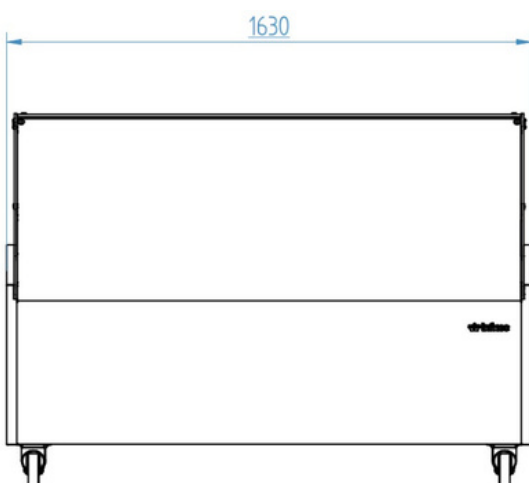


VMR 15P

ELEVATION

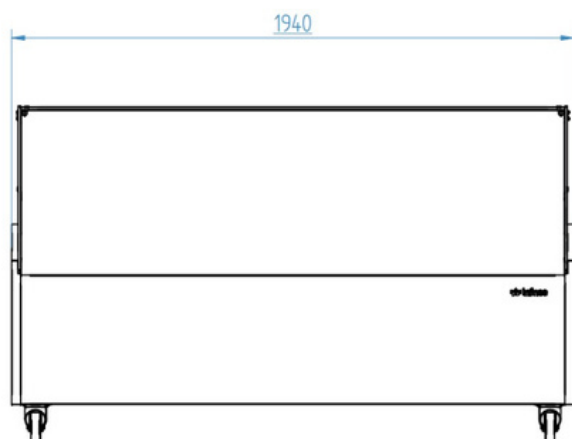


VMR 18P

PLAN VIEW

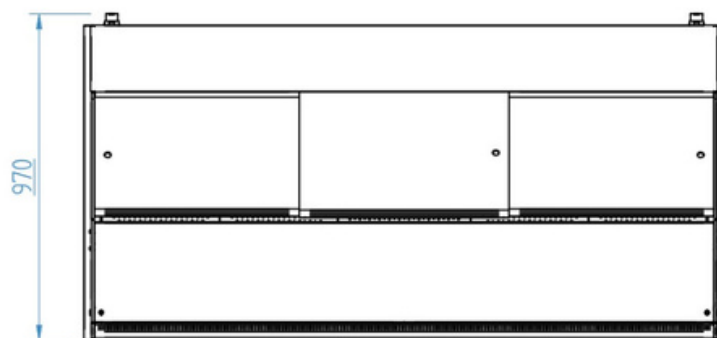

RIGHT VIEW

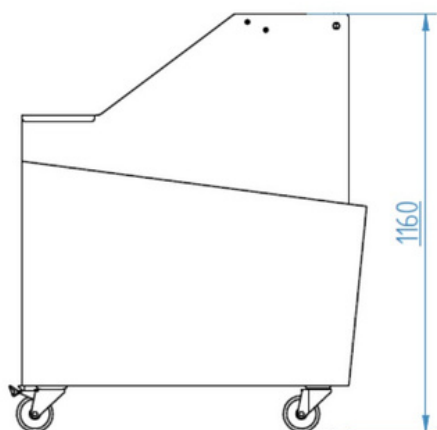

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice
 Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis