


Data Sheet

Model:
VCT_UCP

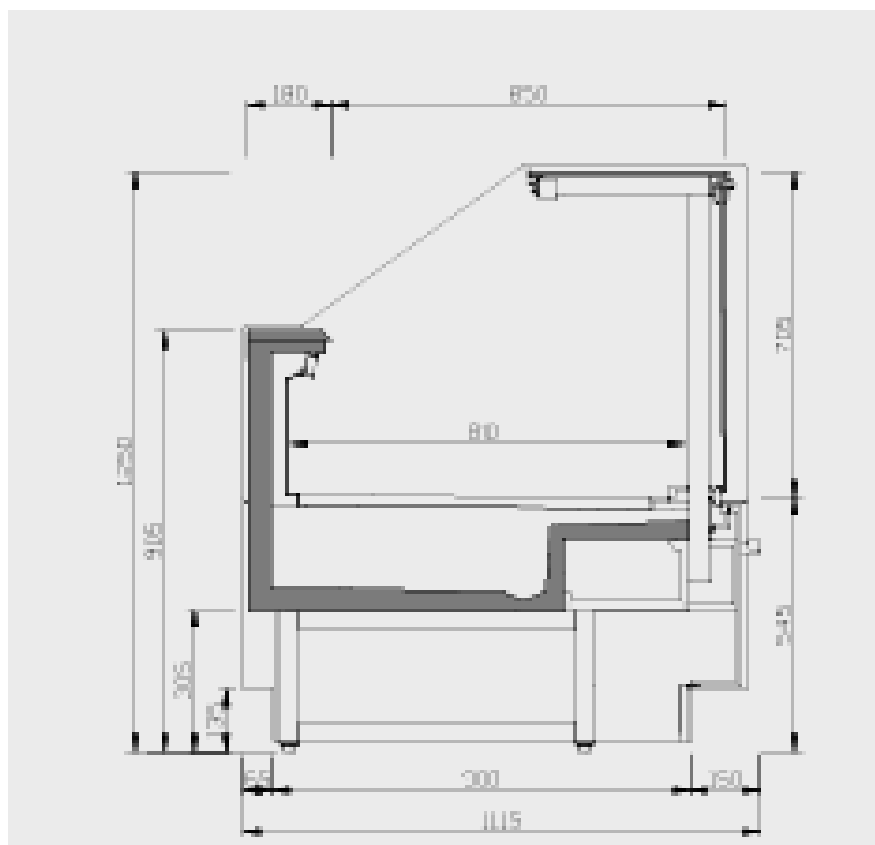


GENERAL DATA

	MODELO						
	VCT09UCP	VCT12UCP	VCT15UCP	VCT18UCP	VCT25UCP	VCT31UCP	VCT37UCP
LENGTH (mm)	938	1250	1562	1875	2500	3125	3750
SIDE WALL THICKNESS (mm)	30+30						
ELECTRONIC CONTROL	DIGITAL						
REFRIGERATED AREA (m ²)	0,75	1,00	1,25	1,50	2,00	2,50	3,00
USABEL VOLUME (lts.)	225	300	375	450	600	750	900
TDA - TOTAL DISPLAY AREA (m ²)	0,97	1,29	1,62	1,94	2,59	3,23	3,88
WEIGHT (kg)	175 1095 x	195 1405 x	210 1715 x	230 2030 x	285 2655 x	380 3280 x	440 3905 x
DIMENSIONS IN TRANSPORT (mm)	1170 x 1437	1170 x 1437	1170 x 1437	1170 x 1437	1170 x 1437	1170 x 1437	1170 x 1437

INSTALLATION DETAILS

DATA TABLE	MODEL	938	1250	1562	1875	2500	3125	3750
	A (mm)	169	169	169	169	169	169	169
	B (mm)	604	604	604	604	604	604	604
	C (mm)	101	101	101	101	101	101	101
	D (mm)	49	49	49	49	49	49	49
	E (mm)	349	349	349	349	349	349	349
	F (mm)	282	282	282	282	282	282	282
	G (mm)	273	273	273	273	273	273	273
	H (mm)	-	-	-	966	1280	1571	1884

LEGS / DRAINAGE

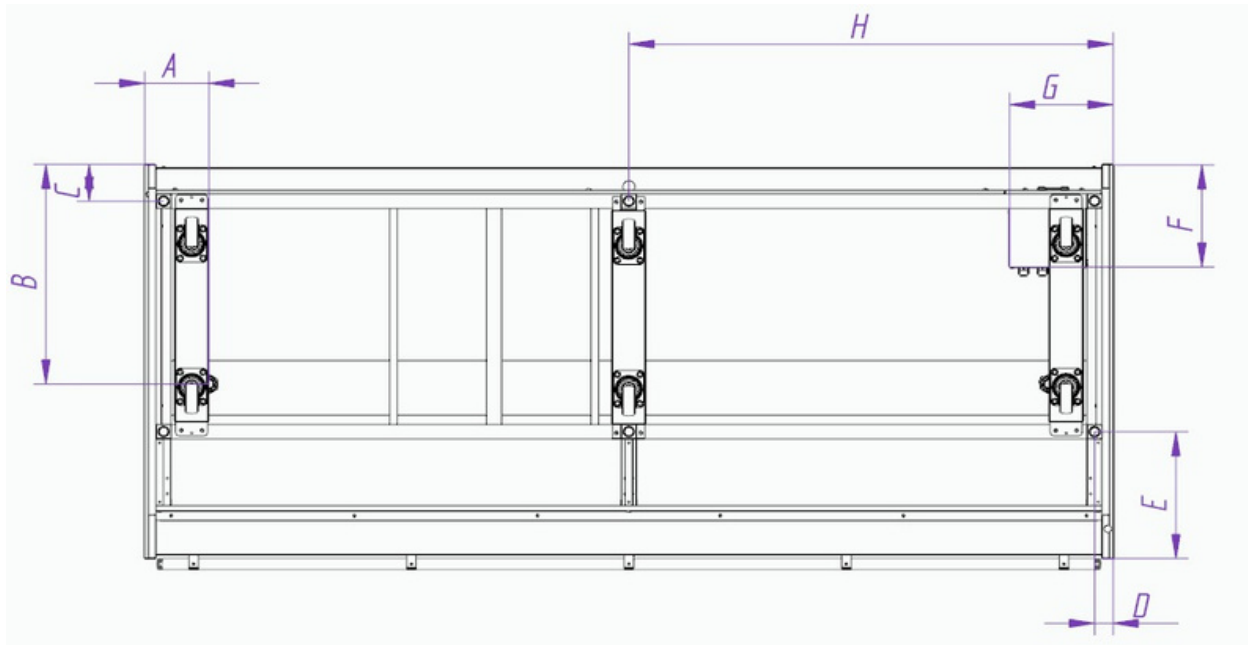

TECHNICAL CONFIGURATION

		M1 [-1°C/+5°C]
INTERIOR TEMPERATURE	SET POINT	0°C
	DIFFERENTIAL	2°C
DEFROSTING SYSTEM		HOT GAS
NUMBER OF DEFROSTS / 24h		8
END OF DEFROSTING TEMPERATURE		10°C
MAXIMUM DEFROSTING TIME		30'

In compliance with EN ISO23953-1/-2

Ambient Temp.	R.Humidity	Climatic Class
+25 °C	60 %	3

EVAPORATION	VENTILATED
CONDENSATION	VENTILATED
EVAPORATION WATER COLLECTION	AUX.

VOLTAGE	230 V/50-60 Hz
SOUND LEVEL	63dB

INSTALLATION DATA

ÉQUIPEMENT DE BASE		MODELE						
		VCT09UCP	VCT12UCP	VCT15UCP	VCT18UCP	VCT25UCP	VCT31UCP	VCT37UCP
Length (mm)		938	1250	1562	1875	2500	3125	3750
COMPRESSOR	N°	1	1	1	1	1	2	2
	W	336	476	531	623	1077	1077	1077
	A	3,04	3,01	2,89	2,96	5,41	5,41	5,41
REFRIGERANT	Tipo	R-290						
	gr	90	120	145	190	200	200+200	230+230
COIL FANS	N°	1	1	2	2	3	6	7
	W	14	14	14	14	14	14	14
	A	0,06	0,06	0,12	0,12	0,18	0,37	0,43
CONDENSER FANS	N°	1	2	2	2	2	2	2
	W	31	31	31	31	31	31	31
	A	0,13	0,27	0,27	0,27	0,27	0,27	0,27
CANOPY LIGHTING	W	16,9	22,5	28,1	33,8	45,0	56,3	67,5
	A	0,07	0,10	0,12	0,15	0,20	0,24	0,29
	N°	1	2	3	3	4	5	6
SCC "CONDENSATION CONTROL SYSTEM"	W	5,6	5,6	5,6	5,6	5,6	5,6	5,6
	A	0,02	0,05	0,07	0,07	0,10	0,12	0,15
	W	450	450	450	450	450	450	450
TRAY HEATER *	A	2,0	2,0	2,0	2,0	2,0	2,0	2,0
	W max	403	586	666	764	1248	2384	2415
POWER	A max	3,3	3,8	4,0	4,1	7,1	14,4	15,5
	kWh/24h	8,08	11,75	13,22	15,16	24,84	47,78	48,19

SCC and evaporation resistance not included in the consumption as it is an optional component in operation
The evaporation resistance requires a separate plug